

# Gypsum Cell



Downlights | 3 x powerLEDs 6 W DC 630 mA | CRI 90  
64546W15



160 x  
90

Technische Daten	
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	powerLEDs
Optik	Spot
Light emission direction	downward
Lampe Nennleistung	6 W DC
Lichtstrom (Lichtquelle)	636 lm
Eingangsspannungsbereich	630mA
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	CC
Isolierklasse	3
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.170 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.500 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein
Technische Merkmale des Produkts	TVS

## Oberfläche Gehäuse

Material	gesso
Farbe	Weiß

## Oberfläche Diffusor

Material	Polyamid
Farbe	Schwarz

## Oberfläche strahler

Material	Aluminium 6060
Farbe	Schwarz eloxiert
Bearbeitungstyp	Anodisierung 15 µm

## Elektronik



99105  
On/Off Driver 198~264V AC (2 - 4 art.)



99376  
On/Off Driver 198~264V AC (1 - 2 art.)



C-E100001  
Push and Simply Dim - DALI-2 Multi Power 198~264V AC / 180~275V DC (2 - 4 art.)

## Cables Electrification

Cable connector	No
-----------------	----

Downlights | 3 x powerLEDs 6 W DC 630 mA | CRI 90  
**64546W15**


Single emission recessed downlights for indoor application. The warm white LED light source with a spot light distribution is composed of 3 powered LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 636 lm, with a 106.0 lm/W nominal luminous efficacy.

The device body is made of plaster and features a white finish; the diffuser is made of polyamide. The ingress protection degree is IP20; the total weight is of 0.500 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 6 W. The power supply cable is included and features a 0.170 m length.

The device features protection class III and can be ceiling-mounted, with a 160 x 90 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

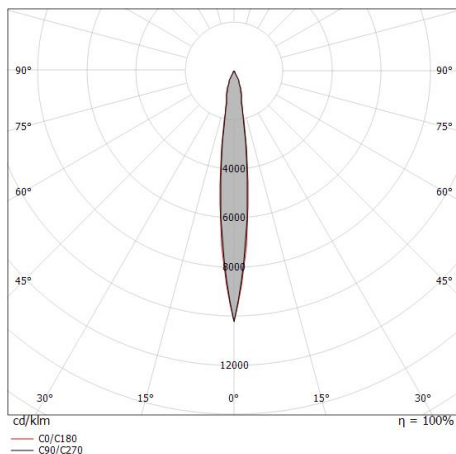

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.11 0.11	E(0°) 14710 E(C90) 6.0° 7276 E(C0) 6.4° 7276
1.0	0.21 0.22	E(0°) 3678 E(C90) 6.0° 1819 E(C0) 6.4° 1819
1.5	0.32 0.34	E(0°) 1634 E(C90) 6.0° 808 E(C0) 6.4° 808
2.0	0.42 0.45	E(0°) 919 E(C90) 6.0° 455 E(C0) 6.4° 455
2.5	0.53 0.56	E(0°) 588 E(C90) 6.0° 291 E(C0) 6.4° 291
3.0	0.63 0.67	E(0°) 409 E(C90) 6.0° 202 E(C0) 6.4° 202

— C0/C180 (Half-peak divergence: 12.8°)  
 — C90/C270 (Half-peak divergence: 12.0°)

### Energieeffizienzklasse

ieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.

### Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	56 %
Lichtstrom (Lichtquelle)	636 lm
Leuchten Lichtstrom	360 lm
Consumption	6 W
Leuchten Lichtausbeute	60 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

### LED Life / Failure Ratio

L70 B20 C0 214455h (at Tj 60 Ta 25 )

### UGR


UGR axial	6.5
UGR transversal	7.7
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

Optik C0/C180	12°
Light distribution simmetry	Symmetrical



Gypsum Cell | Downlights | Accessories  
**64546W15**

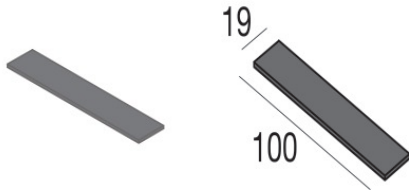

Dicken - KIT Dicken für die Montage auf Gipskarton

**Code**

60830