


Gypsum Cell



Downlights | 9 x powerLEDs 18 W DC 630 mA | CRI 90
64551M45



Technische Daten	
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	powerLEDs
Optik	Medium Wide Flood
Light emission direction	downward
Lampe Nennleistung	18 W DC
Lichtstrom (Lichtquelle)	1791 lm
Eingangsspannungsbereich	630mA
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	CC
Isolierklasse	3
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.170 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.945 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein
Technische Merkmale des Produkts	TVS

Oberfläche Gehäuse	
Material	gesso
Farbe	Weiß

Oberfläche Diffusor	
Material	ABS
Farbe	Weiß

Oberfläche strahler	
Material	Aluminium 6060
Farbe	Schwarz eloxiert
Bearbeitungstyp	Anodisierung 15 µm

Elektronik



99115
1-10V - N/O button Multi Power 198~264V AC / 180~275V DC



99105
On/Off Driver 198~264V AC



C-E100001
Push and Simply Dim - DALI-2 Multi Power 198~264V AC / 180~275V DC

Downlights | 9 x powerLEDs 18 W DC 630 mA | CRI 90
64551M45

Single emission recessed downlights for indoor application. The super warm white LED light source is composed of 9 powered LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 1791 lm, with a 99.5 lm/W nominal luminous efficacy.

The device body is made of plaster and features a white finish; the diffuser is made of ABS. The ingress protection degree is IP20; the total weight is of 0.945 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 18 W. The power supply cable is included and features a 0.170 m length.

The device features protection class III and can be ceiling-mounted, with a 160 x 160 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält 3 Lichtquellen der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	63 %
Lichtstrom (Lichtquelle)	1791 lm
Leuchten Lichtstrom	1134 lm
Consumption	18 W
Leuchten Lichtausbeute	63 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio


L70 B20 C0 214455h (at Tj 60 Ta 25)

UGR

UGR axial	9.1
UGR transversal	8.7
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C0/C180	49°
Light distribution simmetry	Symmetrical

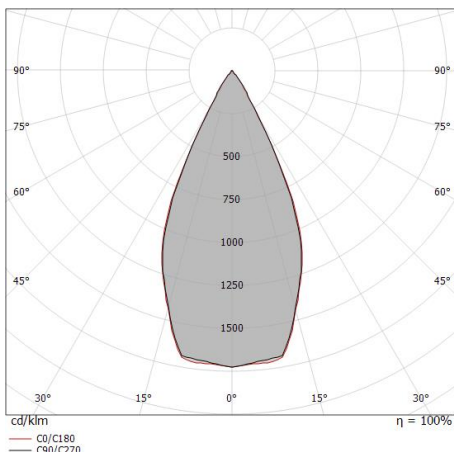

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.45 0.46	E(0°) 7833 E(C90) 24.4° 2975 E(C0) 24.6° 2969
1.0	0.91 0.92	E(0°) 1958 E(C90) 24.4° 744 E(C0) 24.6° 742
1.5	1.36 1.37	E(0°) 870 E(C90) 24.4° 331 E(C0) 24.6° 330
2.0	1.81 1.83	E(0°) 490 E(C90) 24.4° 186 E(C0) 24.6° 186
2.5	2.27 2.29	E(0°) 313 E(C90) 24.4° 119 E(C0) 24.6° 119
3.0	2.72 2.75	E(0°) 218 E(C90) 24.4° 83 E(C0) 24.6° 82

— C0/C180 (Half-peak divergence: 49.2°)
 — C90/C270 (Half-peak divergence: 48.8°)



Dicken - KIT Dicken für die Montage auf Gipskarton

Code

60830