



Vedette_Q Asymm Double emission

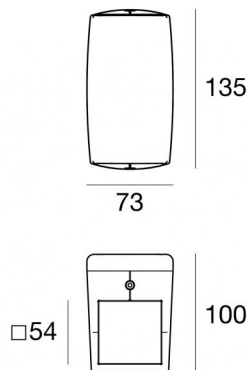

Wandleuchten | 198-264 V
4 arrayLED 13.5 W DC - 16.5 W AC | CRI 80

81580N63



| Technische Daten | |
|---|---------------------------|
| Typ | Oberfläche |
| Installationsposition | Wand |
| Installationsumgebung | Outdoor |
| Lichtquelle | LED |
| Circuit structure | arrayLED |
| Optik | Asymmetric + Medium Flood |
| Light emission direction | downward and upward |
| Lampe Nennleistung | 13.5 W DC |
| Gesamtleistung | 16.5 W |
| Lichtstrom (Lichtquelle) | 1730 lm |
| Nominale Eingangsspannung | 220 - 240 V AC |
| Eingangsspannungsbereich | 198 - 264 V AC |
| Frequency | 50 - 60 Hz |
| Ähnlichste Farbtemperatur / Tone | 4000 K |
| Farbwiedergabeindex | 80 Ra |
| Gleichstrom/Gleichspannung | AC |
| Isolierklasse | 1 |
| IP | IP65 |
| IK | IK07 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Driver |
| Leuchte dimmbar | Nein |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Ja |
| Kabellänge | 1 m |
| Harzbeschichtung | Nein |
| Typ Lichtabstrahlung | Zweiflammig |
| Nettogewicht | 2.02 Kg |
| Schutz vor elektrostatischen Entladungen | 4 KV |
| Schutz vor Stoßspannungen | 4 KV |
| Technische Merkmale des Produkts | Acquastop - TVS |

Oberfläche Gehäuse

| | |
|-----------------|---|
| Material | Stranggepresstes Aluminium EN AB - 46100 |
| Farbe | Grau |
| Bearbeitungstyp | Offenporige Anodisierung + Pulverlackierung |

Oberfläche Diffusor

| | |
|-----------------|------------------------------|
| Material | Extra-helles Glas - Gehärtet |
| Farbe | transparent |
| Bearbeitungstyp | Siebdruck |

Cables Electrification

| | |
|-----------------|----|
| Cable connector | No |
|-----------------|----|

Vedette_Q Asymm Double emission



Wandleuchten | 198-264 V | 4 arrayLED 13.5 W DC - 16.5 W AC | CRI 80
81580N63

Double emission wall lights for outdoor application. The natural white LED light source with a asymmetric + medium flood light distribution is composed of 4 arrayed LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 1730 lm, with a 128.1 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a grey finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP65; the total weight is of 2.02 kg.

The total absorbed power is 16.5 W. The power supply cable is included and features a 1 m length.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften

| | |
|---------------------------------------|----------------|
| Light Output Ratio (LOR) | 79 % |
| Lichtstrom (Lichtquelle) | 1730 lm |
| Leuchten Lichtstrom | 1381 lm |
| Consumption | 16.5 W |
| Leuchten Lichtausbeute | 83 lm/W |
| Farbtemperatur | 4000 K |
| Standard Deviation of Colour Matching | 2 Step MacAdam |
| Farbwiedergabeindex | 80 Ra |
| Black Body Locus | On |

| | |
|-----------------------------|-------------|
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 40°C |

LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25)

OPTICAL

| | |
|-----------------------------|--------------|
| Optik C0/C180 | 76° |
| Light distribution simmetry | Asymmetrical |

