



Uplights | 1 x powerLED 3 W DC 1000 mA | CRI 80
C01052ISWSP

Single emission uplights for outdoor application. The warm white LED light source with a spot light distribution is composed of 1 powerLED LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 432 lm, with a 144.0 lm/W nominal luminous efficacy.

The device body is made of aisi 316l steel and features a steel finish, processed by means of shot peening. The ingress protection degree is IP67; the total weight is of 0.130 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 3 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 84918(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

ieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	64 %
Lichtstrom (Lichtquelle)	432 lm
Leuchten Lichtstrom	279 lm
Consumption	3 W
Leuchten Lichtausbeute	93 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	1.5 Step
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio


L70 B10 C0 361980h (at Tj 60 Ta 25)

UGR

UGR axial	13.8
UGR transversal	13.9
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C0/C180	10°
Light distribution simmetry	Symmetrical

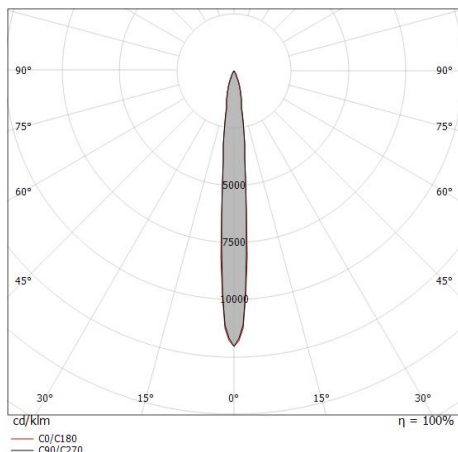

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.09 0.09	E(0°) 13423 E(C90) 5.1° 6667 E(C0) 5.2° 6735
1.0	0.18 0.18	E(0°) 3256 E(C90) 5.1° 1667 E(C0) 5.2° 1684
1.5	0.27 0.27	E(0°) 1491 E(C90) 5.1° 741 E(C0) 5.2° 748
2.0	0.36 0.36	E(0°) 839 E(C90) 5.1° 417 E(C0) 5.2° 421
2.5	0.45 0.46	E(0°) 537 E(C90) 5.1° 267 E(C0) 5.2° 269
3.0	0.54 0.55	E(0°) 373 E(C90) 5.1° 185 E(C0) 5.2° 187

— C0/C180 (Half-peak divergence: 10.4°)
 — C90/C270 (Half-peak divergence: 10.2°)



Beret_2R | Uplights | Accessories
C01052ISWSP



Einbaugehäuse

installationsposition: boden; typ installation: mauerwerk L=87mm, H=60mm, D=60mm.

Material:Kunststoff ABS, farbe:Schwarz.

Code

84918