


Oh!_FL65 LED



Floor Lamp | 220-240 V
1 topLED 26 W DC - 27 W AC | CRI 80

16193



Ø 740

| Technical data | |
|--|-----------------|
| Type | Floor Lamp |
| Installation position | Floor |
| Installation environment | Outdoor |
| Light Source | LED |
| Circuit structure | topLED |
| Optics | Diffused |
| Light emission direction | downward |
| Nominal power | 26 W DC |
| Total Power | 27 W |
| Source lumens | 3835 lm |
| Nominal input voltage | 220 - 240 V AC |
| Input voltage range | 220 - 240 V AC |
| Frequency | 60 - 50 Hz |
| CCT / Tone | 3000 K |
| Colour rendering index | 80 Ra |
| C.C. / C.V. | AC |
| Safety class | 2 |
| IP | IP65 |
| IK | IK10 |
| Glow wire test | 650° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Driver included | Driver |
| Dimmable article | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | Yes |
| Electric socket | Type F |
| Cable length | 5 m |
| Resin potting | No |
| Type of light emission | Double emission |
| Net weight | 7.940 Kg |
| Electrostatic discharge protection | No |
| Surge protection | No |

| Finishing diffuser | |
|--------------------|---------|
| Material | PE |
| Colour | neutral |

| Finishing mounting frame | |
|--------------------------|-------|
| Material | PC |
| Colour | white |

The driver contained in the device complies with IEC 61347-2-13 annex J, and can therefore be powered by centralized power systems.

Oh!_FL65 LED



Floor Lamp | 220-240 V | 1 topLED 26 W DC - 27 W AC | CRI 80 | Base 16193


Double emission floor lamp for outdoor application. The warm white LED light source with a diffused light distribution is composed of 1 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 3835 lm, with a 147.5 lm/W nominal luminous efficacy.

The diffuser is made of pe; the mounting frame is made of PC, with a white finish. The ingress protection degree is IP65; the total weight is of 7.940 kg.

The total absorbed power is 27 W. The power supply cable is included and features a 5 m length.

The device features protection class II and can be floor-mounted with an outer casing, code 14930(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

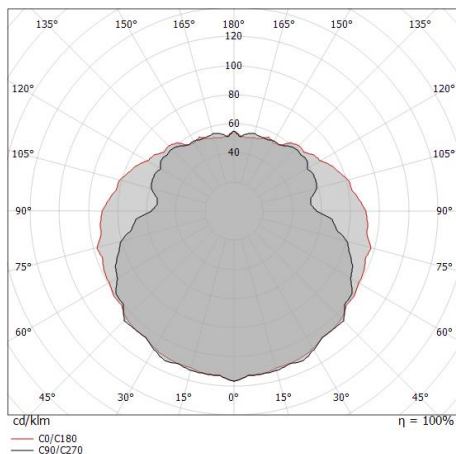

Energy efficiency class

This product contains a light source of energy efficiency class F. This product contains 6 light sources of energy efficiency class D.

Illuminotechnical Features

| | |
|---|----------------|
| Light Output Ratio (LOR) | 74 % |
| Source lumens | 3835 lm |
| Delivered lumens | 2856 lm |
| Consumption | 27 W |
| Luminaire efficacy | 105 lm/W |
| Colour temperature | 3000 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Colour rendering index | 80 Ra |
| Junction temperature (lighting fixture) | 80 |

Standard Operating Ambient Temperature -20 / +50°C

LED Life / Failure Ratio

L80 B20 C0 72500h

UGR


| | |
|-------------------|----------|
| UGR axial | 14.4 |
| UGR transversal | 15.5 |
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

OPTICAL

| | |
|-----------------------------|-------------|
| C0/C180 optics | 178° |
| Light distribution symmetry | Symmetrical |




Oh!_FL65 LED | Floor Lamp | Accessories
16193




Outer casing - outer casing for installation on ground or on concrete

Code
14930




Picket - peg for ground mounting

Code
14937



anti-theft - anti-theft ground fixing bracket

Code
14082



Fixing tie rods

Code
53890



Connector

Code
14992