




Wall Lights | 1 x powerLED 1 W DC 350 mA | CRI 90
60910W00



170

Technical data	
Construction year	2013
Type	Encasement without flange - -
Installation position	Wall lights - Wall lights - Ceiling - Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	powerLED
Optics	Diffused
Light emission direction	downward
Nominal power	1 W DC
Source lumens	126 lm
Input voltage range	350mA
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	0.79 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	plaster
Colour	white

Finishing diffuser

Material	PMMA
Colour	transparent

Electronics

	99115 1-10V - N/O button Multi Power 198-264V AC / 180-275V DC (1 art.)
	89144 On/Off Driver 198-264V AC / 180-275V DC (1 art.)
	89145 On/Off Driver 198-264V AC / 180-275V DC (1 art.)
	99344 DALI - Push and Simply Dim Multi Power 198-264V AC / 176-275V DC (1 art.)

Wall Lights | 1 x powerLED 1 W DC 350 mA | CRI 90 | Base
60910W00

Single emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 1 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 126 lm, with a 126.0 lm/W nominal luminous efficacy.

The device body is made of plaster and features a white finish; the diffuser is made of pmma. The ingress protection degree is IP20; the total weight is of 0.79 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1 W.

The device features protection class III and can be wall lights, wall lights, ceiling or ceiling-mounted, with a 170 x 170 mm hole (in plasterboard) with an outer casing, code 61260(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class E.


Illuminotechnical Features

Light Output Ratio (LOR)	53 %
Source lumens	126 lm
Delivered lumens	67 lm
Consumption	2,0 W
Luminaire efficacy	33 lm/W
Colour temperature	3000 K
Colour rendering index	90 Ra

Standard Operating Ambient Temperature -20 / +50°C



LED Life / Failure Ratio

L80 B20 C0 80000h

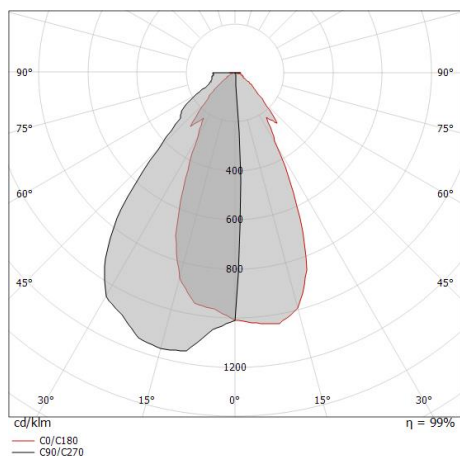



Gypsum_WRX | Step Lights | Accessories
60910W00



Outer casing - formwork for concrete / cement

Type of installation: masonry L=230mm, H=232mm, D=51mm.


Material:Iron, colour:zinc, processing:Galvanising.

Finish

Grey

Code

61260



Spacer - KIT thicknesses for installation on plasterboard

Code

60830