





Bollard & Pole | topLED 0 W DC - 21 W AC
CRI 80
63446N00

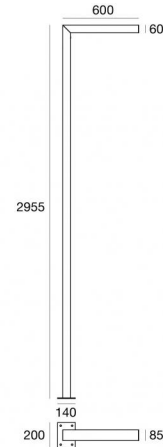

Technical data	
Type	Pole
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward
Nominal power	0 W DC
Total Power	21 W
Nominal input voltage	220 - 240 V AC
Input voltage range	180 - 264 V AC
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP65
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	14,2 Kg
Electrostatic discharge protection	Yes
Surge protection	3 KV
Optics technology	Dot free

Finishing casing	
Material	Aluminium 6060
Colour	Dark brown
Processing	Open pore anodizing + Powder Coating
Finishing diffuser	
Material	UV Resistant Polycarbonate
Colour	opaline



Fixing tie rods

Code

53890