


Gypsum Cell



Downlights | 3 x powerLEDs 6 W DC 630 mA | CRI 80
64546N15

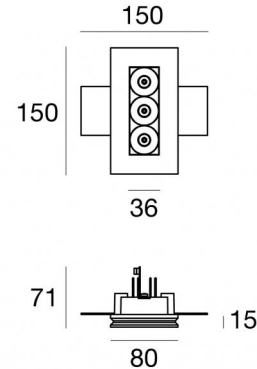

160 x
90

Technical data	
Type	Encasement without flange
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	powerLEDs
Optics	Spot
Light emission direction	downward
Nominal power	6 W DC
Source lumens	711 lm
Input voltage range	630mA
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.170 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.500 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	TVS

Finishing casing

Material	plaster
Colour	white


Finishing diffuser


Material	Polyamide
Colour	black


Finishing radiator


Material	Aluminium 6060
Colour	Anodised Black
Processing	15 µm Anodizing

Electronics

 99115
1-10V - N/O button Multi Power 198~264V AC / 180~275V DC (1 - 3 art.)

 99105
On/Off Driver 198~264V AC (2 - 4 art.)

 99376
On/Off Driver 198~264V AC (1 - 2 art.)

 C-E100001
Push and Simply Dim - DALI-2 Multi Power 198~264V AC / 180~275V DC (2 - 4 art.)

Cables Electrification

Cable connector	No
-----------------	----

Downlights | 3 x powerLEDs 6 W DC 630 mA | CRI 80 | Base
64546N15


Single emission recessed downlights for indoor application. The natural white LED light source with a spot light distribution is composed of 3 powered LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 711 lm, with a 118.5 lm/W nominal luminous efficacy.

The device body is made of plaster and features a white finish; the diffuser is made of polyamide. The ingress protection degree is IP20; the total weight is of 0.500 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 6 W. The power supply cable is included and features a 0.170 m length.

The device features protection class III and can be ceiling-mounted, with a 160 x 90 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

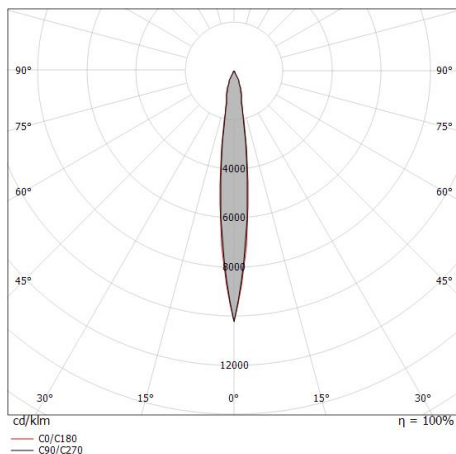

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.11 0.11	E(0°) 19120 E(C90) 6.0° 9458 E(C0) 6.4° 9458
1.0	0.21 0.22	E(0°) 4780 E(C90) 6.0° 2364 E(C0) 6.4° 2364
1.5	0.32 0.34	E(0°) 2124 E(C90) 6.0° 1051 E(C0) 6.4° 1051
2.0	0.42 0.45	E(0°) 1195 E(C90) 6.0° 591 E(C0) 6.4° 591
2.5	0.53 0.56	E(0°) 765 E(C90) 6.0° 378 E(C0) 6.4° 378
3.0	0.63 0.67	E(0°) 531 E(C90) 6.0° 263 E(C0) 6.4° 263

— C0/C180 (Half-peak divergence: 12.8°)
— C90/C270 (Half-peak divergence: 12.0°)

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	65 %
Source lumens	711 lm
Delivered lumens	468 lm
Consumption	6 W
Luminaire efficacy	78 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra

Standard Operating Ambient Temperature -20 / +50°C

Ordinary temperature on the glass 40°C

LED Life / Failure Ratio

L70 B20 C0 214455h (at Tj 60 Ta 25)

UGR

UGR axial	7.4
UGR transversal	8.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	12°
Light distribution simmetry	Symmetrical



Spacer - KIT thicknesses for installation on plasterboard

Code

60830