



# Dirigo\_M2 Aluminium IN-corner

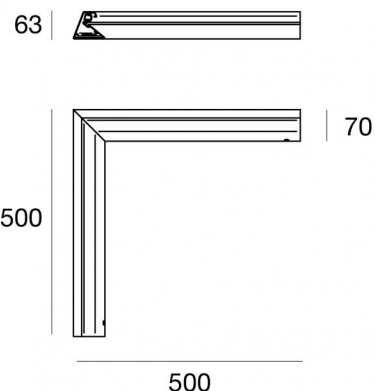

Lines | Modular  
64666

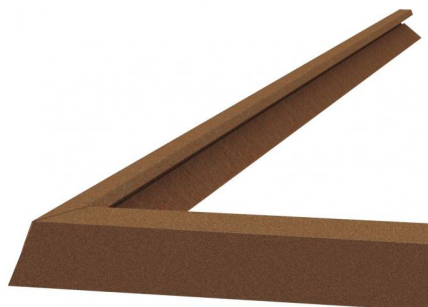

Technical data	
Designer	Studio RIGO
Construction year	2017
Type	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
IK	IK09
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	No
Resin potting	No
Net weight	1.7 Kg
Modularity	Modular

Finishing casing	
Material	Aluminium 6060
Colour	Dark brown
Processing	Open pore anodizing + Powder Coating

Finishing diffuser	
Material	UV Resistant Polymethylmethacrylate
Colour	opaline



Lines | Modular  
**64666**

## Components



Silicone\_C 120 LEDs/m

**Code**

62403




Silicone\_C 120 LEDs/m - LED Strip | topLED 72 W DC 24 V |  
14.4 W/m | 1435 Lm/m

**Code**

62403N




Dirigo\_M2 Aluminium IN-corner | Lines | Accessories  
**64666**



Closing cap  
Material:Aluminium 6060, colour:Dark brown, processing:Open pore anodizing + Powder Coating.

**Code**  
64589



Junction  
Type linear.  
Material:Aluminium 6060, colour:Dark brown, processing:Open pore anodizing + Powder Coating.

**Code**  
64662