


Systems - Lines | Modular 65024





chnical data	

Technical data	
Туре	
Installation position	Ceiling
Installation environment	Indoor
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	1.7 Kg
Modularity	Modula




Finishing casing	
Material	Aluminium
Colour	Chalk white
Processing	Coating



Systems - Lines | Modular **65024**


Components

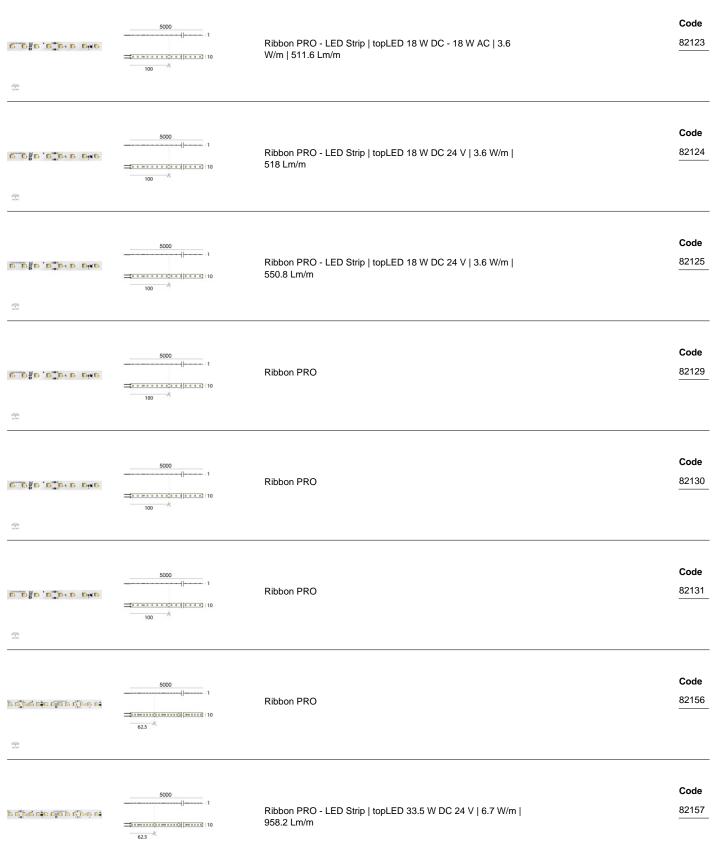



Systems - Lines | Modular **65024**


Components

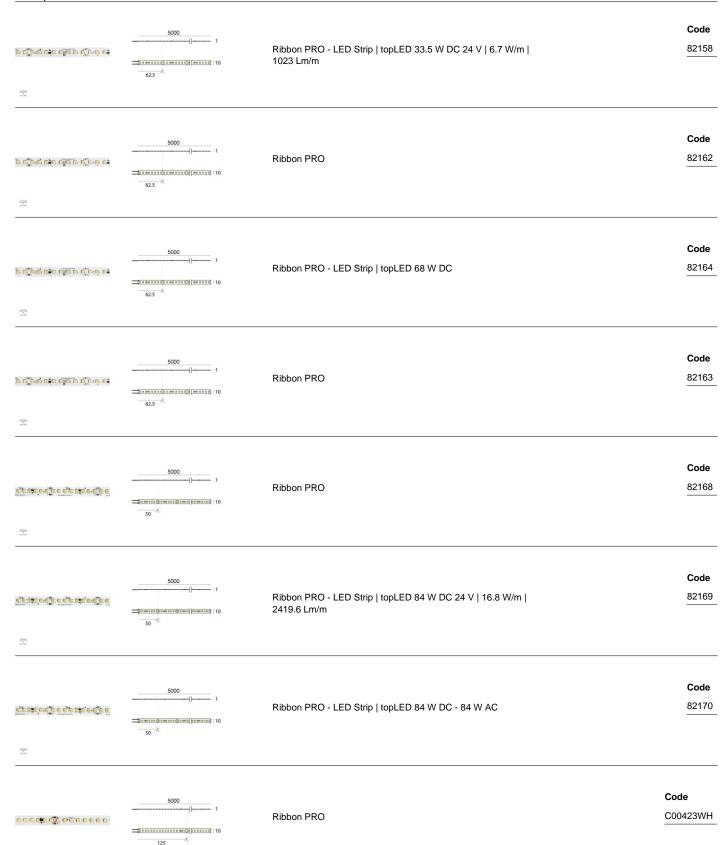



Systems - Lines | Modular **65024**

<u> </u>				
Co	rm	m	rı⇔	ms

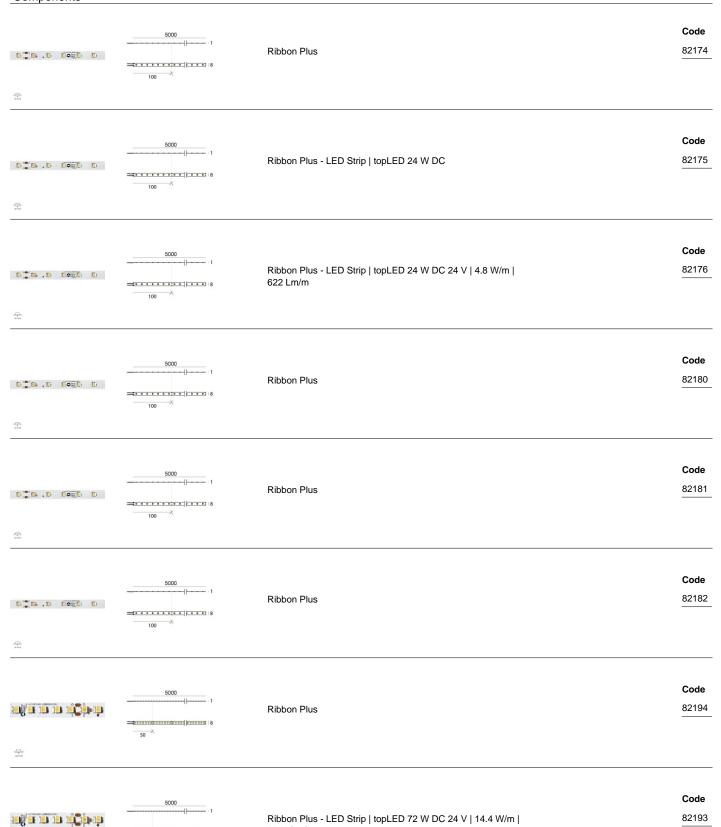

50 ×




C00419WHSDI

Systems - Lines | Modular **65024**

Components

m m mile for freeheen m

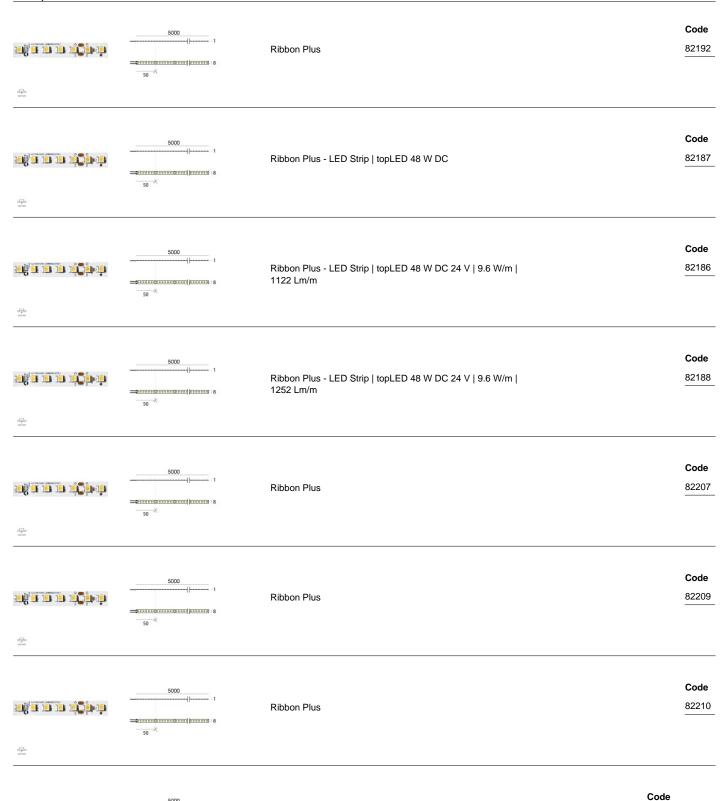


Ribbon Plus WT - LED Strip | topLED 65 W DC 24 V | 13 W/m



Systems - Lines | Modular 65024

Components

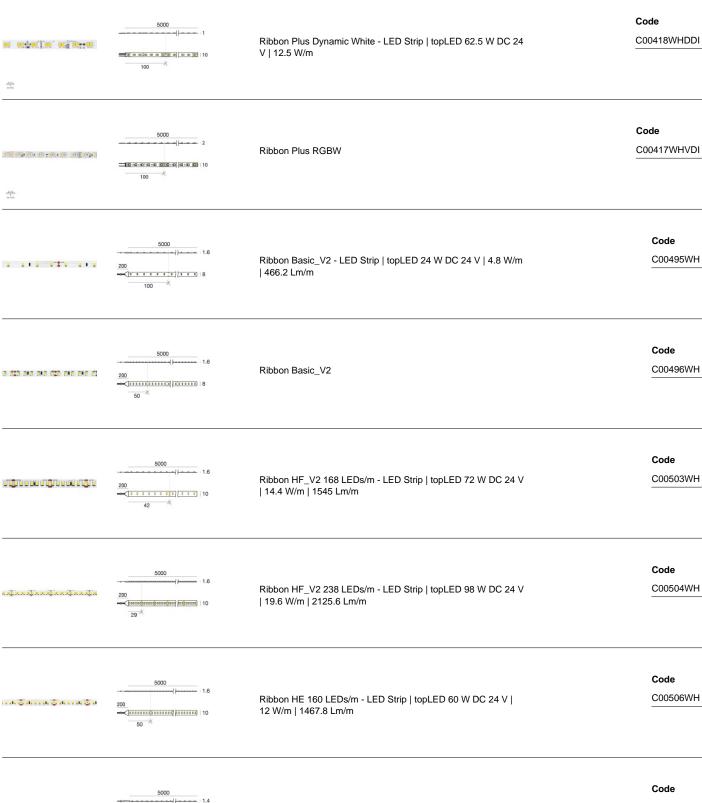





Ribbon HE 160 LEDs/m - LED Strip | topLED 108 W DC 24 V | 21.6 W/m | 2767.6 Lm/m

C00507WH



Systems - Lines | Modular **65024**

Components





Fylo+ Surface_4 | Lines | Accessories **65024**

320 100	Outer casing installation position: ceiling L=320mm, H=55mm, D=100mm	Code 62900
19 1000	Diffuser	Code 65054
19 1000 11	Diffuser	Code 65055
2 90	Closing cap Material:Aluminium, colour:Chalk white, processing:Coating.	Code 65097