



Uplights | 1 arrayLED 12 W AC 200-264 V AC  
CRI 80  
76082W60



Ø138

Technical data	
Type	Walk Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Wide Flood
Light emission direction	internal
Nominal power	12 W AC
Source lumens	1267 lm
Input voltage range	200-264V
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP67
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	2000 Kg
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.9 Kg
Electrostatic discharge protection	No
Surge protection	1.5 KV
Product technological characteristics	Acquastop

#### Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	black
Processing	Open pore anodizing + Powder Coating

#### Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

#### Finishing flange

Material	AISI 316L steel
Colour	steel
Processing	Brushing

#### Cables Electrification

Cable connector	No
-----------------	----

## Uplights | 1 arrayLED 12 W AC 200-264 V AC | CRI 80 | Base 76082W60

Single emission uplights for outdoor application. The warm white LED light source with a wide flood light distribution is composed of 1 arrayed LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1267 lm, with a 105.6 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 0.9 kg.

The total absorbed power is 12 W. The power supply cable is included and features a 1 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 99652(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class E.

### Illuminotechnical Features


Light Output Ratio (LOR)	67 %
Source lumens	1267 lm
Delivered lumens	859 lm
Consumption	12 W
Luminaire efficacy	71 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### UGR

UGR axial	16.1
UGR transversal	16.2
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20


### OPTICAL

C0/C180 optics	53°
Light distribution simmetry	Symmetrical

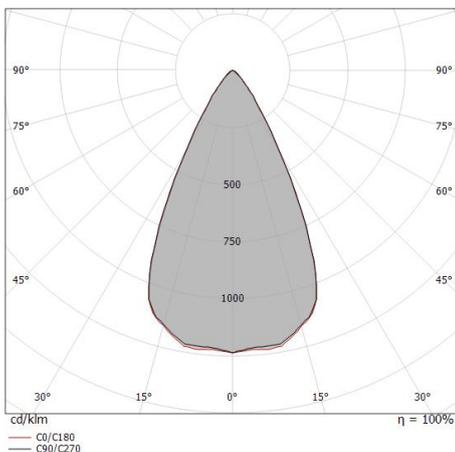

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.51 0.50	E(0°) 4245 E(C90) 26.8° 1516 E(C0) 26.7° 1526
1.0	1.01 1.01	E(0°) 1061 E(C90) 26.8° 379 E(C0) 26.7° 382
1.5	1.52 1.51	E(0°) 472 E(C90) 26.8° 168 E(C0) 26.7° 170
2.0	2.02 2.01	E(0°) 265 E(C90) 26.8° 95 E(C0) 26.7° 95
2.5	2.53 2.51	E(0°) 170 E(C90) 26.8° 61 E(C0) 26.7° 61
3.0	3.03 3.02	E(0°) 118 E(C90) 26.8° 42 E(C0) 26.7° 42

— C0/C180 (Half-peak divergence: 53.4°)  
— C90/C270 (Half-peak divergence: 53.6°)



**Outer casing**

installation position: floor, land; type of installation: masonry L=154mm, H=76mm,  
D=154mm.

Material:ABS Plastic, colour:black.

**Code**

99652