



Wall Lights | 198-264 V
1 arrayLED 9.3 W DC - 11 W AC | CRI 80



76321W15



Technical data	
Type	Surface
Installation position	Wall lights
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Spot
Light emission direction	downward
Nominal power	9.3 W DC
Total Power	11 W
Source lumens	1320 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP65
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	1.47 Kg
Electrostatic discharge protection	Yes
Surge protection	1 KV

Finishing casing	
Material	Die-cast Aluminium EN AB - 46100
Colour	White
Processing	Open pore anodizing + Powder Coating
Finishing diffuser	
Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening



Wall Lights | 198-264 V | 1 arrayLED 9.3 W DC - 11 W AC | CRI 80 | Base
76321W15

Single emission wall lights for outdoor application. The warm white LED light source with a spot light distribution is composed of 1 arrayed LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1320 lm, with a 141.9 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a white finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP65; the total weight is of 1.47 kg.

The total absorbed power is 11 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	65 %
Source lumens	1320 lm
Delivered lumens	867 lm
Consumption	11 W
Luminaire efficacy	78 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio


L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR

UGR axial	13.3
UGR transversal	15.1
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	15°
Light distribution simmetry	Symmetrical

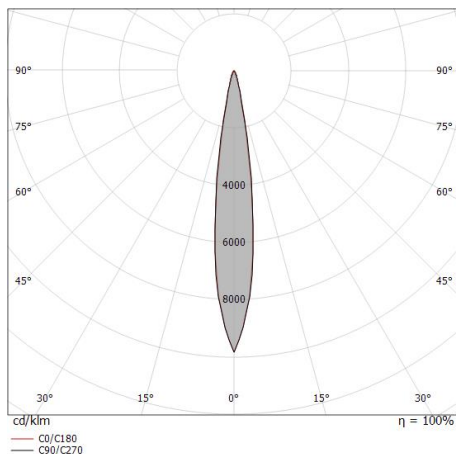

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.13 0.13	E(0°) 34044 E(C90) 7.6° 16802 E(C0) 7.5° 16868
1.0	0.27 0.26	E(0°) 8511 E(C90) 7.6° 4201 E(C0) 7.5° 4217
1.5	0.40 0.39	E(0°) 3783 E(C90) 7.6° 1867 E(C0) 7.5° 1874
2.0	0.53 0.53	E(0°) 2128 E(C90) 7.6° 1050 E(C0) 7.5° 1054
2.5	0.67 0.66	E(0°) 1362 E(C90) 7.6° 672 E(C0) 7.5° 675
3.0	0.80 0.79	E(0°) 946 E(C90) 7.6° 467 E(C0) 7.5° 469

— C0/C180 (Half-peak divergence: 15.0°)
— C90/C270 (Half-peak divergence: 15.2°)