




Wall Lights | 198-264 V AC /200-300 V DC
 4 x powerLEDs - 1 arrayLED 12.6 W DC - 15 W AC | CRI 80
76368N30



Technical data	
Type	Surface
Installation position	Wall lights
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLEDs + arrayLED
Optics	Ultra Spot + Medium Flood
Light emission direction	downward + upward
Nominal power	12.6 W DC
Total Power	15 W
Source lumens	1959 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP65
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI-2 - PUSH DIM
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Net weight	1.53 Kg
Electrostatic discharge protection	Yes
Surge protection	1 KV

Finishing casing	
Material	Die-cast Aluminium EN AB - 46100
Colour	Grey
Processing	Open pore anodizing + Powder Coating
Finishing diffuser	
Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening



Wall Lights | 198-264 V AC /200-300 V DC | 4 x powerLEDs - 1 arrayLED 12.6 W DC - 15 W
 AC | CRI 80 | Base
76368N30


Double emission wall lights for outdoor application. The natural white LED light source with a ultra spot light distribution is composed of 4 powerled LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 969 lm, with a 153.8 lm/W nominal luminous efficacy The natural white LED light source with a flood light distribution is composed of 1 arrayled LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 990 lm, with a 157.1 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a grey finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP65; the total weight is of 1.53 kg.

The total absorbed power is 15 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

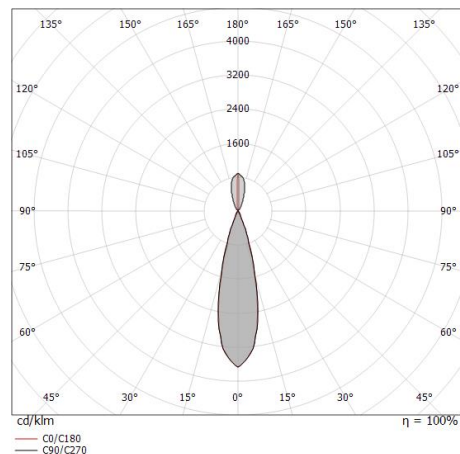

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.24 0.24	E(0°) 10798 E(C90) 13.5° 5022 E(C0) 13.4° 5015
1.0	0.48 0.48	E(0°) 2700 E(C90) 13.5° 1255 E(C0) 13.4° 1254
1.5	0.72 0.71	E(0°) 1200 E(C90) 13.5° 558 E(C0) 13.4° 557
2.0	0.96 0.95	E(0°) 675 E(C90) 13.5° 314 E(C0) 13.4° 313
2.5	1.20 1.19	E(0°) 432 E(C90) 13.5° 201 E(C0) 13.4° 201
3.0	1.44 1.43	E(0°) 300 E(C90) 13.5° 139 E(C0) 13.4° 139

Distance [m] Cone diameter [m] illuminance [lx]

— C0/C180 (Half-peak divergence: 26.8°)
 — C90/C270 (Half-peak divergence: 27.0°)

Energy efficiency class

This product contains 2 light sources of energy efficiency class E, E.

Illuminotechnical Features

Light Output Ratio (LOR)	37 %
Source lumens	1959 lm
Delivered lumens	735 lm
Consumption	15 W
Luminaire efficacy	49 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR

UGR axial	11.8
UGR transversal	13.3
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	27°
Light distribution simmetry	Symmetrical