


Wall Lights | 2 arrayLED 20 W AC 200-264 V AC | CRI 80
76579W60



Technical data	
Type	Surface
Installation position	Wall lights
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Double Wide Flood
Light emission direction	downward and upward
Nominal power	20 W AC
Source lumens	2300 lm
Input voltage range	200-264V
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP65
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Net weight	1.5 Kg
Electrostatic discharge protection	No
Surge protection	1.5 KV

Finishing casing	
Material	Die-cast Aluminium EN AB - 46100
Colour	White
Processing	Open pore anodizing + Powder Coating

Finishing diffuser	
Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

Wall Lights | 2 arrayLED 20 W AC 200-264 V AC | CRI 80 | Base 76579W60

Double emission wall lights for outdoor application. The warm white LED light source with a double wide flood light distribution is composed of 2 arrayed LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 2300 lm, with a 115.0 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a white finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP65; the total weight is of 1.5 kg.

The total absorbed power is 20 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains 2 light sources of energy efficiency class E.

Illuminotechnical Features


Light Output Ratio (LOR)	54 %
Source lumens	2300 lm
Delivered lumens	1260 lm
Consumption	20 W
Luminaire efficacy	63 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

UGR

UGR axial	12.3
UGR transversal	12.3
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	47°
Light distribution simmetry	Symmetrical

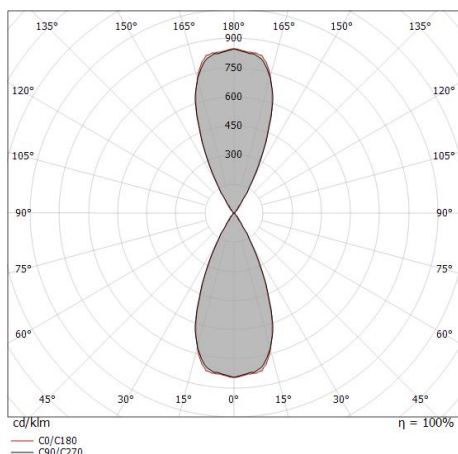

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.43 0.43	E(0°) 4269 E(C90) 23.5° 1657 E(C0) 23.3° 1657
1.0	0.87 0.86	E(0°) 1067 E(C90) 23.5° 414 E(C0) 23.3° 414
1.5	1.30 1.29	E(0°) 474 E(C90) 23.5° 184 E(C0) 23.3° 184
2.0	1.74 1.72	E(0°) 267 E(C90) 23.5° 104 E(C0) 23.3° 104
2.5	2.17 2.15	E(0°) 171 E(C90) 23.5° 66 E(C0) 23.3° 66
3.0	2.61 2.58	E(0°) 119 E(C90) 23.5° 46 E(C0) 23.3° 46

— C0/C180 (Half-peak divergence: 46.6°)
— C90/C270 (Half-peak divergence: 47.0°)