

Buzzer



Bollard & Pole | arrayLED 0 W AC 200-264 V AC

CRI 80


76895N00



360° light



180° light

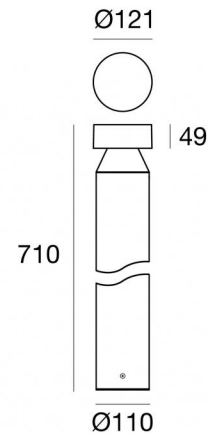

Technical data	
Type	Bollard
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Asymmetric 360°
Light emission direction	downward
Nominal power	0 W AC
Input voltage range	200-264V
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP65
IK	IK09
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	Yes
Type of light emission	Radial diffusion
Net weight	1.9 Kg
Electrostatic discharge protection	No
Surge protection	1.5 KV

Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	Grey
Processing	Open pore anodizing + Powder Coating

Finishing diffuser


Material	UV Resistant Polycarbonate
Colour	transparent

Finishing base

Material	PC
Colour	black



Buzzer | Bollard & Pole | Accessories
76895N00



Picket - Stainless steel bolts with positioning template
Cover material: steel

Code

W-F900001