Projectors | 176-264 V | 1 arrayLED 16 W DC - 18 W AC | CRI 90 77053M15





	158	33
45 142	360°	
	Ø66	70

Technical data	
Туре	Track
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	arrayLED
Optics	Spot
Light emission direction	frontal
Nominal power	16 W DC
Total Power	18 W
Source lumens	2457 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	176 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	Swivelling
total angle (vertical plane)	90 °
total angle (horizontal plane)	360 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	0.412 Kg
Electrostatic discharge protection	Yes
Surge protection	2 KV

Finishing casing	3
Material	Die-cast Aluminium EN AB - 46100
Colour	Black
Processing	Powder coating

Projectors | 176-264 V | 1 arrayLED 16 W DC - 18 W AC | CRI 90 | Base 77053M15


Single emission projectors for indoor application. The super warm white LED light source with a spot light distribution is composed of 1 arrayled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 2457 lm, with a 153.6 lm/W nominal luminous efficacy.


The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of powder coating. The ingress protection degree is IP20; the total weight is of 0.412 kg.

The total absorbed power is 18 W.

The device features protection class II and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

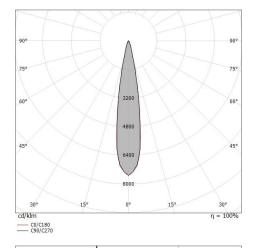



C0/C180 (Half-peak divergence: 18.2°) C90/C270 (Half-peak divergence: 18.4°)

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features	
Light Output Ratio (LOR)	68 %
Source lumens	2457 lm
Delivered lumens	1689 lm
Consumption	18 W
Luminaire efficacy	93 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	90 Ra
Colour Rendering Index	60 R9
Black Body Locus	On
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio


L70 B10 C0 252000h (at Tj 65 Ta 25)


UGR	
UGR axial	17.8
UGR transversal	17.9
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	18°
Light distribution simmetry	Symmetrical

COLOR VECTOR GRAPHIC



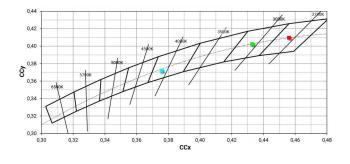

Optus_T | Projectors | Accessories 77053M15

and a state of	8 31 148	Power supply - White Right power supply header (9001/W) Material:PC, colour:white.	Code 81033
train of	8 1 148	Power supply - White left power supply header (9002/W) Material:PC, colour:white.	Code 81036
	95 95 31 145	Power supply - Black left power supply header (9002/B) Material:PC, colour:black.	Code 81037
	95 97 31 149	Power supply - Black Right power supply header (9001/B) Material:PC, colour:black.	Code 81034
sruccal		Closing cap - White end cap 9004/W Material:PC, colour:white.	Code 80999
		Closing cap - Black end cap 9004/B Material:PC, colour:black.	Code 81000
STUCCHI		Closing cap - Recessed white end cap 9004-R/W Material:PC, colour:white.	Code 81002
		Closing cap - Recessed black end cap 9004-R/B Material:PC, colour:black.	Code 81003
	Lines Light Crown reserves the right with		

3/13 22.12.2024

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

linealight.com

Optus_T | Projectors | Accessories 77053M15

0	3 9145	Closing cap - White gasket (S-9001/115-W) Material:white.		Code 81084
0	3	Closing cap - Black gasket (S-9001/115-B) Material:black, colour:black.		Code 81085
		Ceiling rose - 1.5m white pendant luminaires kit + bracket (9000-KIT5-1,5-W) Material:plastic, colour:white.		Code 81012
		Ceiling rose - 1.5m black pendant luminaires kit + bracket ((9000-KIT5-1,5-B) Material:plastic, colour:black.		Code 81014
		Ceiling rose - 5m white pendant luminaires kit + bracket (9000-KIT5-5-W) Material:plastic, colour:white.		Code 81013
	A. A.	Ceiling rose - 5m black pendant luminaires kit + bracket (9000-KIT5-5-B) Material:plastic, colour:black.		Code 8101
		Bracket - Anodized fixing bracket (S-9000/131) L=35mm, H=14mm, D=24mm. Material:Aluminium, colour:translucent.	Finish Anod. Al.	Code 81086
· · ·	E 5 24 180 R	Bracket - Anodized stiffening bracket (S-9000/333) L=180mm, H=24mm, D=26mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.	Finish	Code 81024

4/13 22.12.2024

product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

linealight.com

Optus_T | Projectors | Accessories 77053M15

· · ·	24 180 S	Bracket - White stiffening bracket (S-9000/333-W) L=180mm, H=24mm, D=20mm. Material:Aluminium, colour:white RAL 9010, processing:Coating.	Finish White	Code 81025
R. S. R.	비 24 (180 (180 (180 (180 (180 (180 (180)(180)(180)(180)(180)(180)(180)(180)	Bracket - Black stiffening bracket (S-9000/333-B) L=180mm, H=24mm, D=20mm. Material:Aluminium, colour:black RAL 9005, processing:Coating.	Finish Black	Code 81026
	2 ([]]) 24 40	Bracket - White fixing braket (S-9000/131-W) L=35mm, H=14mm, D=24mm. Material:Aluminium, colour:white, processing:Coating.	Finish White	Code 81087
1	z []	Bracket - Black fixing braket (S-9000/131-B) L=35mm, H=14mm, D=24mm. Material:Aluminium, colour:Black, processing:Coating.	Finish Black	Code 81088
		Junction - White electrical junction - internal (9003/W) Type linear. Material:PC, colour:white.	Finish White	Code 81039
		Junction - Black electrical junction - internal (9003/B) Type linear. Material:PC, colour:black.	Finish Black	Code 81040
Land Land	I Constant O within O Constant I	Junction - White power supply junction - central (9010/W) Type linear. Material:PC, colour:white.	Finish White	Code 81042
		Junction - White L junction - internal (9011/W) Type linear. Material:PC, colour:white.	Finish White	Code 81045

Optus_T | Projectors | Accessories 77053M15

	Junction - Flexible white junction (9018/W) Type flexible curve. Material:PC, colour:white. Junction - White X junction (9017/W) Type linear. Material:PC, colour:white. Junction - Left white T junction - external (9013/W) Type linear	Finish White Finish White	Code 81066 Code 81063
	Type linear. Material:PC, colour:white. Junction - Left white T junction - external (9013/W)	White	
		Finich	
	Type linear. Material:PC, colour:white.	Finish White	Code 81051
	Junction - Right white T junction - external (9014/W) Type linear. Material:PC, colour:white.	Finish White	Code 81054
	Junction - Left white T junction - internal (9015/W) Type linear. Material:PC, colour:white.	Finish White	Code 81057
	Junction - Right White T junction - internal (9016/W) Type linear. Material:PC, colour:white.	Finish White	Code 81060
T Concept of a reffice 0 process of	Junction - Black power supply junction - centrale (9010/B) Type linear.	Finish Black	Code 81043

Optus_T | Projectors | Accessories 77053M15

	Junction - Black L junction - internal (9011/B) Type linear. Material:PC, colour:black.	Finish Black	Code 81046
	Junction - Black L junction - external (9012/B) Type linear. Material:PC, colour:black.	Finish Black	Code 81049
	Junction - Flexible black junction (9018/B) Type flexible curve. Material:PC, colour:black.	Finish Black	Code 81067
	Junction - Black X junction (9017/B) Type linear. Material:PC, colour:black.	Finish Black	Code 81064
254 • • • • • • • • • • • • • • • • • • •	Junction - Black left T junction - external (9013/B) Type linear. Material:PC, colour:black.	Finish Black	Code 81052
254 • • • • • • • • • •	Junction - Right black T junction - external (9014/B) Type linear. Material:PC, colour:black.	Finish Black	Code 81055
254 • • • • • • • • • • • • • • • • • • •	Junction - Left black T junction - internal (9015/B) Type linear. Material:PC, colour:black.	Finish Black	Code 81058
254 • • • orthon 0 149	Junction - Right black T junction - internal (9016/B) Type linear. Material:PC, colour:black.	Finish Black	Code 81061
 Linea Light Group reserves the right with	out any advance notice, to change the characteristics of their products, as well as the availability of the sam	ne at any time. No	

Optus_T | Projectors | Accessories 77053M15

	Suspensions - 1.5m white pendant luminaires kit (9000-KIT3-1,5-W) Material:plastic, colour:white.	Code 81006
	Suspensions - 5m white pendant luminaires kit (9000-KIT3-5-W) Material:plastic, colour:white.	Code 81007
150	Suspensions - 1.5m black pendant luminaires kit (9000-KIT3-1,5-B) Material:plastic, colour:black.	Code 81008
000	Suspensions - 5m black pendant luminaires kit (9000-KIT3-5-B) Material:plastic, colour:black.	Code 81009
	Suspensions - White rigid suspension clip (S-9000-P2-W) Material:plastic, colour:white.	Code 81018
	Suspensions - Black rigid suspension clip (S-9000-P2-B) Material:plastic, colour:black.	Code 81019
	Suspensions - White rigid suspension 1m (S-9000-P3-W) Material:plastic, colour:white.	Code 81021
	Suspensions - Black rigid suspension 1m (S-9000-P3-B) Material:plastic, colour:black.	Code 81022

8/13 22.12.2024

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

linealight.com

Optus_T | Projectors | Accessories 77053M15

		Cable cover - White recessed cover (S-9001-R/6-W) Material:PC, colour:white.	Code 81069
		Cable cover - White cover for recessed junction (S-9010-R/6-W) Material:PC, colour:white.	Code 81072
		Cable cover - White cover for recessed L junction (S-9011-R/6-W) Material:PC, colour:white.	Code 81075
	+	Cable cover - White cover for recessed T junction (S-9013-R/6-W) Material:PC, colour:white.	Code 81078
		Cable cover - White cover for recessed X junction (S-9017-R/6-W) Material:PC, colour:white.	Code 81081
		Cable cover - Black recessed cover (S-9001-R/6-B) Material:PC, colour:black.	Code 81070
	•	Cable cover - Black cover for recessed junction (S-9010-R/6-B) Material:PC, colour:black.	Code 81073
		Cable cover Material:PC, colour:black.	Code 81076
9/13 22.12.2024	Linea Light Group reserves the right, wi	Material:PC, colour:black.	lin

product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories 77053M15

		Cable cover - Black cover for recessed T junction (S-9013-R/6-B) Material:PC, colour:black.	Code 81075
	0 million 0	Cable cover - Black cover for recessed X junction (S-9017-R/6-B) Material:PC, colour:black.	Code 81082
		Cable cover Material:white.	Code 8324
		Cable cover Material:black, colour:black.	Code 83250
		White three-phase/DALI adapter (9009/W)	Code 81094
- 5 00		White three-phase adapter (9009-4/W)	Code 8109
		Black three-phase/DALI adapter (9009/B)	Code 8109
		Black trhee-phase adapter (9009-4/B)	Code 81093
10/13 22.12.2024	Linea Light Group reserves the right, with product, relative technical data, illustratic	out any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. ons and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and Il values indicated are measured values. There is a +/ 10% tolerance for the flow, CCT and power data.	linealight on

translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories 77053M15

	Tool - Cutter S-9000/T		Code 81005
314 () () () () () () () () () ()	Track - Three-phase Recessed White DALI Track, 1 m (9000-1/W-R) Length: 1000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating.	Finish White	Code 80990
314 (1) (1) (1) (1) (1) (1) (1) (1)	Track - Three-phase Recessed White DALI Track, 2 m (9000-2/W-R) Length: 2000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating.	Finish White	Code 80991
State State	Track - Trhee-phase Recessed White DALI Track, 3 m (9000-3/W-R) Length: 3000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating.	Finish White	Code 80992
338 338 (0,0) (0,0	Track - Three-phase Recessed Grey DALI Track, 1 m (9000-1/B-R) Length: 1000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating.	Finish Black	Code 80993
814 () () () () () () () () () ()	Track - Three-phase Recessed Black DALI Track, 2 m (9000-1/B-R) Length: 2000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating.	Finish Black	Code 80994
Street St	Track - Three-phase Recessed Black DALI Track, 3 m (9000-3/B-R) Length: 3000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating.	Finish Black	Code 80995
37.8 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Track Length: 1000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating.	Finish White	Code 83336

11/13 22.12.2024

Optus_T | Projectors | Accessories 77053M15

	37.8 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Track Length: 2000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating.	Finish White	Code 83337
	37.8 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Track Length: 3000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating.	Finish White	Code 83338
	37.8 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Track Length: 1000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating.	Finish Black	Code 83339
	37.8 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Track Length: 2000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating.	Finish Black	Code 83340
	37.8 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Track Length: 3000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating.	Finish Black	Code 83341
	0055.5	Anti-glare - Accessory for focal kit with code 83347. Anti-glare Type: honeycomb louvre. Material:Pom-C, colour:Black.		Code 99841
0		Anti-glare Anti-glare Type: elliptical filter. Material:Pom-C, colour:Black.		Code 83345
S		Anti-glare Anti-glare Type: cross louvres. Material:Pom-C, colour:Black.		Code 83344

Optus_T | Projectors | Accessories 77053M15

Anti-glare Anti-glare Type: 45° cylindrical screen. Material:Pom-C, colour:Black.	Code 83343
Anti-glare Anti-glare Type: honeycomb louvre. Material:Pom-C, colour:Black.	Code 83346
Anti-glare Anti-glare Type: cylindrical screen. Material:Pom-C, colour:Black.	Code 83342
Optics Light distribution: spot,Cover material: uv resistant polycarbonate	Code 83348
Optics Light distribution: medium flood,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate	Code 83349
Optics Light distribution: adjustable,Cover material: ,aluminium	Code 83347
Optics Light distribution: flood,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate	Code 83350

