
Projectors | 176-264 V AC /176-280 V DC 1 arrayLED 16 W DC - 18 W AC | CRI 98 **77057W60**





| Technical data | |
|--|----------------------|
| Туре | Track |
| Installation position | Ceiling |
| Installation environment | Indoor |
| Light Source | LED |
| Circuit structure | arrayLED |
| Optics | Wide Flood |
| Light emission direction | frontal |
| Nominal power | 16 W DC |
| Total Power | 18 W |
| Source lumens | 2263 lm |
| Nominal input voltage | 220 - 240 V AC |
| Input voltage range | 176 - 264 V AC |
| Frequency | 50 - 60 Hz |
| CCT / Tone | 3000 K |
| Colour rendering index | 98 Ra |
| C.C. / C.V. | AC |
| Safety class | 2 |
| IP | IP20 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Driver included | Driver |
| Dimmable article | DALI-2 - PUSH DIM |
| Directional | Swivelling |
| total angle (vertical plane) | 90 ° |
| total angle (horizontal plane) | 360 ° |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |
| Type of light emission | Single emission |
| Net weight | 0.412 Kg |
| Electrostatic discharge protection | Yes |
| Surge protection | 3 KV |
| | |

🖳 [A[🔤 C€ 🕱 🕐 🗆 🖨 🖻 🗋 🙆



| Finishing casin | g |
|-----------------|----------------------------------|
| Material | Die-cast Aluminium EN AB - 46100 |
| Colour | Black |
| Processing | Powder coating |

The driver contained in the device complies with IEC 61347-2-13 annex J, and can therefore be powered by centralized power systems.

Projectors | 176-264 V AC /176-280 V DC | 1 arrayLED 16 W DC - 18 W AC | CRI 98 | Base 77057W60

Single emission projectors for indoor application. The warm white LED light source is composed of 1 arrayled LEDs with CCT of 3000 K and a CRI 98; the source luminous flux is 2263 lm, with a 141.4 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of powder coating. The ingress protection degree is IP20; the total weight is of 0.412 kg.

The total absorbed power is 18 W.

The device features protection class II and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class E.


| Illuminotechnical Features | |
|--|----------------|
| Light Output Ratio (LOR) | 71 % |
| Source lumens | 2263 lm |
| Delivered lumens | 1627 lm |
| Consumption | 18 W |
| Luminaire efficacy | 90 lm/W |
| Colour temperature | 3000 K |
| Standard Deviation of Colour Matching | 2 Step MacAdam |
| Colour rendering index | 98 Ra |
| Black Body Locus | On |
| | |
| Standard Operating Ambient Temperature | -20 / +50°C |
| Ordinary temperature on the glass | 40°C |
| | |


LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25)


| UGR | |
|-------------------|----------|
| UGR axial | 20.1 |
| UGR transversal | 20.1 |
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|-----------------------------|-------------|
| C0/C180 optics | 49° |
| Light distribution simmetry | Symmetrical |

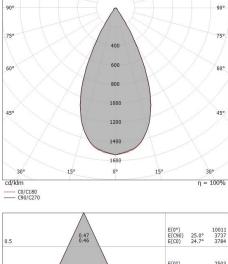




C0/C180 (Half-peak divergence: 49.4°) C90/C270 (Half-peak divergence: 50.0°)



COLOR VECTOR GRAPHIC

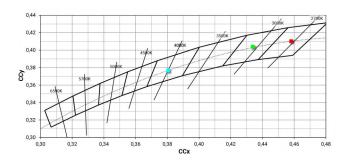

220

Optus_T | Projectors | Accessories 77057W60

8

| Code |
|----------------------|
| Code 81033 |
| |
| |
| |

| and a start | 31 148 | | |
|-------------|----------------|---|----------------------|
| inter o | 8 31 148 | Power supply - White left power supply header (9002/W) Material:PC, colour:white. | Code 81036 |
| | 8 95 31 149 | Power supply - Black left power supply header (9002/B) Material:PC, colour:black. | Code 81037 |
| | 8 31 148 | Power supply - Black Right power supply header (9001/B) Material:PC, colour:black. | Code 81034 |
| erdecal | | Closing cap - White end cap 9004/W Material:PC, colour:white. | Code 80999 |
| | | Closing cap - Black end cap 9004/B Material:PC, colour:black. | Code 81000 |
| STÜCCHI | | Closing cap - Recessed white end cap 9004-R/W Material:PC, colour:white. | Code 81002 |
| | | Closing cap - Recessed black end cap 9004-R/B Material:PC, colour:black. | Code 81003 |
| | | | |

Power supply - White Right power supply header (9001/W)

Material:PC, colour:white.

3/14 21.12.2024

Optus_T | Projectors | Accessories 77057W60

| 0 | 3 | Closing cap - White gasket (S-9001/115-W) Material:white. | | Code 81084 |
|---------|---|---|---------------------|----------------------|
| 0 | 3 3 3 145 2 14 1 145 2 145 1 1 1 1 | Closing cap - Black gasket (S-9001/115-B) Material:black, colour:black. | | Code 81085 |
| | | Ceiling rose - 1.5m white pendant luminaires kit + bracket (9000-KIT5-1,5-W) Material:plastic, colour:white. | | Code 81012 |
| | | Ceiling rose - 1.5m black pendant luminaires kit + bracket ((9000-KIT5-1,5-B) Material:plastic, colour:black. | | Code 81014 |
| | | Ceiling rose - 5m white pendant luminaires kit + bracket (9000-KIT5-5-W) Material:plastic, colour:white. | | Code 81013 |
| | | Ceiling rose - 5m black pendant luminaires kit + bracket (9000-KIT5-5-B) Material:plastic, colour:black. | | Code 81015 |
| | 24 40 | Bracket - Anodized fixing bracket (S-9000/131) L=35mm, H=14mm, D=24mm. Material:Aluminium, colour:translucent. | Finish Anod. Al. | Code 81086 |
| · · · · | ED 24 180 | Bracket - Anodized stiffening bracket (S-9000/333) L=180mm, H=24mm, D=26mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation. | Finish | Code 81024 |

Inter Light Gloup reserves the right, without any advance houce, to change the products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

linealight.com

Optus_T | Projectors | Accessories 77057W60

| · · · | E 189 | Bracket - White stiffening bracket (S-9000/333-W) L=180mm, H=24mm, D=20mm. Material:Aluminium, colour:white RAL 9010, processing:Coating. | Finish Co White 810 | ode 025 |
|--|--|---|-------------------------|--------------------|
| R. M. M. | E 24 180 € 24 180 | Bracket - Black stiffening bracket (S-9000/333-B) L=180mm, H=24mm, D=20mm. Material:Aluminium, colour:black RAL 9005, processing:Coating. | Finish Co Black 810 | ode 026 |
| | 5 [[| Bracket - White fixing braket (S-9000/131-W) L=35mm, H=14mm, D=24mm. Material:Aluminium, colour:white, processing:Coating. | Finish Co White 810 | ode 087 |
| 10/10 | 2 11 0 24 49 | Bracket - Black fixing braket (S-9000/131-B) L=35mm, H=14mm, D=24mm. Material:Aluminium, colour:Black, processing:Coating. | Finish Co Black 810 | o de 088 |
| AN A | R 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 | Junction - White electrical junction - internal (9003/W) Type linear. Material:PC, colour:white. | Finish Co White 810 | ode 039 |
| | R 2 | Junction - Black electrical junction - internal (9003/B) Type linear. Material:PC, colour:black. | Finish Co Black 810 | o de 040 |
| | In and a second a sec | Junction - White power supply junction - central (9010/W) Type linear. Material:PC, colour:white. | | ode 042 |
| | | Junction - White L junction - internal (9011/W) Type linear. Material:PC, colour:white. | Finish Cod White 810 | ode 045 |

5/14 21.12.2024

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.


linealight.com

Optus_T | Projectors | Accessories 77057W60

| | | Junction - White L junction - external (9012/W) Type linear. Material:PC, colour:white. | Finish White | Code 81048 |
|-----------------|--|--|-----------------|----------------------|
| es future for t | | Junction - Flexible white junction (9018/W) Type flexible curve. Material:PC, colour:white. | Finish White | Code 81066 |
| | | Junction - White X junction (9017/W) Type linear. Material:PC, colour:white. | Finish White | Code 81063 |
| | 254 0 0 0 0 0 0 0 0 0 0 0 0 0 | Junction - Left white T junction - external (9013/W) Type linear. Material:PC, colour:white. | Finish White | Code 81051 |
| | 25.4 10 10 10 10 10 10 10 10 10 10 | Junction - Right white T junction - external (9014/W) Type linear. Material:PC, colour:white. | Finish White | Code 81054 |
| | 254 100 100 100 100 100 100 100 10 | Junction - Left white T junction - internal (9015/W) Type linear. Material:PC, colour:white. | Finish White | Code 81057 |
| | | Junction - Right White T junction - internal (9016/W) Type linear. Material:PC, colour:white. | Finish White | Code 81060 |
| E E | H Control 0 with 0 Control 1 | Junction - Black power supply junction - centrale (9010/B) Type linear. Material:PC, colour:black. | Finish Black | Code 81043 |

Optus_T | Projectors | Accessories 77057W60

| | Junction - Black L junction - internal (9011/B) Type linear. Material:PC, colour:black. | Finish Black | Code 81046 |
|--|--|-----------------|----------------------|
| | Junction - Black L junction - external (9012/B) Type linear. Material:PC, colour:black. | Finish Black | Code 81049 |
| | Junction - Flexible black junction (9018/B) Type flexible curve. Material:PC, colour:black. | Finish Black | Code 81067 |
| | Junction - Black X junction (9017/B) Type linear. Material:PC, colour:black. | Finish Black | Code 81064 |
| 25.4 | Junction - Black left T junction - external (9013/B) Type linear. Material:PC, colour:black. | Finish Black | Code 81052 |
| 254 • • • • • • • • • • • • • • • • • • • | Junction - Right black T junction - external (9014/B) Type linear. Material:PC, colour:black. | Finish Black | Code 81055 |
| 25.4 • • • • • • • • • • • • • • • • • • • | Junction - Left black T junction - internal (9015/B) Type linear. Material:PC, colour:black. | Finish Black | Code 81058 |
| 254 • • • • • • • • • • • • • • • • • • • | Junction - Right black T junction - internal (9016/B) Type linear. Material:PC, colour:black. | Finish Black | Code 81061 |
| Linea Light Group reserves the right, with | out any advance notice, to change the characteristics of their products, as well as the availability of the same | at any time. No | |

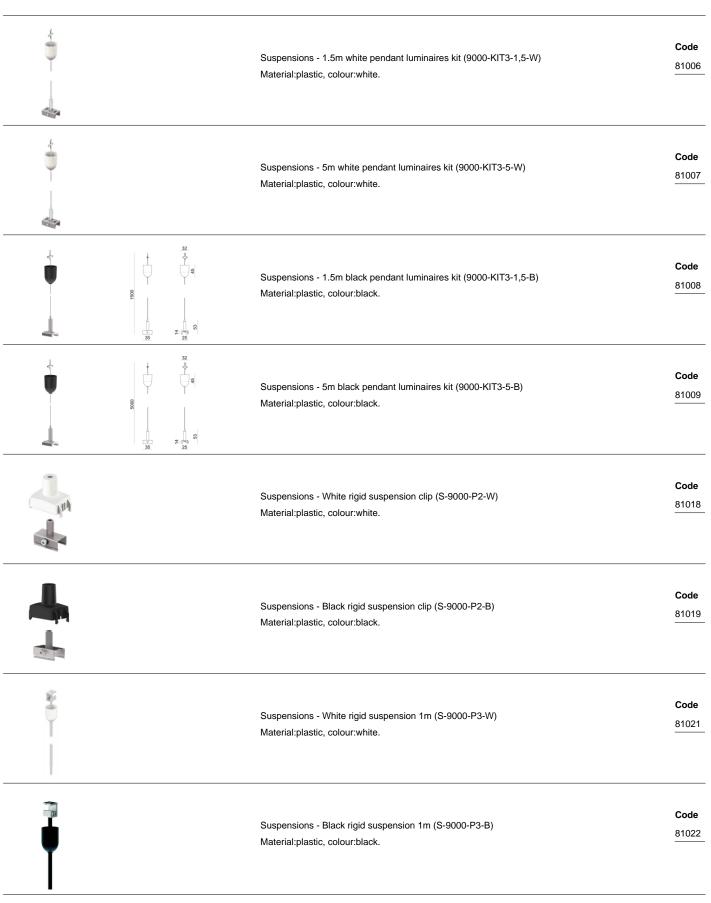

Optus_T | Projectors | Accessories 77057W60

| | | Cable cover - White recessed cover (S-9001-R/6-W) Material:PC, colour:white. | Code 81069 |
|------------------------|-------------------|---|----------------------|
| | • 1100 • | Cable cover - White cover for recessed junction (S-9010-R/6-W) Material:PC, colour:white. | Code 81072 |
| | | Cable cover - White cover for recessed L junction (S-9011-R/6-W) Material:PC, colour:white. | Code 81075 |
| | | Cable cover - White cover for recessed T junction (S-9013-R/6-W) Material:PC, colour:white. | Code 81078 |
| | | Cable cover - White cover for recessed X junction (S-9017-R/6-W) Material:PC, colour:white. | Code 81081 |
| | | Cable cover - Black recessed cover (S-9001-R/6-B) Material:PC, colour:black. | Code 81070 |
| | • EXTORE 0 | Cable cover - Black cover for recessed junction (S-9010-R/6-B) Material:PC, colour:black. | Code 81073 |
| | | Cable cover Material:PC, colour:black. | Code 81076 |
| 9/14 21.12.2024 | | thout any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No tions and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or | linealight. |

product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories 77057W60

| | + teller + | Cable cover - Black cover for recessed T junction (S-9013-R/6-B) Material:PC, colour:black. | Code 81079 |
|------------------|---|---|----------------------|
| | 0 0 0 0 0 0 0 0 0 0 0 | Cable cover - Black cover for recessed X junction (S-9017-R/6-B) Material:PC, colour:black. | Code 81082 |
| | | Cable cover Material:white. | Code 83249 |
| | | Cable cover Material:black, colour:black. | Code 83250 |
| | | White three-phase/DALI adapter (9009/W) | Code 81094 |
| 1. P | | White three-phase adapter (9009-4/W) | Code 81091 |
| | | Black three-phase/DALI adapter (9009/B) | Code 81095 |
| | | Black trhee-phase adapter (9009-4/B) | Code 81093 |
| 10/14 21.12.2024 | Linea Light Group reserves the right, without | but any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No ns and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or | linealight.con |

product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories 77057W60

| | Tool - Cutter S-9000/T | | Code 81005 |
|--|---|-----|----------------------|
| SIA SIA SIA SIA SIA SIA SIA SIA SIA SIA | Track - Three-phase Recessed White DALI Track, 1 m (9000-1/W-R) Length: 1000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating. | | Code 80990 |
| 87.E | Track - Three-phase Recessed White DALI Track, 2 m (9000-2/W-R) Length: 2000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating. | 144 | Code 80991 |
| 934 () () () () () () () () () () | Track - Trhee-phase Recessed White DALI Track, 3 m (9000-3/W-R) Length: 3000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating. | 144 | Code 80992 |
| 87.E | Track - Three-phase Recessed Grey DALI Track, 1 m (9000-1/B-R) Length: 1000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating. | | Code 80993 |
| 87.E | Track - Three-phase Recessed Black DALI Track, 2 m (9000-1/B-R) Length: 2000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating. | | Code 80994 |
| SIA SIA SIA SIA SIA SIA SIA SIA SIA SIA | Track - Three-phase Recessed Black DALI Track, 3 m (9000-3/B-R) Length: 3000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating. | | Code 80995 |
| 37.8 0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0 | Track Length: 1000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating. | | Code 83336 |

11/14 21.12.2024

Optus_T | Projectors | Accessories 77057W60

| | 37.8 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 | Track Length: 2000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating. | FinishCodeWhite83337 |
|---|---|--|----------------------------|
| | 37.8 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 | Track Length: 3000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating. | Finish Code White 83338 |
| | | Track Length: 1000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating. | Finish Code Black 83339 |
| | 37.8 0 0 0 0 0 0 0 0 0 0 0 0 0 0 | Track Length: 2000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating. | Finish Code Black 83340 |
| | 37.8 0 0 0 0 0 0 0 0 0 0 0 0 0 0 | Track Length: 3000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating. | Finish Code Black 83341 |
| | 3 IIIIIIIIIIIIIII | Anti-glare - Accessory for focal kit with code 83347. Anti-glare Type: honeycomb louvre. Material:Pom-C, colour:Black. | Code 99841 |
| 0 | | Anti-glare Anti-glare Type: elliptical filter. Material:Pom-C, colour:Black. | Code 83345 |
| S | | Anti-glare Anti-glare Type: cross louvres. Material:Pom-C, colour:Black. | Code 83344 |

Optus_T | Projectors | Accessories 77057W60

| | Anti-glare Anti-glare Type: 45° cylindrical screen. Material:Pom-C, colour:Black. | Code 83343 |
|------------------|--|----------------------------------|
| | Anti-glare Anti-glare Type: honeycomb louvre. Material:Pom-C, colour:Black. | Code 83346 |
| | Anti-glare Anti-glare Type: cylindrical screen. Material:Pom-C, colour:Black. | Code 83342 |
| | Optics Light distribution: spot,Cover material: uv resistant polycarbonate | Code 83348 |
| | Optics Light distribution: medium flood,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate | Code 83349 |
| | Optics Light distribution: adjustable,Cover material: ,aluminium | Code 83347 |
| | Optics Light distribution: flood,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate | Code 83350 |
| | 124 124 124 124 124 124 125 124 124 125 125 126 127 128 128 1290mm, H=124mm, D=45mm. 124 125 125 126 126 127 128 128 129 129 129 129 129 129 120 120<td>Code <u>C</u>-E700008</td> | Code <u>C</u> -E700008 |
| 13/14 21.12.2024 | Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or | linealight.com |

formation are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_T | Projectors | Accessories 77057W60