


Rolling Sky



Floor Lamp - Bollard & Pole | 220-240 V
1 topLED 15 W DC - 17 W AC | CRI 90
77101M00



Technical data	
Type	- - -
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward and upward
Nominal power	15 W DC
Total Power	17 W
Source lumens	1987 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP65
IK	IK07
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	.980 Kg
Electrostatic discharge protection	Yes
Surge protection	Yes

Finishing casing	
Material	Aluminium
Colour	Black
Processing	Coating
Finishing diffuser	
Material	PMMA
Colour	transparent
Finishing base	
Material	PC
Colour	black

Floor Lamp - Bollard & Pole | 220-240 V | 1 topLED 15 W DC - 17 W AC | CRI 90 | Base
77101M00

Single emission floor lamp or bollard & pole for outdoor application. The super warm white LED light source with a diffused light distribution is composed of 63 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 1987 lm, with a 132.5 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a black finish, processed by means of coating; the diffuser is made of pmma. The ingress protection degree is IP65; the total weight is of .980 kg.

The total absorbed power is 17 W.

The device features protection class I and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	23 %
Source lumens	1987 lm
Delivered lumens	470 lm
Consumption	17 W
Luminaire efficacy	27 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80


Standard Operating Ambient Temperature -20 / +50°C

LED Life / Failure Ratio

L70 B20 C0 72500h (at Tj 115 Ta 25)

OPTICAL

C0/C180 optics	178°
C90/C270 optics	173°
Light distribution symmetry	Symmetrical 2 assis

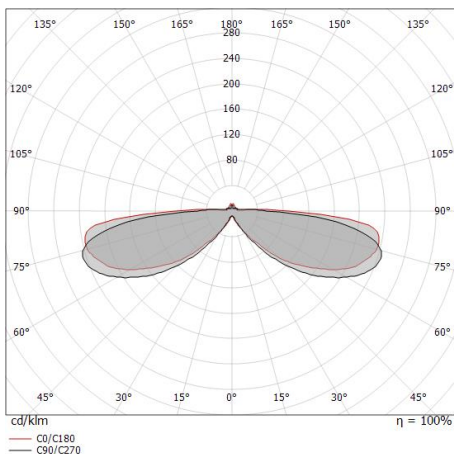


Rolling Sky



Floor Lamp - Bollard & Pole | 220-240 V | 1 topLED 15 W DC - 17 W AC | CRI 90
77101M00


Components



Rolling Sky | Sphere

Code

C-D100002




Rolling Sky | Amphora

Code

C-D100005



Rolling Sky | Bollard & Pole | Accessories
77101M00



Picket
installation position: land,Cover material: pc

Code
14931