




Uplights | 1 arrayLED 8 W DC 220 mA | CRI 80  
77314M15

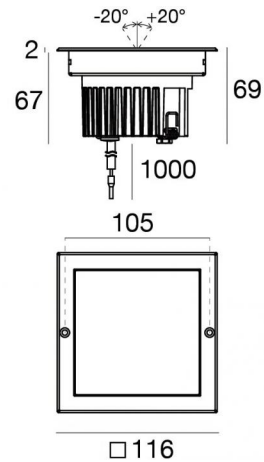

Technical data	
Type	Walk Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Spot
Light emission direction	upward
Nominal power	8 W DC
Source lumens	1080 lm
Input voltage range	220mA
CCT / Tone	2700 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP67
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	Yes
total angle (vertical plane)	40 °
Walk-over	Yes
Drive-over	2000 Kg
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.9 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	Acquastop - TVS

#### Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	black
Processing	Open pore anodizing + Powder Coating

#### Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

#### Finishing flange

Material	AISI 316 steel
Colour	steel
Processing	Brushing

#### Electronics



99342  
On/Off Driver 198-264V AC (1 art.)

#### Cables Electrification

Cable connector	No
-----------------	----



## Uplights | 1 arrayLED 8 W DC 220 mA | CRI 80 | Base 77314M15


Single emission uplights for outdoor application. The super warm white LED light source with a spot light distribution is composed of 1 arrayed LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 1080 lm, with a 135.0 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 0.9 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 8 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 83410(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

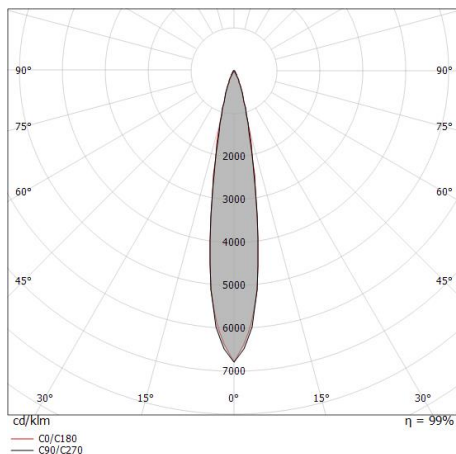

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.16 0.16	E(0°) 18262 E(C90) 8.9° 8950 E(C0) 9.0° 8916
1.0	0.31 0.32	E(0°) 4566 E(C90) 8.9° 2237 E(C0) 9.0° 2229
1.5	0.47 0.48	E(0°) 2029 E(C90) 8.9° 994 E(C0) 9.0° 991
2.0	0.63 0.63	E(0°) 1141 E(C90) 8.9° 559 E(C0) 9.0° 557
2.5	0.78 0.79	E(0°) 730 E(C90) 8.9° 358 E(C0) 9.0° 357
3.0	0.94 0.95	E(0°) 507 E(C90) 8.9° 249 E(C0) 9.0° 248

— C0/C180 (Half-peak divergence: 18.0°)  
— C90/C270 (Half-peak divergence: 17.8°)

### Energy efficiency class

This product contains a light source of energy efficiency class F.

### Illuminotechnical Features

Light Output Ratio (LOR)	62 %
Source lumens	1080 lm
Delivered lumens	673 lm
Consumption	8 W
Luminaire efficacy	84 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra
Black Body Locus	On

Standard Operating Ambient Temperature -20 / +50°C

Ordinary temperature on the glass 50°C

### LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25)



### UGR

UGR axial	8.3
UGR transversal	8.3
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	18°
Light distribution simmetry	Symmetrical

### COLOR VECTOR GRAPHIC

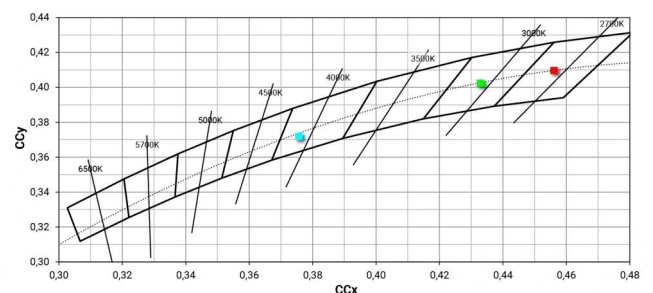



Orma\_QJ | Uplights | Accessories  
**77314M15**



Outer casing

installation position: floor, land; type of installation: masonry L=114mm, H=93mm,  
D=114mm.

Material:ABS Plastic, colour:black.

**Code**

83410