




Downlights | arrayLED 0 W DC 700 mA | CRI 80  
77330A15

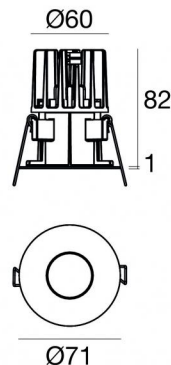

64

## Technical data

|  |                        |
|--|------------------------|
| Type   | Encasement with flange |
| Installation position                          | Ceiling                |
| Installation environment                       | Indoor                 |
| Light Source                                   | LED                    |
| Circuit structure                              | arrayLED               |
| Optics   | Spot                   |
| Light emission direction                       | downward               |
| Nominal power                                  | 0 W DC                 |
| Input voltage range                            | 700mA                  |
| CCT / Tone                                     | 2200 K                 |
| Colour rendering index                         | 80 Ra                  |
| C.C. / C.V.                                    | CC                     |
| Safety class                                   | 3                      |
| IP   | IP40                   |
| Optical compartment IP                         | IP65                   |
| Glow wire test                                 | 850°                   |
| Direct mounting on normally flammable surfaces | Yes                    |
| CE   | Yes                    |
| Driver included                                | No                     |
| Dimmable article                               | DALI - 1-10V           |
| Directional                                    | No                     |
| Tilting  | No                     |
| Walk-over                                      | No                     |
| Drive-over                                     | No                     |
| Cable included                                 | Yes                    |
| Cable length                                   | 0.2 m                  |
| Resin potting                                  | No                     |
| Type of light emission                         | Single emission        |
| Net weight                                     | 0.2 Kg                 |
| Electrostatic discharge protection             | No                     |
| Surge protection                               | No                     |

## Finishing casing

|          |                |
|----------|----------------|
| Material | Technopolymer  |
| Colour   | White RAL 9003 |

## Finishing diffuser

|          |                            |
|----------|----------------------------|
| Material | UV Resistant Polycarbonate |
| Colour   | transparent                |













## Finishing radiator

|            |                                  |
|------------|----------------------------------|
| Material   | Die-cast Aluminium EN AB - 46100 |
| Colour     | Aluminium                        |
| Processing | Polishing                        |

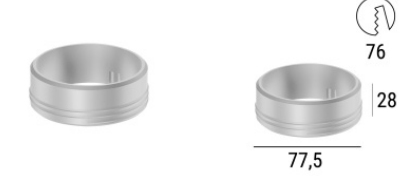







## Cables Electrification


|                 |                                   |
|-----------------|-----------------------------------|
| Cable connector | JST Quick connector Male + Female |
|-----------------|-----------------------------------|



|   |   |   |
|---|---|---|
|    | <p>Outer casing<br/>installation position: ceiling; type of installation: masonry L=200mm, H=113mm, D=137mm.<br/>Material:polypropylene, colour:white.</p>                                  | <p><b>Code</b><br/><u>89373</u></p>   |
|    | <p>Outer casing<br/>installation position: ceiling; type of installation: masonry L=370mm, H=120mm, D=200mm.<br/>Material:polypropylene, colour:white.</p>                                  | <p><b>Code</b><br/><u>89374</u></p>   |
|   | <p>Outer casing<br/>installation position: ceiling; type of installation: drywall L=77.5mm, H=28mm, D=77.5mm.<br/>Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p> | <p><b>Finish</b><br/> <b>Code</b><br/><u>99849</u></p> |
|   | <p>Optics<br/>Light distribution: medium wide flood,Cover material: uv resistant polycarbonate</p>  | <p><b>Code</b><br/><u>83372</u></p>   |
|   | <p>Optics<br/>Light distribution: medium flood,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate</p>  | <p><b>Code</b><br/><u>83371</u></p>   |
|   | <p>Optics<br/>Light distribution: spot,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate</p>  | <p><b>Code</b><br/><u>83370</u></p>   |
|   | <p>Anti-glare<br/>Anti-glare Type: honeycomb louvre.<br/>Material:Pom-C, colour:Black.</p>  | <p><b>Code</b><br/><u>83367</u></p>   |
|   | <p>Diffuser<br/>Diffuser Type: elliptical filter</p>  | <p><b>Code</b><br/><u>83368</u></p>   |



|   |  |                                     |
|---|--|-------------------------------------|
|               | <p>Diffuser<br/>Diffuser Type: aesthetic filter</p>            | <p><b>Code</b><br/><u>83369</u></p> |
|              | <p>White Quantum_R EVO frontal Kit</p>                         | <p><b>Code</b><br/><u>83361</u></p> |
|              | <p>Black Quantum_R EVO frontal Kit</p>                         | <p><b>Code</b><br/><u>83362</u></p> |
|            | <p>Black Vos_R EVO frontal Kit</p>                             | <p><b>Code</b><br/><u>83366</u></p> |
|            | <p>White Vos_R EVO frontal Kit</p>                             | <p><b>Code</b><br/><u>83365</u></p> |
|            | <p>Black Warp_R EVO frontal Kit</p>                            | <p><b>Code</b><br/><u>83364</u></p> |
|            | <p>White Warp_R EVO frontal Kit</p>                            | <p><b>Code</b><br/><u>83363</u></p> |
|  <p>Ø81</p> | <p>White front adaptive flange for Warp EVO or Quantum EVO</p> | <p><b>Code</b><br/><u>83393</u></p> |



Black front adaptive flange for Warp EVO or Quantum EVO

**Code**  
83394



Gold Quantum\_R EVO frontal Kit

**Code**  
C-K400038



Copper Quantum EVO frontal Kit

**Code**  
C-K400039



Gold Warp\_R EVO frontal Kit

**Code**  
C-K400040



Copper Warp\_R EVO frontal Kit

**Code**  
C-K400041




Gold Vos\_R EVO frontal Kit

**Code**  
C-K400042



Copper Vos\_R EVO frontal Kit

**Code**  
C-K400043




Gold front adaptive flange for Warp EVO or Quantum EVO

**Code**  
C-K400044



Vos\_EVO | Downlights | Accessories  
**77330A15**



Copper front adaptive flange for Warp EVO or Quantum EVO

**Code**

C-K400045