



Downlights | 1 arrayLED 9 W DC 700 mA | CRI 80
77331A30



64

Technical data

Type	Encasement with flange
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	arrayLED
Optics	Medium Flood
Light emission direction	downward
Nominal power	9 W DC
Source lumens	892 lm
Input voltage range	700mA
CCT / Tone	2200 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP40
Optical compartment IP	IP65
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.2 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Technopolymer
Colour	Black
Processing	Coating

Finishing diffuser

Material	UV Resistant Polycarbonate
Colour	transparent

Finishing radiator

Material	Die-cast Aluminium EN AB - 46100
Colour	Aluminium
Processing	Polishing

Electronics



99147
On/Off Driver 198-264V AC



99735
Multi Power 198-264V AC / 180-275V DC



99733
1-10V Multi Power 198-264V AC / 180-275V DC



C-E100012
Push and Simply Dim - DALI-2 Controller



C-E100016
Push and Simply Dim - DALI-2 Controller

Cables Electrification

Cable connector	JST Quick connector Male + Female
-----------------	-----------------------------------

Downlights | 1 arrayLED 9 W DC 700 mA | CRI 80 | Base 77331A30


Single emission recessed downlights for indoor application. The ancient white LED light source with a medium flood light distribution is composed of 1 arrayed LEDs with CCT of 2200 K and a CRI 80; the source luminous flux is 892 lm, with a 99.1 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a black finish, processed by means of coating; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP40; the total weight is of 0.2 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 9 W. The power supply cable is included and features a 0.2 m length.

The device features protection class III and can be ceiling-mounted, with a 64 mm diameter hole (in plasterboard) with an outer casing, code 99849(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

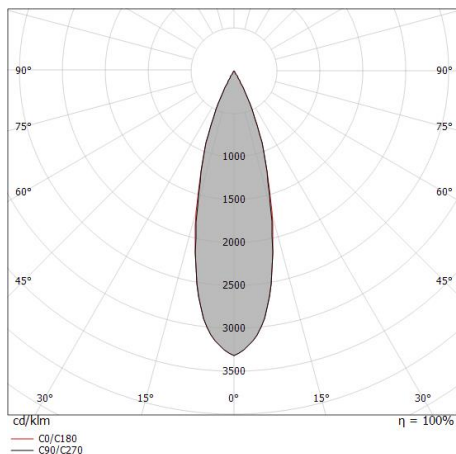

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.26 0.27	E(0°) 7452 E(C90) 14.8° 3387 E(C0) 15.2° 3374
1.0	0.53 0.54	E(0°) 1863 E(C90) 14.8° 847 E(C0) 15.2° 843
1.5	0.79 0.82	E(0°) 828 E(C90) 14.8° 376 E(C0) 15.2° 375
2.0	1.06 1.09	E(0°) 466 E(C90) 14.8° 212 E(C0) 15.2° 211
2.5	1.32 1.36	E(0°) 298 E(C90) 14.8° 135 E(C0) 15.2° 135
3.0	1.59 1.63	E(0°) 207 E(C90) 14.8° 94 E(C0) 15.2° 94

— C0/C180 (Half-peak divergence: 30.4°)
— C90/C270 (Half-peak divergence: 29.6°)

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features

Light Output Ratio (LOR)	63 %
Source lumens	892 lm
Delivered lumens	562 lm
Consumption	9 W
Luminaire efficacy	62 lm/W
Colour temperature	2200 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C










UGR

UGR axial	9.2
UGR transversal	9.2
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

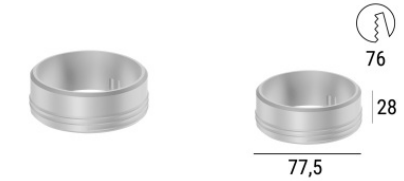







OPTICAL


C0/C180 optics	30°
Light distribution simmetry	Symmetrical



	<p>Outer casing installation position: ceiling; type of installation: masonry L=200mm, H=113mm, D=137mm. Material:polypropylene, colour:white.</p>	<p>Code 89373</p>
	<p>Outer casing installation position: ceiling; type of installation: masonry L=370mm, H=120mm, D=200mm. Material:polypropylene, colour:white.</p>	<p>Code 89374</p>
	<p>Outer casing installation position: ceiling; type of installation: drywall L=77.5mm, H=28mm, D=77.5mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish  Code 99849</p>
	<p>Optics Light distribution: medium wide flood,Cover material: uv resistant polycarbonate</p>	<p>Code 83372</p>
	<p>Optics Light distribution: medium flood,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate</p>	<p>Code 83371</p>
	<p>Optics Light distribution: spot,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate</p>	<p>Code 83370</p>
	<p>Anti-glare Anti-glare Type: honeycomb louvre. Material:Pom-C, colour:Black.</p>	<p>Code 83367</p>
	<p>Diffuser Diffuser Type: elliptical filter</p>	<p>Code 83368</p>



	<p>Diffuser Diffuser Type: aesthetic filter</p>	<p>Code <u>83369</u></p>
	<p>White Quantum_R EVO frontal Kit</p>	<p>Code <u>83361</u></p>
	<p>Black Quantum_R EVO frontal Kit</p>	<p>Code <u>83362</u></p>
	<p>Black Vos_R EVO frontal Kit</p>	<p>Code <u>83366</u></p>
	<p>White Vos_R EVO frontal Kit</p>	<p>Code <u>83365</u></p>
	<p>Black Warp_R EVO frontal Kit</p>	<p>Code <u>83364</u></p>
	<p>White Warp_R EVO frontal Kit</p>	<p>Code <u>83363</u></p>
 <p>Ø81</p>	<p>White front adaptive flange for Warp EVO or Quantum EVO</p>	<p>Code <u>83393</u></p>



Black front adaptive flange for Warp EVO or Quantum EVO

Code
83394



Gold Quantum_R EVO frontal Kit

Code
C-K400038



Copper Quantum EVO frontal Kit

Code
C-K400039



Gold Warp_R EVO frontal Kit

Code
C-K400040



Copper Warp_R EVO frontal Kit

Code
C-K400041




Gold Vos_R EVO frontal Kit

Code
C-K400042



Copper Vos_R EVO frontal Kit

Code
C-K400043




Gold front adaptive flange for Warp EVO or Quantum EVO

Code
C-K400044



Vos_EVO | Downlights | Accessories
77331A30



Copper front adaptive flange for Warp EVO or Quantum EVO

Code

C-K400045