




Downlights | 1 arrayLED 9 W DC 700 mA | CRI 80  
77354A30

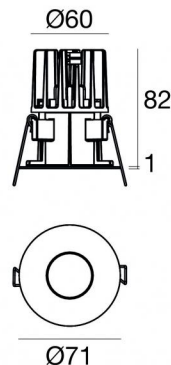

Technical data	
Type	Encasement with flange
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	arrayLED
Optics	Flood
Light emission direction	downward
Nominal power	9 W DC
Source lumens	892 lm
Input voltage range	700mA
CCT / Tone	2200 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP40
Optical compartment IP	IP65
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.2 Kg
Electrostatic discharge protection	No
Surge protection	No
Optics technology	Honey comb

### Finishing casing

Material	Technopolymer
Colour	White RAL 9003

### Finishing diffuser

Material	UV Resistant Polycarbonate
Colour	transparent

### Finishing radiator

Material	Die-cast Aluminium EN AB - 46100
Colour	Aluminium
Processing	Polishing

### Electronics

	99147 On/Off Driver 198~264V AC (2 - 2 art.)
	99735 Multi Power 198~264V AC / 180~275V DC (1 art.)
	99733 1-10V Multi Power 198~264V AC / 180~275V DC (1 art.)
	C-E100012 Push and Simply Dim - DALI-2 Controller (1 art.)
	C-E100016 Push and Simply Dim - DALI-2 Controller (2 - 3 art.)

### Cables Electrification

Cable connector	JST Quick connector Male + Female
-----------------	-----------------------------------



## Downlights | 1 arrayLED 9 W DC 700 mA | CRI 80 | Base 77354A30

Single emission recessed downlights for indoor application. The ancient white LED light source with a flood light distribution is composed of 1 arrayed LEDs with CCT of 2200 K and a CRI 80; the source luminous flux is 892 lm, with a 99.1 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white ral 9003 finish; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP40; the total weight is of 0.2 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 9 W. The power supply cable is included and features a 0.2 m length.

The device features protection class III and can be ceiling-mounted, with a 64 mm diameter hole (in plasterboard) with an outer casing, code 99849(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class F.

### Illuminotechnical Features


Light Output Ratio (LOR)	46 %
Source lumens	892 lm
Delivered lumens	412 lm
Consumption	9 W
Luminaire efficacy	45 lm/W
Colour temperature	2200 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### UGR

UGR axial	2.6
UGR transversal	2.6
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL



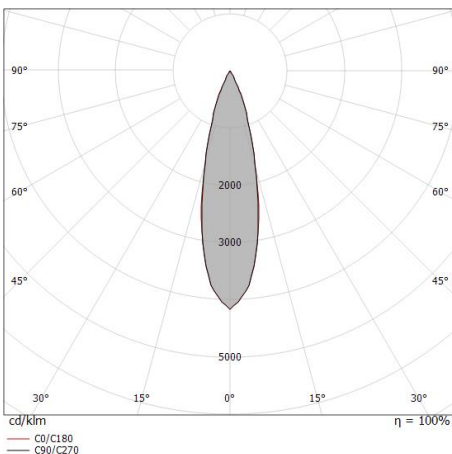





C0/C180 optics	26°
Light distribution simmetry	Symmetrical





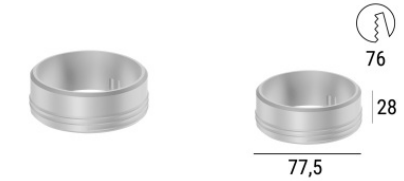





Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.23 0.24	E(0°) 6855 E(C90) 3198 E(C0) 3194
1.0	0.47 0.47	E(0°) 1714 E(C90) 799 E(C0) 798
1.5	0.70 0.71	E(0°) 762 E(C90) 355 E(C0) 355
2.0	0.93 0.95	E(0°) 428 E(C90) 200 E(C0) 200
2.5	1.16 1.18	E(0°) 274 E(C90) 128 E(C0) 128
3.0	1.40 1.42	E(0°) 190 E(C90) 89 E(C0) 89


— C0/C180 (Half-peak divergence: 26.6°)  
— C90/C270 (Half-peak divergence: 26.2°)



	<p>Outer casing installation position: ceiling; type of installation: masonry L=200mm, H=113mm, D=137mm. Material:polypropylene, colour:white.</p>	<p><b>Code</b> <u>89373</u></p>
	<p>Outer casing installation position: ceiling; type of installation: masonry L=370mm, H=120mm, D=200mm. Material:polypropylene, colour:white.</p>	<p><b>Code</b> <u>89374</u></p>
	<p>Outer casing installation position: ceiling; type of installation: drywall L=77.5mm, H=28mm, D=77.5mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p><b>Finish</b> [Grey Box] <b>Code</b> <u>99849</u></p>
	<p>Optics Light distribution: medium wide flood,Cover material: uv resistant polycarbonate</p>	<p><b>Code</b> <u>83372</u></p>
	<p>Optics Light distribution: medium flood,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate</p>	<p><b>Code</b> <u>83371</u></p>
	<p>Optics Light distribution: spot,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate</p>	<p><b>Code</b> <u>83370</u></p>
	<p>Anti-glare Anti-glare Type: honeycomb louvre. Material:Pom-C, colour:Black.</p>	<p><b>Code</b> <u>83367</u></p>
	<p>Diffuser Diffuser Type: elliptical filter</p>	<p><b>Code</b> <u>83368</u></p>



	<p>Diffuser                  Diffuser Type: aesthetic filter</p>	<p><b>Code</b>  <u>83369</u></p>
	<p>White Quantum_R EVO frontal Kit</p>	<p><b>Code</b>  <u>83361</u></p>
	<p>Black Quantum_R EVO frontal Kit</p>	<p><b>Code</b>  <u>83362</u></p>
	<p>Black Vos_R EVO frontal Kit</p>	<p><b>Code</b>  <u>83366</u></p>
	<p>White Vos_R EVO frontal Kit</p>	<p><b>Code</b>  <u>83365</u></p>
	<p>Black Warp_R EVO frontal Kit</p>	<p><b>Code</b>  <u>83364</u></p>
	<p>White Warp_R EVO frontal Kit</p>	<p><b>Code</b>  <u>83363</u></p>
 <p>Ø81</p>	<p>White front adaptive flange for Warp EVO or Quantum EVO</p>	<p><b>Code</b>  <u>83393</u></p>



Black front adaptive flange for Warp EVO or Quantum EVO

**Code**  
83394



Gold Quantum\_R EVO frontal Kit

**Code**  
C-K400038



Copper Quantum EVO frontal Kit

**Code**  
C-K400039



Gold Warp\_R EVO frontal Kit

**Code**  
C-K400040



Copper Warp\_R EVO frontal Kit

**Code**  
C-K400041




Gold Vos\_R EVO frontal Kit

**Code**  
C-K400042



Copper Vos\_R EVO frontal Kit

**Code**  
C-K400043



Gold front adaptive flange for Warp EVO or Quantum EVO

**Code**  
C-K400044



Copper front adaptive flange for Warp EVO or Quantum EVO

**Code**

C-K400045