



Downlights | 1 arrayLED 9 W DC 700 mA | CRI 90  
77354W15



Technical data	
Type	Encasement with flange
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	arrayLED
Optics	Spot
Light emission direction	downward
Nominal power	9 W DC
Source lumens	1119 lm
Input voltage range	700mA
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP40
Optical compartment IP	IP65
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.2 Kg
Electrostatic discharge protection	No
Surge protection	No
Optics technology	Honey comb

### Finishing casing

Material	Technopolymer
Colour	White RAL 9003

### Finishing diffuser

Material	UV Resistant Polycarbonate
Colour	transparent

### Finishing radiator

Material	Die-cast Aluminium EN AB - 46100
Colour	Aluminium
Processing	Polishing

### Electronics

	99147 On/Off Driver 198~264V AC (2 - 2 art.)
	99735 Multi Power 198~264V AC / 180~275V DC (1 art.)
	99733 1-10V Multi Power 198~264V AC / 180~275V DC (1 art.)
	C-E100012 Push and Simply Dim - DALI-2 Controller (1 art.)
	C-E100016 Push and Simply Dim - DALI-2 Controller (2 - 3 art.)

### Cables Electrification

Cable connector	JST Quick connector Male + Female
-----------------	-----------------------------------



## Downlights | 1 arrayLED 9 W DC 700 mA | CRI 90 | Base 77354W15


Single emission recessed downlights for indoor application. The warm white LED light source with a spot light distribution is composed of 1 arrayed LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 1119 lm, with a 124.3 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white ral 9003 finish; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP40; the total weight is of 0.2 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 9 W. The power supply cable is included and features a 0.2 m length.

The device features protection class III and can be ceiling-mounted, with a 64 mm diameter hole (in plasterboard) with an outer casing, code 99849(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

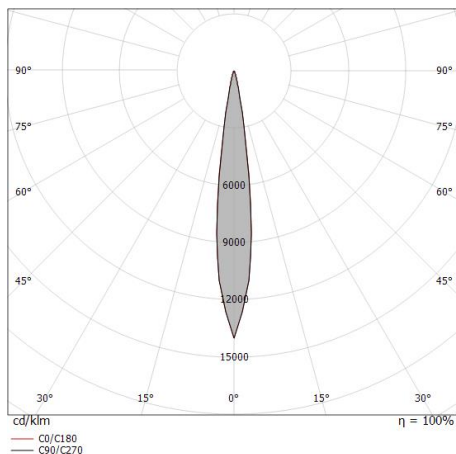

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.12 0.12	E(0°) 29117 E(C90) 7.0° 14397 E(C0) 6.9° 14508
1.0	0.25 0.24	E(0°) 7279 E(C90) 7.0° 3599 E(C0) 6.9° 3627
1.5	0.37 0.36	E(0°) 3235 E(C90) 7.0° 1600 E(C0) 6.9° 1612
2.0	0.49 0.48	E(0°) 1820 E(C90) 7.0° 900 E(C0) 6.9° 907
2.5	0.61 0.61	E(0°) 1165 E(C90) 7.0° 576 E(C0) 6.9° 580
3.0	0.74 0.73	E(0°) 809 E(C90) 7.0° 400 E(C0) 6.9° 403

— C0/C180 (Half-peak divergence: 13.8°)  
— C90/C270 (Half-peak divergence: 14.0°)

### Energy efficiency class

This product contains a light source of energy efficiency class E.

### Illuminotechnical Features

Light Output Ratio (LOR)	46 %
Source lumens	1119 lm
Delivered lumens	520 lm
Consumption	9 W
Luminaire efficacy	57 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	90 Ra

Standard Operating Ambient Temperature -20 / +50°C

Ordinary temperature on the glass 40°C

### LED Life / Failure Ratio

L70 B10 C0 112960h (at Tj 65 Ta 25 )









### UGR

UGR axial	-0.5
UGR transversal	-0.5
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20



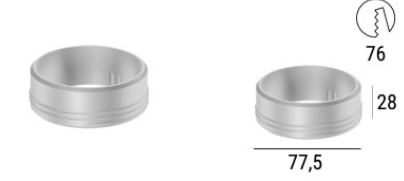





### OPTICAL


C0/C180 optics	14°
Light distribution simmetry	Symmetrical



	<p>Outer casing installation position: ceiling; type of installation: masonry L=200mm, H=113mm, D=137mm. Material:polypropylene, colour:white.</p>	<p><b>Code</b> <u>89373</u></p>
	<p>Outer casing installation position: ceiling; type of installation: masonry L=370mm, H=120mm, D=200mm. Material:polypropylene, colour:white.</p>	<p><b>Code</b> <u>89374</u></p>
	<p>Outer casing installation position: ceiling; type of installation: drywall L=77.5mm, H=28mm, D=77.5mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p><b>Finish</b> [Grey Box] <b>Code</b> <u>99849</u></p>
	<p>Optics Light distribution: medium wide flood,Cover material: uv resistant polycarbonate</p>	<p><b>Code</b> <u>83372</u></p>
	<p>Optics Light distribution: medium flood,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate</p>	<p><b>Code</b> <u>83371</u></p>
	<p>Optics Light distribution: spot,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate</p>	<p><b>Code</b> <u>83370</u></p>
	<p>Anti-glare Anti-glare Type: honeycomb louvre. Material:Pom-C, colour:Black.</p>	<p><b>Code</b> <u>83367</u></p>
	<p>Diffuser Diffuser Type: elliptical filter</p>	<p><b>Code</b> <u>83368</u></p>



	<p>Diffuser                  Diffuser Type: aesthetic filter</p>	<p><b>Code</b>  <u>83369</u></p>
	<p>White Quantum_R EVO frontal Kit</p>	<p><b>Code</b>  <u>83361</u></p>
	<p>Black Quantum_R EVO frontal Kit</p>	<p><b>Code</b>  <u>83362</u></p>
	<p>Black Vos_R EVO frontal Kit</p>	<p><b>Code</b>  <u>83366</u></p>
	<p>White Vos_R EVO frontal Kit</p>	<p><b>Code</b>  <u>83365</u></p>
	<p>Black Warp_R EVO frontal Kit</p>	<p><b>Code</b>  <u>83364</u></p>
	<p>White Warp_R EVO frontal Kit</p>	<p><b>Code</b>  <u>83363</u></p>
 <p>Ø81</p>	<p>White front adaptive flange for Warp EVO or Quantum EVO</p>	<p><b>Code</b>  <u>83393</u></p>



Black front adaptive flange for Warp EVO or Quantum EVO

**Code**  
83394



Gold Quantum\_R EVO frontal Kit

**Code**  
C-K400038



Copper Quantum EVO frontal Kit

**Code**  
C-K400039



Gold Warp\_R EVO frontal Kit

**Code**  
C-K400040



Copper Warp\_R EVO frontal Kit

**Code**  
C-K400041




Gold Vos\_R EVO frontal Kit

**Code**  
C-K400042




Copper Vos\_R EVO frontal Kit

**Code**  
C-K400043



Gold front adaptive flange for Warp EVO or Quantum EVO

**Code**  
C-K400044



Copper front adaptive flange for Warp EVO or Quantum EVO

**Code**

C-K400045