



Ink system_L

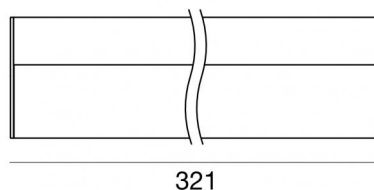

Systems - Lines | 40 topLED 11 W DC 24 V | CRI 90
77582M00



Technical data	
Designer	Linea Light
Construction year	2020
Type	Cabled - -
Installation position	Cable
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward
Nominal power	11 W DC
Source lumens	988 lm
Input voltage range	24V
Frequency	50-60 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V - PUSH DIM
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	0.230 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Aluminium
Colour	White RAL 9003
Processing	Coating


Finishing diffuser

Material	PC
Colour	opaline

Electronics

 81416
On/Off Driver 220~240V AC 120 W

 81417
On/Off Driver 220~240V AC 180 W

 83042
1-10V - Push and Simply Dim - DALI-2 Controller



Systems - Lines | 40 topLED 11 W DC 24 V | CRI 90 | Base
77582M00

Single emission systems or lines for indoor application. The super warm white LED light source with a diffused light distribution is composed of 40 topped LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 988 lm, with a 89.8 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a white ral 9003 finish, processed by means of coating; the diffuser is made of PC. The ingress protection degree is IP40; the total weight is of 0.230 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 11 W.

The device features protection class III and can be cable-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features

Light Output Ratio (LOR)	62 %
Source lumens	988 lm
Delivered lumens	619 lm
Consumption	11 W
Luminaire efficacy	56 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80


Standard Operating Ambient Temperature -20 / +50°C

LED Life / Failure Ratio

L70 B20 C0 72500h (at Tj 115 Ta 25)

OPTICAL

C90/C270 optics	111°
C0/C180 optics	180°
Light distribution symmetry	Symmetrical 2 assis

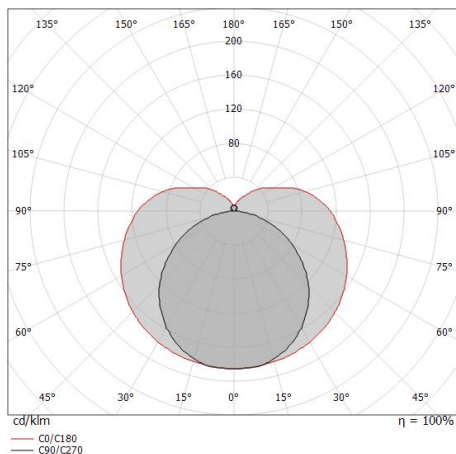



		<p>Cable Type of cable power cable; Length 5000 mm; insulation double; section 1.5 mm²; cable gland: no; colors: white - red.</p>	<p>Code <u>83412</u></p>
		<p>Cable Type of cable power cable; Length 10000 mm; insulation double; section 1.5 mm²; cable gland: no; colors: white - red.</p>	<p>Code <u>83413</u></p>
		<p>Cable Type of cable power cable; Length 1000 mm; insulation double; section 1.5 mm²; cable gland: no; colors: black - red.</p>	<p>Code <u>83414</u></p>
		<p>Profile - Kit 5 x Material:Aluminium, colour:5G 9005 Black, processing:Coating.</p>	<p>Code <u>81426</u></p>
		<p>Profile - Kit 2 x Material:Aluminium, colour:5G 9005 Black, processing:Coating.</p>	<p>Code <u>81430</u></p>
		<p>Cable cover Material:PC, colour:White, processing:Coating.</p>	<p>Code <u>83417</u></p>
		<p>Junction Type linear. Material:PC, colour:White, processing:Coating.</p>	<p>Finish <u>White</u> Code <u>83418</u></p>
		<p>Junction Type linear. Material:PC, colour:White, processing:Coating.</p>	<p>Finish <u>White</u> Code <u>83419</u></p>




Ink system_L | Lines | Accessories
77582M00

		<p>Junction Type linear. Material:PC, colour:White, processing:Coating.</p>	<p>Finish White</p>	<p>Code 83420</p>
		<p>Closing cap Material:PC, colour:White, processing:Coating.</p>	<p>Code 83421</p>	
		<p>Profile Material:Aluminium, processing:Coating.</p>	<p>Code 84010</p>	
		<p>Profile Material:Aluminium, processing:Coating.</p>	<p>Code 84011</p>	
		<p>Bracket - 2X installation position: wall lights, ceiling. Material:Aluminium, colour:White, processing:Coating.</p>	<p>Finish White</p>	<p>Code 83422</p>
		<p>Cable cover - 2X Material:Iron, colour:White, processing:Coating.</p>	<p>Code 83423</p>	
		<p>Cable cover - 2X Material:Rubber, colour:white.</p>	<p>Code 83424</p>	
		<p>Cables for suspension Material:Aluminium, colour:White, processing:Coating.</p>	<p>Code 83425</p>	



Ink system_L | Lines | Accessories
77582M00

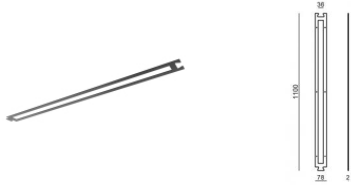

Template
 Material:Iron, colour:5G 9005 Black, processing:Coating.

Code
83186



Tool
 Material:steel, colour:steel.

Code
81427



Cables for suspension
 Material:Aluminium, colour:White RAL 9003, processing:Coating.

Code
83427

Junction
 Material:Aluminium, colour:White RAL 9003, processing:Coating.

Finish
 White
Code
83437

Junction
 Material:Aluminium, colour:White RAL 9003, processing:Coating.

Finish
 White
Code
83439

Junction
 Material:Aluminium, colour:White RAL 9003, processing:Coating.

Finish
 White
Code
83441

Junction

Code
83442

Cables for suspension
 Material:Aluminium, colour:White RAL 9003, processing:Coating.

Code
83444



Ink system_L | Lines | Accessories
77582M00

Cable
Length 1000 mm; colors: black.

Code
83445

Cable
Length 1000 mm; colors: black.

Code
83446