


# Nautilus\_RP



Submerged | 1 x powerLED 4 W DC 350 mA | CRI 80  
80314M15



Technical data	
Type	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Spot
Light emission direction	upward
Nominal power	4 W DC
Source lumens	490 lm
Input voltage range	350mA
CCT / Tone	2700 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP68
Maximum installation depth	25 m
Installation limitations	Only underwater
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	5 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.4 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	Acquastop - TVS

## Finishing casing

Material	AISI 316L steel
Colour	steel

## Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent

## Finishing bracket

Material	AISI 316 steel
Colour	steel

## Electronics



89421  
On/Off Driver 198~264V AC / 176~275V DC (1 art.)



C-E200006  
On/Off Driver 198~264V AC / 180~275V DC (1 - 3 art.)

## Cables Electrification

Cable connector	No
-----------------	----



Submerged | 1 x powerLED 4 W DC 350 mA | CRI 80 | Base  
**80314M15**

Single emission submerged for outdoor application. The super warm white LED light source with a spot light distribution is composed of 1 powerLEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 490 lm, with a 122.5 lm/W nominal luminous efficacy.

The device body is made of aisi 316l steel and features a steel finish; the diffuser is made of extra clear glass - tempered. The ingress protection degree is IP68; the total weight is of 0.4 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 4 W. The power supply cable is included and features a 5 m length.

The device features protection class III and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class E.

### Illuminotechnical Features

Light Output Ratio (LOR)	84 %
Source lumens	490 lm
Delivered lumens	412 lm
Consumption	4 W
Luminaire efficacy	103 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Black Body Locus	On

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio


L70 B10 C0 247450h (at Tj 60 Ta 25)

### UGR

UGR axial	21.5
UGR transversal	21.7
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	15°
Light distribution symmetry	Symmetrical

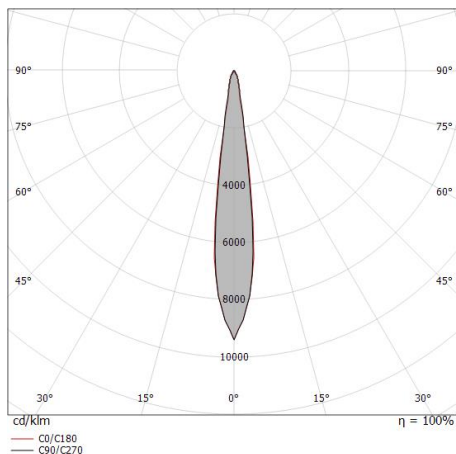

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.13 0.11	E(0°) 15490 E(C90) 7.4° 7575 E(C0) 7.5° 7558
1.0	0.26 0.26	E(0°) 3873 E(C90) 7.4° 1894 E(C0) 7.5° 1889
1.5	0.39 0.39	E(0°) 1721 E(C90) 7.4° 942 E(C0) 7.5° 840
2.0	0.52 0.53	E(0°) 968 E(C90) 7.4° 473 E(C0) 7.5° 472
2.5	0.65 0.66	E(0°) 620 E(C90) 7.4° 303 E(C0) 7.5° 302
3.0	0.78 0.79	E(0°) 430 E(C90) 7.4° 210 E(C0) 7.5° 210

— C0/C180 (Half-peak divergence: 15.0°)  
— C90/C270 (Half-peak divergence: 14.8°)

### COLOR VECTOR GRAPHIC

