




Uplights | 198-264 V  
1 x powerLED 8 W DC - 9 W AC | CRI 80  
**80557M06**

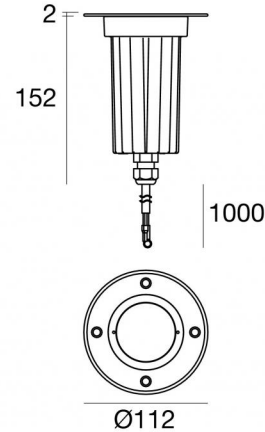

Technical data	
Type	Drive Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Ultra Spot
Light emission direction	upward
Nominal power	8 W DC
Total Power	9 W
Source lumens	877 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP68
Installation limitations	Not for underwater use
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	2500 Kg
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.780 Kg
Electrostatic discharge protection	Yes
Surge protection	4 KV
Optics technology	Honey comb
Product technological characteristics	Acquastop - TVS

### Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	black
Processing	Open pore anodizing + Powder Coating

### Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent

### Finishing flange

Material	AISI 316L steel
Colour	steel
Processing	Brushing

### Cables Electrification

Cable connector	No
-----------------	----



Uplights | 198-264 V | 1 x powerLED 8 W DC - 9 W AC | CRI 80 | Base 80557M06

Single emission uplights for outdoor application. The super warm white LED light source with a ultra spot light distribution is composed of 1 powered LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 877 lm, with a 109.6 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered. The ingress protection degree is IP68; the total weight is of 0.780 kg.

The total absorbed power is 9 W. The power supply cable is included and features a 1 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98122(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class E.

### Illuminotechnical Features

Light Output Ratio (LOR)	53 %
Source lumens	877 lm
Delivered lumens	470 lm
Consumption	9 W
Luminaire efficacy	52 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra
Black Body Locus	On
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio


L70 B10 C0 247450h (at Tj 60 Ta 25 )

### UGR

UGR axial	10.4
UGR transversal	10.2
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	9°
Light distribution simmetry	Symmetrical

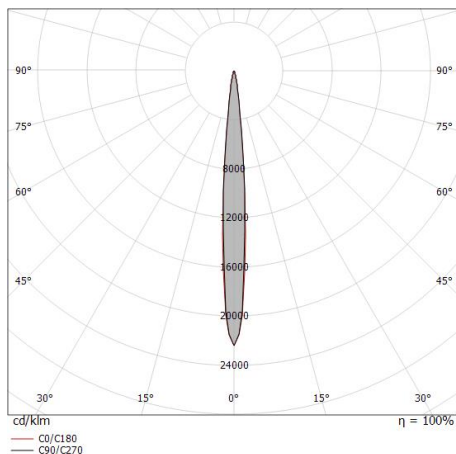

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.08 0.08	E(0°) 42131 E(C90) 4.5° 21069 E(C0) 4.6° 21415
1.0	0.16 0.16	E(0°) 10533 E(C90) 4.5° 5267 E(C0) 4.6° 5354
1.5	0.24 0.24	E(0°) 4681 E(C90) 4.5° 2341 E(C0) 4.6° 2379
2.0	0.31 0.32	E(0°) 2633 E(C90) 4.5° 1317 E(C0) 4.6° 1338
2.5	0.39 0.40	E(0°) 1685 E(C90) 4.5° 843 E(C0) 4.6° 857
3.0	0.47 0.48	E(0°) 1170 E(C90) 4.5° 585 E(C0) 4.6° 595

— C0/C180 (Half-peak divergence: 9.2°)  
— C90/C270 (Half-peak divergence: 9.0°)

### COLOR VECTOR GRAPHIC





Suelo\_RX | Uplights | Accessories  
**80557M06**



Outer casing

installation position: floor, land; type of installation: masonry L=110mm, H=220mm,  
D=110mm.

Material:ABS Plastic, colour:black.

**Code**

98122