




Uplights | x powerLED 0 W DC - 9 W AC | CRI 80
80574N06

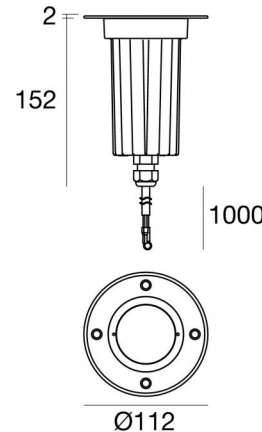

Technical data	
Type	Drive Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Ultra Spot
Light emission direction	upward
Nominal power	0 W DC
Total Power	9 W
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP68
Installation limitations	Not for underwater use
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	2500 Kg
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.780 Kg
Electrostatic discharge protection	Yes
Surge protection	4 KV
Optics technology	Honey comb - Set-back low glare optics
Product technological characteristics	Acquastop - TVS

Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	black
Processing	Open pore anodizing + Powder Coating

Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent

Finishing flange

Material	AISI 316L steel
Colour	steel
Processing	Brushing

Cables Electrification

Cable connector	No
-----------------	----



Suelo_RX Pro | Uplights | Accessories
80574N06



Outer casing
installation position: floor, land; type of installation: masonry L=110mm, H=220mm,
D=110mm.
Material:ABS Plastic, colour:black.

Code

98122