




Uplights | x powerLED 0 W DC 24 V | CRI 80
80579W30

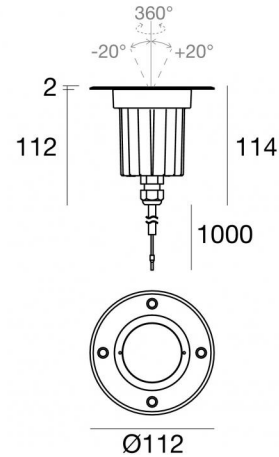

| Technical data | |
|--|------------------------|
| Type | Drive Over |
| Installation position | Floor |
| Installation environment | Outdoor |
| Light Source | LED |
| Circuit structure | powerLED |
| Optics | Medium Flood |
| Light emission direction | upward |
| Nominal power | 0 W DC |
| Input voltage range | 24 V |
| CCT / Tone | 3000 K |
| Colour rendering index | 80 Ra |
| C.C. / C.V. | CV |
| Safety class | 3 |
| IP | IP68 |
| Installation limitations | Not for underwater use |
| IK | IK10 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Driver included | No |
| C.V. - C.C. Converter | Converter 24V included |
| Dimmable article | DALI - 1-10V |
| Directional | No |
| Tilting | Yes |
| total angle (horizontal plane) | 360 ° |
| total angle (vertical plane) | 40 ° |
| Walk-over | Yes |
| Drive-over | 2500 Kg |
| Cable included | Yes |
| Cable length | 1 m |
| Resin potting | Yes |
| Type of light emission | Single emission |
| Net weight | 0.730 Kg |
| Electrostatic discharge protection | No |
| Surge protection | No |
| Product technological characteristics | Acquastop - TVS |

Finishing casing

| | |
|------------|--------------------------------------|
| Material | Die-cast Aluminium EN AB - 46100 |
| Colour | black |
| Processing | Open pore anodizing + Powder Coating |

Finishing diffuser

| | |
|----------|------------------------------|
| Material | Extra clear glass - Tempered |
| Colour | transparent |

Finishing flange

| | |
|------------|-----------------|
| Material | AISI 316L steel |
| Colour | steel |
| Processing | Brushing |

Cables Electrification

| | |
|-----------------|----|
| Cable connector | No |
|-----------------|----|



Suelo_RXJ | Uplights | Accessories
80579W30



Outer casing
installation position: floor, land; type of installation: masonry L=110mm, H=155mm,
D=110mm.
Material:ABS Plastic, colour:black.

Code

98121