




Uplights | x powerLED 0 W DC - 9 W AC | CRI 80
80580N60

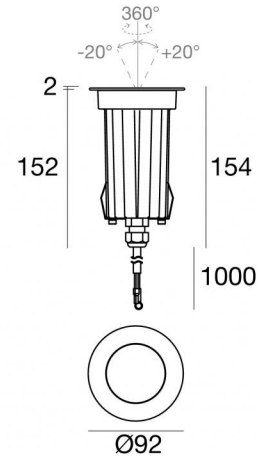

| Technical data | |
|--|------------------------|
| Type | Drive Over |
| Installation position | Floor |
| Installation environment | Outdoor |
| Light Source | LED |
| Circuit structure | powerLED |
| Optics | Wide Flood |
| Light emission direction | upward |
| Nominal power | 0 W DC |
| Total Power | 9 W |
| Nominal input voltage | 220 - 240 V AC |
| Input voltage range | 198 - 264 V AC |
| CCT / Tone | 4000 K |
| Colour rendering index | 80 Ra |
| C.C. / C.V. | AC |
| Safety class | 1 |
| IP | IP68 |
| Installation limitations | Not for underwater use |
| IK | IK10 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Driver included | Driver |
| Dimmable article | No |
| Directional | No |
| Tilting | Yes |
| total angle (horizontal plane) | 360 ° |
| total angle (vertical plane) | 40 ° |
| Walk-over | Yes |
| Drive-over | 2500 Kg |
| Cable included | Yes |
| Cable length | 1 m |
| Resin potting | Yes |
| Type of light emission | Single emission |
| Net weight | 0.750 Kg |
| Electrostatic discharge protection | Yes |
| Surge protection | 4 KV |
| Product technological characteristics | TVS |

Finishing casing

| | |
|------------|--------------------------------------|
| Material | Die-cast Aluminium EN AB - 46100 |
| Colour | black |
| Processing | Open pore anodizing + Powder Coating |

Finishing diffuser

| | |
|----------|------------------------------|
| Material | Extra clear glass - Tempered |
| Colour | transparent |

Finishing flange

| | |
|------------|-----------------|
| Material | AISI 316L steel |
| Colour | steel |
| Processing | Brushing |

Cables Electrification

| | |
|-----------------|----|
| Cable connector | No |
|-----------------|----|



Suelo_RJ | Uplights | Accessories
80580N60



Outer casing
installation position: floor, land; type of installation: masonry L=85mm, H=220mm,
D=85mm.
Material:ABS, colour:Black.

Code

99681