


Downlights | 1 x powerLED 10 W DC 800 mA | CRI 92
80596M15



Ø64

Technical data	
Type	Semi-recessed
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	powerLED
Optics	Spot
Light emission direction	downward
Nominal power	10 W DC
Source lumens	960 lm
Input voltage range	800mA
CCT / Tone	2700 K
Colour rendering index	92 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP44
Optical compartment IP	IP65
IK	IK05
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	0.187 Kg
Electrostatic discharge protection	No
Surge protection	No
Optics technology	F.O.L.
Product technological characteristics	TVS

Finishing casing

Material	UV Resistant Polycarbonate
Colour	Black
Processing	Liquid painting

Finishing diffuser

Material	UV Resistant Polycarbonate
Colour	transparent

Finishing radiator

Material	Die-cast Aluminium EN AB - 46100
Processing	Tumbling

Electronics



99135
On/Off Driver 198~264V AC (2 - 3 art.)



99345
DALI - Push and Simply Dim Multi Power 198~264V AC / 176~275V DC (1 - 3 art.)



99735
Multi Power 198~264V AC / 180~275V DC (1 art.)



99733
1-10V Multi Power 198~264V AC / 180~275V DC (1 art.)



C-E100013
Push and Simply Dim - DALI-2 Controller (1 art.)

Downlights | 1 x powerLED 10 W DC 800 mA | CRI 92 | Base 80596M15


Single emission recessed downlights for indoor application. The super warm white LED light source with a spot light distribution is composed of 1 powerLED LEDs with CCT of 2700 K and a CRI 92; the source luminous flux is 960 lm, with a 96.0 lm/W nominal luminous efficacy.

The device body is made of uv resistant polycarbonate and features a black finish, processed by means of liquid painting; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP44; the total weight is of 0.187 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 10 W.

The device features protection class III and can be ceiling-mounted with an outer casing, code 98534(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

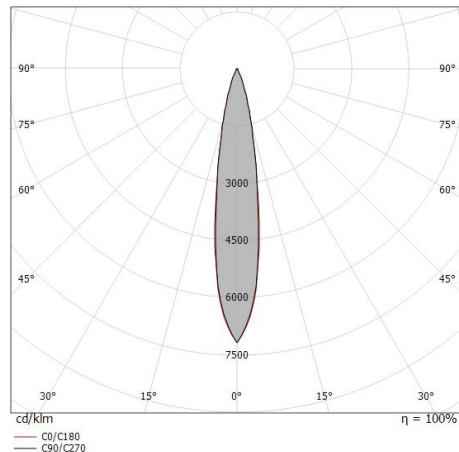

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.15 0.16	E(0°) 15696 E(C90) 8.8° 7665 E(C0) 8.9° 7612
1.0	0.31 0.31	E(0°) 3924 E(C90) 8.8° 1916 E(C0) 8.9° 1903
1.5	0.46 0.47	E(0°) 1744 E(C90) 8.8° 852 E(C0) 8.9° 846
2.0	0.62 0.63	E(0°) 981 E(C90) 8.8° 479 E(C0) 8.9° 476
2.5	0.77 0.78	E(0°) 628 E(C90) 8.8° 307 E(C0) 8.9° 304
3.0	0.93 0.94	E(0°) 436 E(C90) 8.8° 213 E(C0) 8.9° 211

— C0/C180 (Half-peak divergence: 17.8°)
— C90/C270 (Half-peak divergence: 17.6°)

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features

Light Output Ratio (LOR)	56 %
Source lumens	960 lm
Delivered lumens	546 lm
Consumption	10 W
Luminaire efficacy	54 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	92 Ra
Black Body Locus	On
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio


L70 B10 C0 247450h (at Tj 60 Ta 25)

UGR

UGR axial	13.4
UGR transversal	13.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20


OPTICAL

C0/C180 optics	18°
Light distribution simmetry	Symmetrical

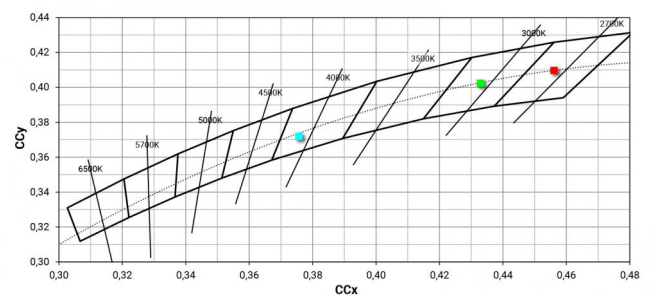



80596M15



Outer casing - Frameless outer-casing

installation position: ceiling; type of installation: drywall L=73.5mm, H=42mm, D=73.5mm.


Material:ABS + glass fiber 15%, colour:white, processing:raw.

Finish

White

Code

98499



Outer casing - outer casing

installation position: ceiling; type of installation: drywall L=84mm, H=42mm, D=84mm.

Material:Aluminium, colour:Black, processing:Coating.

Finish

Black

Code

98534