




Downlights | x powerLED 0 W DC 700 mA | CRI 90
81123W45

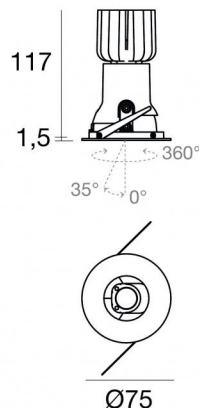


Technical data	
Type	Encasement with flange
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	powerLED
Optics	Medium Wide Flood
Light emission direction	downward
Nominal power	0 W DC
Input voltage range	700mA
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP44
Optical compartment IP	IP65
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	Yes
total angle (horizontal plane)	360 °
total angle (vertical plane)	35 °
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.170 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.277 Kg
Electrostatic discharge protection	No
Surge protection	No
Optics technology	Honey comb
Product technological characteristics	TVS

Finishing casing	
Material	Die-cast Aluminium EN AB - 46100
Colour	black
Processing	Powder coating
Finishing diffuser	
Material	UV Resistant Polycarbonate
Colour	transparent
Finishing flange	
Material	Die-cast Aluminium EN AB - 46100
Colour	Black
Processing	Powder coating
Finishing radiator	
Material	Die-cast Aluminium EN AB - 46100
Colour	Aluminium
Processing	Polishing
Cables Electrification	
Cable connector	No




Vos_RJ | Downlights | Accessories
81123W45

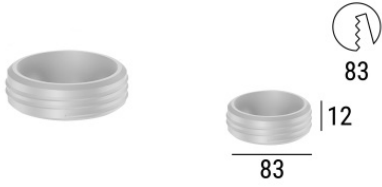

Outer casing

installation position: ceiling; type of installation: drywall L=83mm, H=12mm, D=83mm.
Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.

Finish	Code
	83064