





Uplights | 1 x powerLED 3 W DC 24 V | CRI 80  
81214M00



Technical data	
Type	Walk Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Diffused
Light emission direction	upward
Nominal power	3 W DC
Source lumens	249 lm
Input voltage range	24 V
CCT / Tone	2700 K
Colour rendering index	80 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP68
Installation limitations	Not for underwater use
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
C.V. - C.C. Converter	Converter 24V included
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.5 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	Acquastop - TVS

#### Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	black
Processing	Open pore anodizing + Powder Coating

#### Finishing flange

Material	AISI 316L steel
Colour	steel
Processing	Brushing

#### Electronics



89488  
On/Off Driver 190~250V AC / 180~275V DC 15 W (1 - 4 art.)



89179  
On/Off Driver 198~264V AC 24 W (1 - 8 art.)



89359  
On/Off Driver 198~264V AC / 180~275V DC 48 W (1 - 16 art.)



99331  
On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 50 art.)



99660  
DALI - 1-10V Controller 24V DC 216 W (- art.)



83042  
1-10V - Push and Simply Dim - DALI-2 Controller (- art.)



## Uplights | 1 x powerLED 3 W DC 24 V | CRI 80 | Base 81214M00


Single emission uplights for outdoor application. The super warm white LED light source with a diffused light distribution is composed of 1 powered LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 249 lm, with a 83.0 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating. The ingress protection degree is IP68; the total weight is of 0.5 kg.

The total absorbed power is 3 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 99651 (for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

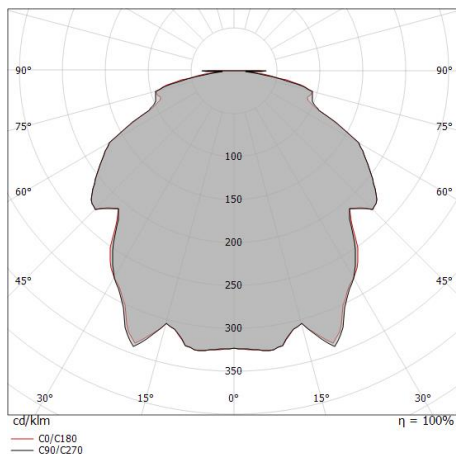

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.68 1.70	E(0°) 32 E(C90) 2 E(C0) 2
1.0	3.36 3.41	E(0°) 8 E(C90) 1 E(C0) 1
1.5	5.03 5.11	E(0°) 4 E(C90) 0 E(C0) 0
2.0	6.71 6.82	E(0°) 2 E(C90) 0 E(C0) 0
2.5	8.39 8.52	E(0°) 1 E(C90) 0 E(C0) 0
3.0	10.07 10.23	E(0°) 1 E(C90) 0 E(C0) 0

Distance [m]      Cone diameter [m]      illuminance [lx]

— C0/C180 (Half-peak divergence: 119.2°)  
— C90/C270 (Half-peak divergence: 118.4°)

### Energy efficiency class

This product contains a light source of energy efficiency class D.

### Illuminotechnical Features

Light Output Ratio (LOR)	10 %
Source lumens	249 lm
Delivered lumens	25 lm
Consumption	2.5 W
Luminaire efficacy	12 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	1.5 Step
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio

L70 B10 C0 361980h (at Tj 60 Ta 25 )

### UGR


UGR axial	20.6
UGR transversal	20.8
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	118°
Light distribution simmetry	Symmetrical



Orma\_IL | Uplights | Accessories  
**81214M00**



Outer casing

installation position: floor, land; type of installation: masonry L=114mm, H=76mm,  
D=114mm.

Material:ABS Plastic, colour:black.

**Code**

99651



Tool - Suction cup for product extraction

Material:plastic, colour:orange, processing:Coating.

**Code**

83235