



Uplights | 1 x powerLED 5 W DC 24 V | CRI 80
81222N00

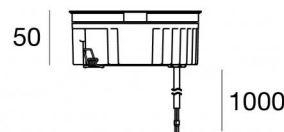

Ø125

Technical data	
Type	Walk Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Diffused
Light emission direction	upward
Nominal power	5 W DC
Source lumens	529 lm
Input voltage range	24 V
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP68
Installation limitations	Not for underwater use
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
C.V. - C.C. Converter	Converter 24V included
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.9 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	Acquastop - TVS

Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	black
Processing	Open pore anodizing + Powder Coating

Finishing diffuser

Material	Glass - Tempered
Colour	Opal white
Processing	Anti-slip painting

Finishing flange

Material	AISI 316L steel
Colour	steel
Processing	Brushing

Electronics



89488
On/Off Driver 190~250V AC / 180~275V DC 15 W (1 - 3 art.)



89179
On/Off Driver 198~264V AC 24 W (1 - 4 art.)



89359
On/Off Driver 198~264V AC / 180~275V DC 48 W (1 - 9 art.)



99331
On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 30 art.)



99660
DALI - 1-10V Controller 24V DC 216 W (- art.)



C-E500023
DALI - 1-10V - Push and Simply Dim Controller 8~53V DC 576 W (- art.)

Cables Electrification

Cable connector No



Uplights | 1 x powerLED 5 W DC 24 V | CRI 80 | Base 81222N00

Single emission uplights for outdoor application. The natural white LED light source with a diffused light distribution is composed of 1 powered LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 529 lm, with a 105.8 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of glass - tempered with a anti-slip painting treatment. The ingress protection degree is IP68; the total weight is of 0.9 kg.

The total absorbed power is 5 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 99857(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	18 %
Source lumens	529 lm
Delivered lumens	97 lm
Consumption	5 W
Luminaire efficacy	19 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio


L70 B10 C0 247450h (at Tj 60 Ta 25)

UGR

UGR axial	22.4
UGR transversal	22.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	116°
Light distribution simmetry	Symmetrical

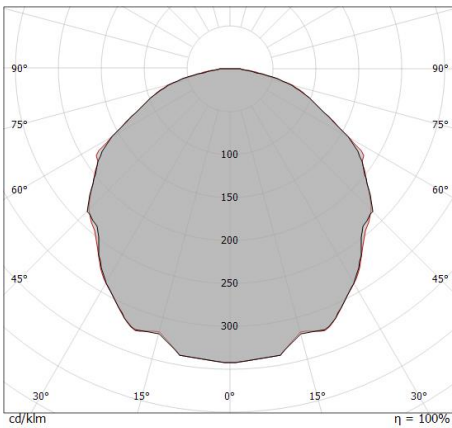

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.59 1.65	E(0°) 133 E(C90) 10 E(C0) 9
1.0	3.19 3.30	E(0°) 33 E(C90) 3 E(C0) 2
1.5	4.78 4.95	E(0°) 15 E(C90) 1 E(C0) 1
2.0	6.38 6.60	E(0°) 8 E(C90) 1 E(C0) 1
2.5	7.97 8.26	E(0°) 5 E(C90) 0 E(C0) 0
3.0	9.56 9.91	E(0°) 4 E(C90) 0 E(C0) 0

— C0/C180 (Half-peak divergence: 117.6°)
- - C90/C270 (Half-peak divergence: 115.8°)



		<p>Outer casing installation position: floor, land; type of installation: masonry L=105mm, H=76mm, D=105mm. Material:AISI 316 steel, colour:steel.</p>	<p>Finish Code 99564</p>
		<p>Outer casing installation position: floor, land; type of installation: masonry L=154mm, H=76mm, D=154mm. Material:ABS Plastic, colour:black.</p>	<p>Code 99652</p>
		<p>Outer casing installation position: floor, land; type of installation: masonry L=146mm, H=76mm, D=146mm. Material:AISI 316 steel, colour:steel.</p>	<p>Finish Code 99857</p>
		<p>Tool - Suction cup for product extraction Material:plastic, colour:orange, processing:Coating.</p>	<p>Code 83235</p>