




Ceiling Downlights | 198-264 V
1 arrayLED 34 W DC - 39 W AC | CRI 80
81373N30

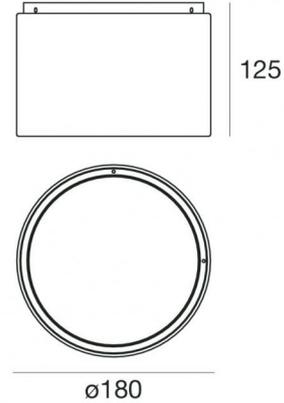

Technical data	
Type	Surface
Installation position	Ceiling
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Flood
Light emission direction	downward
Nominal power	34 W DC
Total Power	39 W
Source lumens	5342 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP65
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	2.8 Kg
Electrostatic discharge protection	Yes
Surge protection	5 KV
Optics technology	Set-back low glare optics

Finishing casing	
Material	Die-cast Aluminium EN AB - 46100
Colour	Grey
Processing	Open pore anodizing + Powder Coating
Finishing diffuser	
Material	Extra clear glass
Colour	transparent
Processing	Silk-screening



Ceiling Downlights | 198-264 V | 1 arrayLED 34 W DC - 39 W AC | CRI 80 | Base 81373N30

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	68 %
Source lumens	5342 lm
Delivered lumens	3678 lm
Consumption	39 W
Luminaire efficacy	94 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR

UGR axial	12.3
UGR transversal	12.3
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	26°
Light distribution simmetry	Symmetrical


Single emission ceiling downlights for outdoor application. The natural white LED light source with a flood light distribution is composed of 1 arrayed LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 5342 lm, with a 157.1 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a grey finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass with a silk-screening treatment. The ingress protection degree is IP65; the total weight is of 2.8 kg.

The total absorbed power is 39 W.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

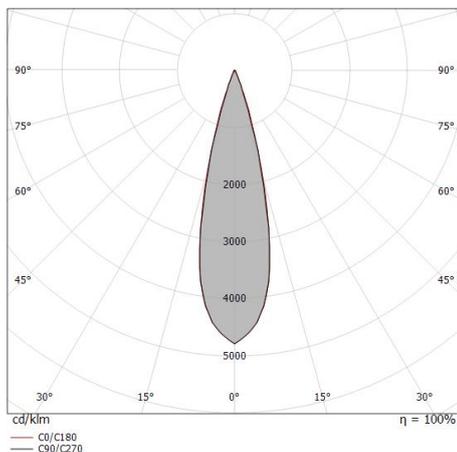

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.23 0.23	E(0°) 70436 E(C90) 13.1° 32940 E(C0) 13.2° 32815
1.0	0.47 0.47	E(0°) 17609 E(C90) 13.1° 8235 E(C0) 13.2° 8204
1.5	0.70 0.70	E(0°) 7826 E(C90) 13.1° 3660 E(C0) 13.2° 3646
2.0	0.93 0.94	E(0°) 4402 E(C90) 13.1° 2059 E(C0) 13.2° 2051
2.5	1.16 1.17	E(0°) 2817 E(C90) 13.1° 1318 E(C0) 13.2° 1313
3.0	1.40 1.41	E(0°) 1957 E(C90) 13.1° 915 E(C0) 13.2° 912

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 26.4°)
— C90/C270 (Half-peak divergence: 26.2°)