



# Vedette\_Q Asymm Double emission

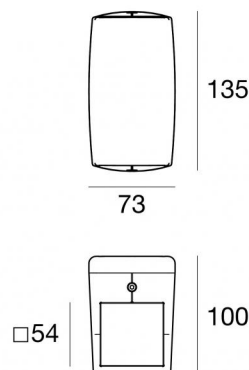

Wall Lights | 198-264 V  
4 arrayLED 13.5 W DC - 16.5 W AC | CRI 80

81579M64



| Technical data                                 |                         |
|------------------------------------------------|-------------------------|
| Type                                           | Surface                 |
| Installation position                          | Wall lights             |
| Installation environment                       | Outdoor                 |
| Light Source                                   | LED                     |
| Circuit structure                              | arrayLED                |
| Optics                                         | Asymmetric + Wide Flood |
| Light emission direction                       | downward and upward     |
| Nominal power                                  | 13.5 W DC               |
| Total Power                                    | 16.5 W                  |
| Source lumens                                  | 1324 lm                 |
| Nominal input voltage                          | 220 - 240 V AC          |
| Input voltage range                            | 198 - 264 V AC          |
| Frequency                                      | 50 - 60 Hz              |
| CCT / Tone                                     | 2700 K                  |
| Colour rendering index                         | 80 Ra                   |
| C.C. / C.V.                                    | AC                      |
| Safety class                                   | 1                       |
| IP                                             | IP65                    |
| IK                                             | IK07                    |
| Glow wire test                                 | 850°                    |
| Direct mounting on normally flammable surfaces | Yes                     |
| CE                                             | Yes                     |
| Driver included                                | Driver                  |
| Dimmable article                               | No                      |
| Directional                                    | No                      |
| Tilting                                        | No                      |
| Walk-over                                      | No                      |
| Drive-over                                     | No                      |
| Cable included                                 | Yes                     |
| Cable length                                   | 1 m                     |
| Resin potting                                  | No                      |
| Type of light emission                         | Double emission         |
| Net weight                                     | 2.02 Kg                 |
| Electrostatic discharge protection             | 4 KV                    |
| Surge protection                               | 4 KV                    |
| Product technological characteristics          | Acquastop - TVS         |

## Finishing casing

|            |                                      |
|------------|--------------------------------------|
| Material   | Die-cast Aluminium EN AB - 46100     |
| Colour     | Black                                |
| Processing | Open pore anodizing + Powder Coating |

## Finishing diffuser

|            |                              |
|------------|------------------------------|
| Material   | Extra clear glass - Tempered |
| Colour     | transparent                  |
| Processing | Silk-screening               |

## Cables Electrification

|                 |    |
|-----------------|----|
| Cable connector | No |
|-----------------|----|

# Vedette\_Q Asymm Double emission



Wall Lights | 198-264 V | 4 arrayLED 13.5 W DC - 16.5 W AC | CRI 80 | Base  
81579M64


Double emission wall lights for outdoor application. The super warm white LED light source with a asymmetric + wide flood light distribution is composed of 4 arrayed LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 1324 lm, with a 98.1 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP65; the total weight is of 2.02 kg.

The total absorbed power is 16.5 W. The power supply cable is included and features a 1 m length.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

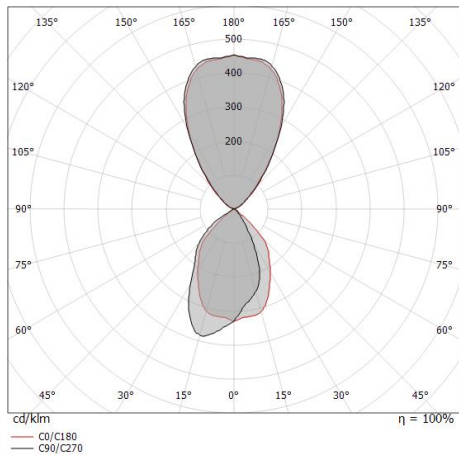

## Energy efficiency class

This product contains 2 light sources of energy efficiency class F.

## Illuminotechnical Features

|                                       |                |
|---------------------------------------|----------------|
| Light Output Ratio (LOR)              | 92 %           |
| Source lumens                         | 1324 lm        |
| Delivered lumens                      | 1219 lm        |
| Consumption                           | 16.5 W         |
| Luminaire efficacy                    | 73 lm/W        |
| Colour temperature                    | 2700 K         |
| Standard Deviation of Colour Matching | 2 Step MacAdam |
| Colour rendering index                | 80 Ra          |
| Black Body Locus                      | On             |

## Standard Operating Ambient Temperature

-20 / +50°C

## Ordinary temperature on the glass

40°C

## LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25 )

## OPTICAL

C0/C180 optics 76°

Light distribution symmetry Asymmetrical

