




Lines | 110-240 V AC /176-280 V DC  
27 x powerLED 59 W DC - 65 W AC | CRI 80  
**81590N27**

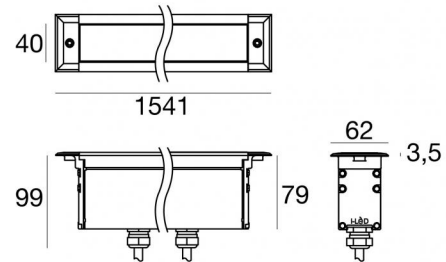

Technical data	
Type	Frame
Installation position	Wall lights - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Asymmetric Wallwasher
Light emission direction	upward
Nominal power	59 W DC
Total Power	65 W
Source lumens	8181 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	110 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP67
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Net weight	7 Kg
Electrostatic discharge protection	4 KV
Surge protection	5 KV
Product technological characteristics	Acquastop - TVS

### Finishing casing

Material	Aluminium 6060
Colour	Anodised Aluminum
Processing	20 µm anodizing

### Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

### Cables Electrification

Cable connector	Female Socket 3 Pin
IP (locked condition)	68
Cable connector	Male Plug 3 pin

The driver contained in the device complies with IEC 61347-2-13 annex J, and can therefore be powered by centralized power systems.



Lines | 110-240 V AC /176-280 V DC | 27 x powerLED 59 W DC - 65 W AC | CRI 80 | Base  
**81590N27**

Single emission lines for outdoor application. The natural white LED light source with a asymmetric wallwasher light distribution is composed of 27 powered LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 8181 lm, with a 138.7 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised aluminum finish, processed by means of 20 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 7 kg.

The total absorbed power is 65 W. The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be wall lights or floor-mounted with an outer casing, code 99760(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains 6 light sources of energy efficiency class D.


### Illuminotecnical Features

Light Output Ratio (LOR)	67 %
Source lumens	8181 lm
Delivered lumens	5521 lm
Consumption	65 W
Luminaire efficacy	84 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	1.5 Step
Colour rendering index	80 Ra


Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C


### LED Life / Failure Ratio



L70 B10 C0 361980h (at Tj 60 Ta 25 )


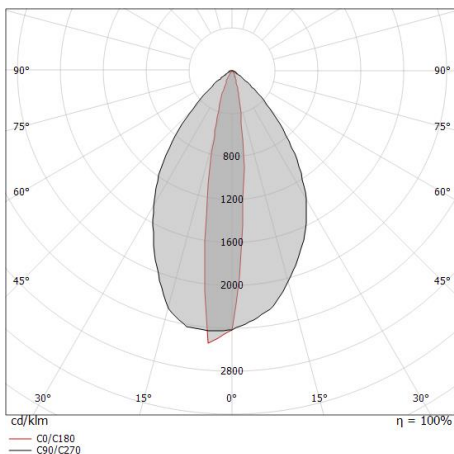




	<p>Cable and connector Length 2000 mm; insulation double; section 1.5 mm<sup>2</sup>; cable gland: no; external diameter: 9.5 mm; colors: blue - brown - yellow-green.</p>	<p><b>Code</b> <u>99057</u></p>
--	--	-------------------------------------

	<p>Cable and connector Length 5000 mm; insulation double; section 1.5 mm<sup>2</sup>; cable gland: no; external diameter: 9.5 mm; colors: blue - brown - yellow-green.</p>	<p><b>Code</b> <u>98147</u></p>
--	--	-------------------------------------

		<p>Cable and connector Length 10000 mm; insulation double; section 1.5 mm<sup>2</sup>; cable gland: no; external diameter: 9.5 mm; colors: blue - brown - yellow-green.</p>	<p><b>Code</b> <u>98146</u></p>
---	---	---	-------------------------------------

		<p>Outer casing installation position: wall lights, floor; type of installation: masonry L=1536mm, H=138.3mm, D=100.2mm. Material:Iron, colour:zinc, processing:Galvanising.</p>	<p><b>Finish</b> Grey</p> <p><b>Code</b> <u>99760</u></p>
--	---	--	---