


Archiline_F Anti-glare



Lines | x powerLED 0 W DC - 20.5 W AC | CRI 80
81595N30

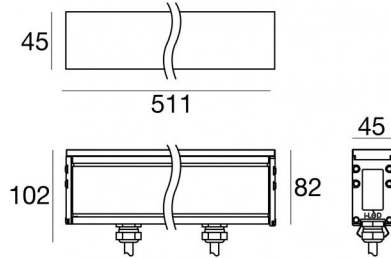

Technical data	
Type	Frameless
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	30°
Light emission direction	upward
Nominal power	0 W DC
Total Power	20.5 W
Nominal input voltage	220 - 240 V AC
Input voltage range	220 - 240 V AC
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP67
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	5000 Kg
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Net weight	2.8 Kg
Electrostatic discharge protection	4 KV
Surge protection	6 KV
Optics technology	Dark light
Product technological characteristics	Acquastop - TVS

Finishing casing

Material	Aluminium 6060
Colour	Anodised Black
Processing	15 µm Anodizing

Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

Cables Electrification+signal

Cable connector	Female Socket 5 Pin
IP (locked condition)	68
Cable connector	Male Plug 5 Pin

Archiline_F Anti-glare



Archiline_F Anti-glare | Lines | Accessories
81595N30

		<p>Outer casing installation position: floor; type of installation: masonry L=511mm, H=140mm, D=75mm Material:Aluminium 6060, colour:Anodised Black, processing:15 µm Anodizing.</p>	Finish 	Code 98725
		<p>Key</p>		Code 98957
		<p>Cable and connector Length 5000 mm.</p>		Code 99822
		<p>Cable and connector Length 1000 mm.</p>		Code 99823
		<p>Cable and connector Length 5000 mm.</p>		Code 99824
		<p>Cable and connector Length 10000 mm.</p>		Code 99825
		<p>Cable and connector Length 1000 mm.</p>		Code 99826