




Lines | 220-240 V  
9 x powerLED 18.3 W DC - 20.5 W AC | CRI 80  
**81598N25**

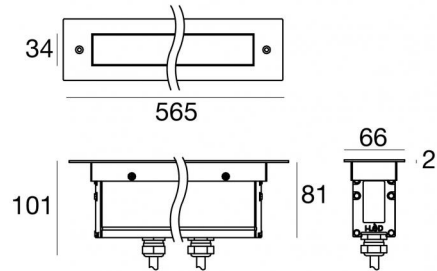

Technical data	
Type	Frame
Installation position	Wall lights - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Elliptical
Light emission direction	upward
Nominal power	18.3 W DC
Total Power	20.5 W
Source lumens	2898 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP67
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Net weight	2.8 Kg
Electrostatic discharge protection	4 KV
Surge protection	6 KV
Product technological characteristics	Acquastop - TVS

### Finishing casing

Material	Aluminium 6060
Colour	Anodised Black
Processing	15 µm Anodizing

### Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

### Finishing flange

Material	AISI 316 steel
Colour	steel
Processing	Brushing



Lines | 220-240 V | 9 x powerLED 18.3 W DC - 20.5 W AC | CRI 80 | Base 81598N25

Energy efficiency class	
This product contains 2 light sources of energy efficiency class D.	

Illuminotechnical Features	
Light Output Ratio (LOR)	58 %
Source lumens	2898 lm
Delivered lumens	1689 lm
Consumption	20.5 W
Luminaire efficacy	82 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	1.5 Step
Colour rendering index	80 Ra

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio	
L70 B10 C0 361980h (at Tj 60 Ta 25 )	

UGR	
UGR axial	19
UGR transversal	6.1
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
C90/C270 optics	46°
C0/C180 optics	22°
Light distribution simmetry	Symmetrical 2 assis



Single emission lines for outdoor application. The natural white LED light source with a elliptical light distribution is composed of 9 powered LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 2898 lm, with a 158.4 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised black finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 2.8 kg.

The total absorbed power is 20.5 W. The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be wall lights or floor-mounted with an outer casing, code 98672(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

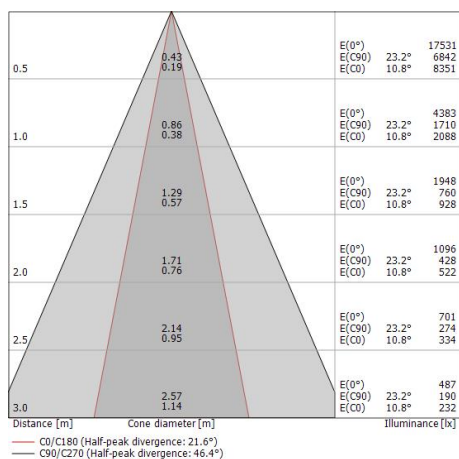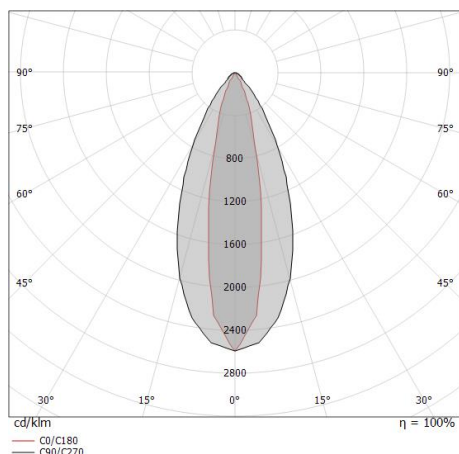



		<p>Outer casing                      installation position: wall lights, floor; type of installation: masonry L=546mm, H=138.3mm,                      D=100.2mm.                      Material:Iron, colour:zinc, processing:Galvanising.</p>	<p><b>Finish</b>                      Grey</p>	<p><b>Code</b>                      98672</p>
		<p>Cable and connector                      Length 5000 mm.</p>		<p><b>Code</b>                      99822</p>
		<p>Cable and connector                      Length 1000 mm.</p>		<p><b>Code</b>                      99823</p>
		<p>Cable and connector                      Length 5000 mm.</p>		<p><b>Code</b>                      99824</p>
		<p>Cable and connector                      Length 10000 mm.</p>		<p><b>Code</b>                      99825</p>
		<p>Cable and connector                      Length 1000 mm.</p>		<p><b>Code</b>                      99826</p>