




Lines | x powerLEDs 0 W DC - 41 W AC | CRI 80  
81605M25

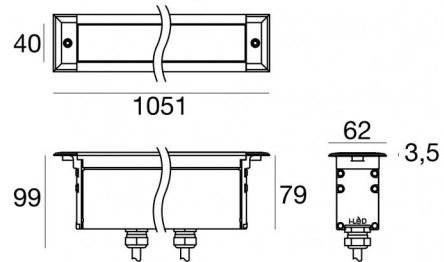

Technical data	
Type	Frame
Installation position	Wall lights - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLEDs
Optics	Elliptical
Light emission direction	upward
Nominal power	0 W DC
Total Power	41 W
Nominal input voltage	220 - 240 V AC
Input voltage range	220 - 240 V AC
CCT / Tone	2700 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP67
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Net weight	4.8 Kg
Electrostatic discharge protection	4 KV
Surge protection	5 KV
Product technological characteristics	Acquastop - TVS

### Finishing casing

Material	Aluminium 6060
Colour	Anodised Aluminum
Processing	20 µm anodizing

### Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

### Cables Electrification+signal

Cable connector	Female Socket 5 Pin
IP (locked condition)	68
Cable connector	Male Plug 5 Pin



## 81605M25

		<p>Outer casing          installation position: wall lights, floor; type of installation: masonry L=1036mm, H=138.3mm, D=100.2mm.          Material:Iron, colour:zinc, processing:Galvanising.</p>	<p><b>Finish</b>          Grey</p>	<p><b>Code</b>          98673</p>
		<p>Cable and connector          Length 5000 mm.</p>		<p><b>Code</b>          99822</p>
		<p>Cable and connector          Length 1000 mm.</p>		<p><b>Code</b>          99823</p>
		<p>Cable and connector          Length 5000 mm.</p>		<p><b>Code</b>          99824</p>
		<p>Cable and connector          Length 10000 mm.</p>		<p><b>Code</b>          99825</p>
		<p>Cable and connector          Length 1000 mm.</p>		<p><b>Code</b>          99826</p>