




Lines | x powerLED 0 W DC - 41 W AC | CRI 80
81605N25





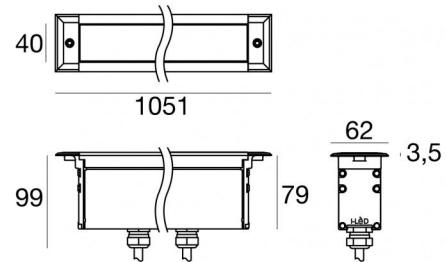



Technical data	
Type	Frame
Installation position	Wall lights - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Elliptical
Light emission direction	upward
Nominal power	0 W DC
Total Power	41 W
Nominal input voltage	220 - 240 V AC
Input voltage range	220 - 240 V AC
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP67
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Net weight	4.8 Kg
Electrostatic discharge protection	4 KV
Surge protection	5 KV
Product technological characteristics	Acquastop - TVS

Finishing casing	
Material	Aluminium 6060
Colour	Anodised Aluminum
Processing	20 µm anodizing

Finishing diffuser	
Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

Cables Electrification+signal	
Cable connector	Female Socket 5 Pin
IP (locked condition)	68
Cable connector	Male Plug 5 Pin



	<p>Outer casing installation position: wall lights, floor; type of installation: masonry L=1036mm, H=138.3mm, D=100.2mm. Material:Iron, colour:zinc, processing:Galvanising.</p>	<p>Finish Grey</p> <p>Code 98673</p>
	<p>Cable and connector Length 5000 mm.</p>	<p>Code 99822</p>
	<p>Cable and connector Length 1000 mm.</p>	<p>Code 99823</p>
	<p>Cable and connector Length 5000 mm.</p>	<p>Code 99824</p>
	<p>Cable and connector Length 10000 mm.</p>	<p>Code 99825</p>
	<p>Cable and connector Length 1000 mm.</p>	<p>Code 99826</p>