







Downlights | 1 arrayLED 35 W DC 950 mA | CRI 90
81668W15



Technical data

Type	Encasement with flange
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	arrayLED
Optics	Spot
Light emission direction	frontal
Nominal power	35 W DC
Source lumens	5019 lm
Input voltage range	950mA
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	Extractable
total angle (vertical plane)	65 °
total angle (horizontal plane)	350 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.20 m
Resin potting	No
Type of light emission	Single emission
Net weight	1.1 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	Black
Processing	Powder coating

Finishing mounting frame

Material	Die-cast Aluminium EN AB - 46100
Colour	Black
Processing	Powder coating

Electronics



99239
On/Off Driver 198-264V AC



99345
DALI - Push and Simply Dim Multi Power 198-264V AC / 176-275V DC



83008
1-10V - Push and Simply Dim - DALI-2 Controller

Cables Electrification

Cable connector	No
-----------------	----

Downlights | 1 arrayLED 35 W DC 950 mA | CRI 90 | Base **81668W15**


Single emission recessed downlights for indoor application. The warm white LED light source with a spot light distribution is composed of 1 arrayed LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 5019 lm, with a 143.4 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of powder coating; the mounting frame is made of die-cast aluminium en ab - 46100, with a black finish, processed by means of powder coating. The ingress protection degree is IP20; the total weight is of 1.1 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 35 W. The power supply cable is included and features a 0.20 m length.

The device features protection class III and can be ceiling-mounted, with a 162 mm diameter hole (in plasterboard) with an outer casing, code 99479(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

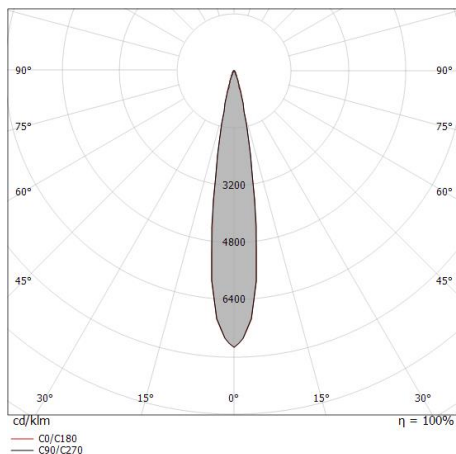

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.15 0.15	E(0°) 124290 E(C90) 8.7° 60538 E(C0) 8.6° 60758
1.0	0.31 0.30	E(0°) 31073 E(C90) 8.7° 15134 E(C0) 8.6° 15189
1.5	0.46 0.45	E(0°) 13810 E(C90) 8.7° 6726 E(C0) 8.6° 6751
2.0	0.61 0.60	E(0°) 7768 E(C90) 8.7° 3784 E(C0) 8.6° 3797
2.5	0.77 0.76	E(0°) 4972 E(C90) 8.7° 2422 E(C0) 8.6° 2430
3.0	0.92 0.91	E(0°) 3453 E(C90) 8.7° 1682 E(C0) 8.6° 1688

— C0/C180 (Half-peak divergence: 17.2°)
— C90/C270 (Half-peak divergence: 17.4°)

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	80 %
Source lumens	5019 lm
Delivered lumens	4016 lm
Consumption	35 W
Luminaire efficacy	114 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	90 Ra
Colour Rendering Index	60 R9
Black Body Locus	On
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR

UGR axial	23.6
UGR transversal	23.7
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	17°
Light distribution symmetry	Symmetrical

COLOR VECTOR GRAPHIC



Downlights | 1 arrayLED 35 W DC 950 mA | CRI 90 | Base 81668W15


Single emission recessed downlights for indoor application. The warm white LED light source with a spot light distribution is composed of 1 arrayed LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 5019 lm, with a 143.4 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of powder coating; the mounting frame is made of die-cast aluminium en ab - 46100, with a black finish, processed by means of powder coating. The ingress protection degree is IP20; the total weight is of 1.1 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 35 W. The power supply cable is included and features a 0.20 m length.

The device features protection class III and can be ceiling-mounted, with a 162 mm diameter hole (in plasterboard) with an outer casing, code 99479(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

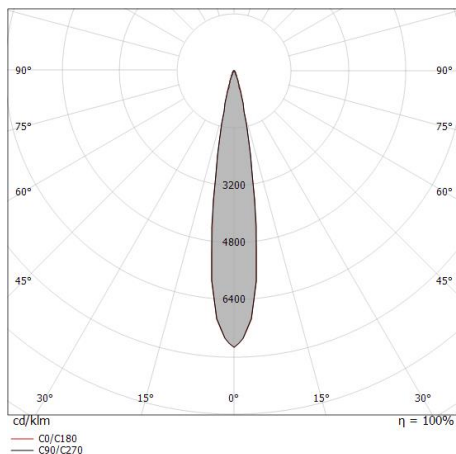

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.15 0.15	E(0°) 96076 E(C90) 8.7° 46796 E(C0) 8.6° 46966
1.0	0.31 0.30	E(0°) 24019 E(C90) 8.7° 11699 E(C0) 8.6° 11741
1.5	0.46 0.45	E(0°) 10675 E(C90) 8.7° 5200 E(C0) 8.6° 5218
2.0	0.61 0.60	E(0°) 6005 E(C90) 8.7° 2925 E(C0) 8.6° 2935
2.5	0.77 0.76	E(0°) 3843 E(C90) 8.7° 1872 E(C0) 8.6° 1879
3.0	0.92 0.91	E(0°) 2669 E(C90) 8.7° 1300 E(C0) 8.6° 1305

— C0/C180 (Half-peak divergence: 17.2°)
— C90/C270 (Half-peak divergence: 17.4°)

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	61 %
Source lumens	5019 lm
Delivered lumens	3104 lm
Consumption	25 W
Luminaire efficacy	124 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	90 Ra
Colour Rendering Index	60 R9
Black Body Locus	On
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25)



UGR

UGR axial	22.7
UGR transversal	22.8
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL


C0/C180 optics	17°
Light distribution symmetry	Symmetrical

COLOR VECTOR GRAPHIC

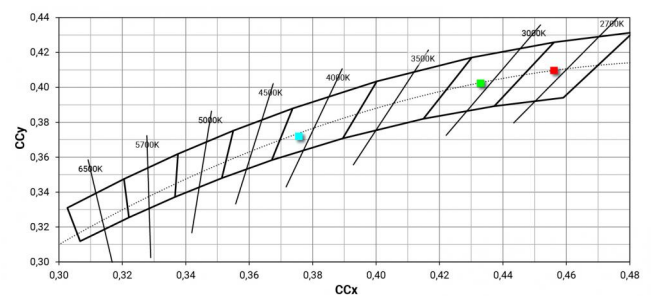



	<p>Optics - SPOT Light distribution: spot,Cover material: uv resistant polycarbonate</p>	<p>Code <u>C-U300015</u></p>
	<p>Optics - FLOOD Light distribution: flood,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate</p>	<p>Code <u>C-U300016</u></p>
	<p>Optics - WIDE FLOOD Light distribution: medium flood,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate</p>	<p>Code <u>C-U300017</u></p>
	<p>Anti-glare Anti-glare Type: honeycomb louvre. Material:Pom-C, colour:Black.</p>	<p>Code <u>C-U300014</u></p>
	<p>Optics Light distribution: adjustable,Cover material: ,aluminium</p>	<p>Code <u>C-U300034</u></p>
	<p>Diffuser - Not compatible with 60° optics</p>	<p>Code <u>C-U300013</u></p>
	<p>Anti-glare Anti-glare Type: 45° cylindrical screen. Material:Pom-C, colour:Black.</p>	<p>Code <u>C-U300030</u></p>
	<p>Anti-glare Anti-glare Type: cylindrical screen. Material:Pom-C, colour:Black.</p>	<p>Code <u>C-U300029</u></p>



Anti-glare
Anti-glare Type: cross louvres.
Material:Pom-C, colour:Black.

Code
C-U300031



Outer casing
L=154mm, H=99.6mm, D=150mm.
Material:PC, colour:black.

Finish **Code**
Black 99479