


# Suelo\_R RGBW



Uplights | 1 x powerLED 8 W DC 630 mA  
RGBW - 3000  
81717V45

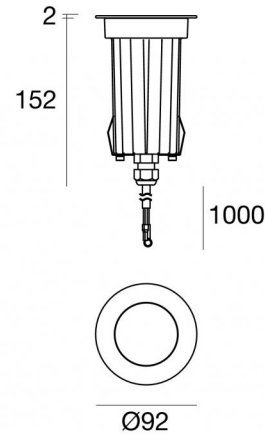

Technical data	
Type	Drive Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Medium Wide Flood
Light emission direction	upward
Nominal power	8 W DC
Input voltage range	630mA
CCT / Tone	RGBW - 3000 K
C.C. / C.V.	CC
Safety class	3
IP	IP68
Installation limitations	Not for underwater use
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	Yes
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	2500 Kg
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.750 Kg
Electrostatic discharge protection	No
Surge protection	No
Optics technology	F.O.L.
Product technological characteristics	Acquastop - TVS

## Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	black
Processing	Open pore anodizing + Powder Coating

## Finishing flange

Material	AISI 316L steel
Colour	steel
Processing	Brushing

## Electronics



C-E500011  
DMX-RDM - NFC Multi Channel 4ch. 19-50V DC

## Cables Electrification+signal

Cable connector	No
-----------------	----

## Lumen RGBW

N. Led	Red	Green	Blue	white
1	74 lm	121 lm	21 lm	122 lm



Uplights | 1 x powerLED 8 W DC 630 mA | RGBW - 3000  
**81717V45**

Single emission uplights for outdoor application. The RGBW - 3000 K LED light source with a medium wide flood light distribution is composed of 1 powered LEDs with CCT of RGB-W 3000 K.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating. The ingress protection degree is IP68; the total weight is of 0.750 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 8 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 99681 (for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

#### Energy efficiency class

This product contains a light source of energy efficiency class G.

Standard Operating Ambient Temperature	-20 / +50°C
--	-------------

Ordinary temperature on the glass	40°C
-----------------------------------	------

#### LED Life / Failure Ratio

L70 B10 C0 202460h (at Tj 60 Ta 25 )




Suelo\_R RGBW | Uplights | Accessories  
**81717V45**




Outer casing  
installation position: floor, land; type of installation: masonry L=85mm, H=220mm,  
D=85mm.  
Material:ABS, colour:Black.

**Code**  
99681



Dimmer  
RF Remote controller

**Code**  
C-E700003



RF remote control

**Code**  
C-W600001