


Suelo_RX RGBW



Uplights | 1 x powerLED 8 W DC 630 mA
 RGBW - 4000
81718Q06

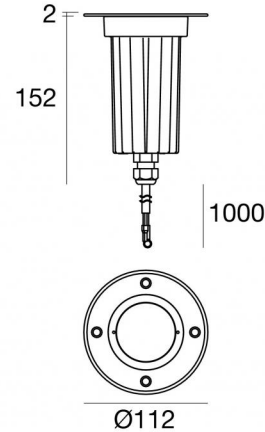

| Technical data | |
|--|------------------------|
| Type | Drive Over |
| Installation position | Floor |
| Installation environment | Outdoor |
| Light Source | LED |
| Circuit structure | powerLED |
| Optics | Ultra Spot |
| Light emission direction | upward |
| Nominal power | 8 W DC |
| Input voltage range | 630mA |
| CCT / Tone | RGBW - 4000 K |
| C.C. / C.V. | CC |
| Safety class | 3 |
| IP | IP68 |
| Installation limitations | Not for underwater use |
| IK | IK10 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Driver included | No |
| Dimmable article | Yes |
| Directional | No |
| Tilting | No |
| Walk-over | Yes |
| Drive-over | 2500 Kg |
| Cable included | Yes |
| Cable length | 1 m |
| Resin potting | Yes |
| Type of light emission | Single emission |
| Net weight | 0.700 Kg |
| Electrostatic discharge protection | No |
| Surge protection | No |
| Optics technology | F.O.L. |
| Product technological characteristics | Acquastop - TVS |

Finishing casing

| | |
|------------|--------------------------------------|
| Material | Die-cast Aluminium EN AB - 46100 |
| Colour | black |
| Processing | Open pore anodizing + Powder Coating |

Finishing flange

| | |
|------------|-----------------|
| Material | AISI 316L steel |
| Colour | steel |
| Processing | Brushing |

Electronics



C-E500011
 DMX-RDM - NFC Multi Channel 4ch. 19-50V DC (- art.)

Cables Electrification+signal

| | |
|-----------------|----|
| Cable connector | No |
|-----------------|----|

Lumen RGBW

| N. Led | Red | Green | Blue | white |
|--------|-------|--------|-------|--------|
| 1 | 74 lm | 121 lm | 21 lm | 153 lm |



Uplights | 1 x powerLED 8 W DC 630 mA | RGBW - 4000
81718Q06

Single emission uplights for outdoor application. The RGBW - 4000 K LED light source with a ultra spot light distribution is composed of 1 powered LEDs with CCT of RGB-W 4000 K.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating. The ingress protection degree is IP68; the total weight is of 0.700 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 8 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 98122(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class G.

| | |
|--|-------------|
| Standard Operating Ambient Temperature | -20 / +50°C |
|--|-------------|

| | |
|-----------------------------------|------|
| Ordinary temperature on the glass | 40°C |
|-----------------------------------|------|

LED Life / Failure Ratio

L70 B10 C0 202460h (at Tj 60 Ta 25)



Suelo_RX RGBW | Uplights | Accessories
81718Q06




Outer casing

installation position: floor, land; type of installation: masonry L=110mm, H=220mm, D=110mm.

Material:ABS Plastic, colour:black.

Code

98122




Dimmer

RF Remote controller

Code

C-E700003



RF remote control

Code

C-W600001