


Alux Pro



Ceiling Downlights | 198-264 V AC /170-280 V DC
16 topLED 35 W DC - 40 W AC | CRI 80
81774W60

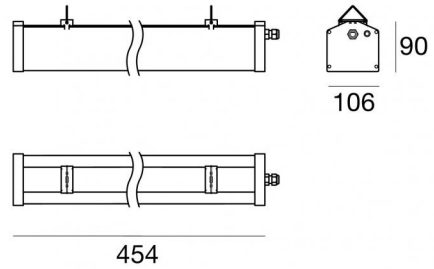

Technical data	
Type	Surface
Installation position	Ceiling
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Wide Flood
Light emission direction	downward
Nominal power	35 W DC
Total Power	40 W
Source lumens	5390 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP65
IK	IK06
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	No
Type of light emission	Single emission
Net weight	2 Kg
Electrostatic discharge protection	Yes
Surge protection	4 KV

Finishing casing

Material	Aluminium 6060
Colour	Anodised Aluminum
Processing	20 µm anodizing

Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening



Ceiling Downlights | 198-264 V AC /170-280 V DC | 16 topLED 35 W DC - 40 W AC | CRI 80

| Base
81774W60

Energy efficiency class

This product contains a light source of energy efficiency class D.

Illuminotechnical Features

Light Output Ratio (LOR)	91 %
Source lumens	5390 lm
Delivered lumens	4912 lm
Consumption	40 W
Luminaire efficacy	122 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C

LED Life / Failure Ratio

L70 B20 C10 108000h (at Tj 65 Ta 25)

UGR

UGR axial	21.5
UGR transversal	22.3
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	52°
Light distribution symmetry	Symmetrical


Single emission ceiling downlights for outdoor application. The warm white LED light source with a wide flood light distribution is composed of 16 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 5390 lm, with a 154.0 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised aluminum finish, processed by means of 20 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP65; the total weight is of 2 kg.

The total absorbed power is 40 W. The power supply cable is included and features a 1 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

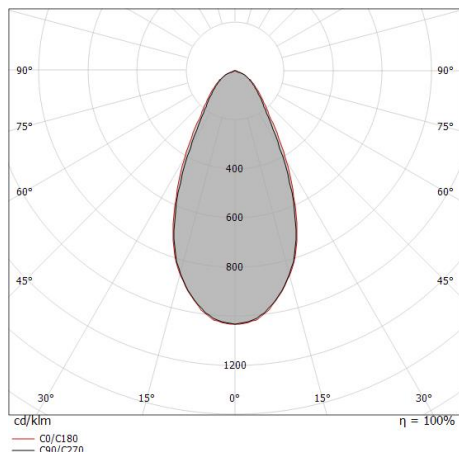

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.48 0.50	E(0°) 20302 E(C90) 25.8° 7413 E(C0) 26.5° 7318
1.0	0.97 1.00	E(0°) 5075 E(C90) 25.8° 1853 E(C0) 26.5° 1829
1.5	1.45 1.50	E(0°) 2256 E(C90) 25.8° 824 E(C0) 26.5° 813
2.0	1.93 1.98	E(0°) 1269 E(C90) 25.8° 463 E(C0) 26.5° 457
2.5	2.42 2.49	E(0°) 812 E(C90) 25.8° 297 E(C0) 26.5° 293
3.0	2.90 2.99	E(0°) 564 E(C90) 25.8° 206 E(C0) 26.5° 203

— C0/C180 (Half-peak divergence: 53.0°)
— C90/C270 (Half-peak divergence: 51.6°)



Connector

Type of cable power cable; ; insulation single; section 1 mm²; cable gland: yes; colors: blue - brown - yellow-green.

Code

99737



Cable

Type of cable power cable; Length 1000 mm; insulation single; section 1 mm²; cable gland: pg7; colors: blue - brown - yellow-green.

Code

84863