


Alux Pro



Ceiling Downlights | 220-240 V AC /260-360 V DC
16 topLED 35 W DC - 40 W AC | CRI 80
81775W00

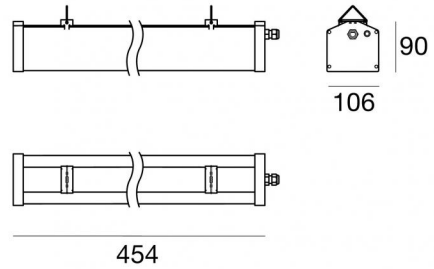

Technical data	
Type	Surface
Installation position	Ceiling
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward
Nominal power	35 W DC
Total Power	40 W
Source lumens	5390 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP65
IK	IK06
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	No
Type of light emission	Single emission
Net weight	2 Kg
Electrostatic discharge protection	Yes
Surge protection	4 KV

Finishing casing	
Material	Aluminium 6060
Colour	Anodised Aluminum
Processing	20 µm anodizing
Finishing diffuser	
Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening



Ceiling Downlights | 220-240 V AC /260-360 V DC | 16 topLED 35 W DC - 40 W AC | CRI 80

| Base
81775W00

Energy efficiency class

This product contains a light source of energy efficiency class D.

Illuminotechnical Features

Light Output Ratio (LOR)	67 %
Source lumens	5390 lm
Delivered lumens	3658 lm
Consumption	40 W
Luminaire efficacy	91 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C

LED Life / Failure Ratio

L70 B20 C10 108000h (at Tj 65 Ta 25)

UGR

UGR axial	27.4
UGR transversal	28
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C90/C270 optics	102°
C0/C180 optics	107°
Light distribution simmetry	Symmetrical 2 assis


Single emission ceiling downlights for outdoor application. The warm white LED light source with a diffused light distribution is composed of 16 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 5390 lm, with a 154.0 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised aluminum finish, processed by means of 20 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP65; the total weight is of 2 kg.

The total absorbed power is 40 W. The power supply cable is included and features a 1 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

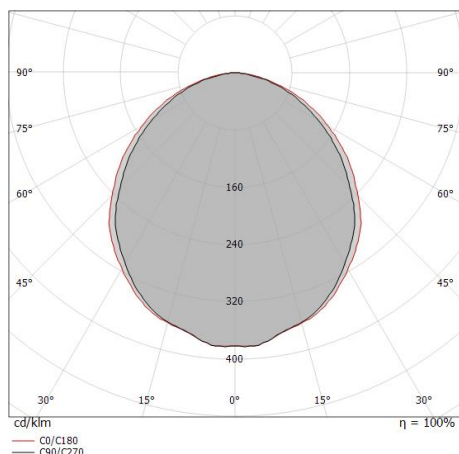

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.23 1.36	E(0°) 5589 E(C90) 51.0° 698 E(C0) 53.6° 587
1.0	2.47 2.71	E(0°) 1397 E(C90) 51.0° 175 E(C0) 53.6° 147
1.5	3.70 4.07	E(0°) 621 E(C90) 51.0° 78 E(C0) 53.6° 65
2.0	4.94 5.43	E(0°) 349 E(C90) 51.0° 44 E(C0) 53.6° 37
2.5	6.17 6.78	E(0°) 224 E(C90) 51.0° 28 E(C0) 53.6° 23
3.0	7.41 8.14	E(0°) 155 E(C90) 51.0° 19 E(C0) 53.6° 16

— C0/C180 (Half-peak divergence: 107.2°)
— C90/C270 (Half-peak divergence: 102.0°)



Cable

Type of cable power + signal cable; Length 1000 mm; insulation double without shielding; section 2.5 mm²; cable gland: no; colors: black - blue - grey - brown - yellow-green.

Code

83239