


# Alux Pro



Ceiling Downlights | 198-264 V  
32 topLED 65 W DC - 70 W AC | CRI 80  
**81776W69**

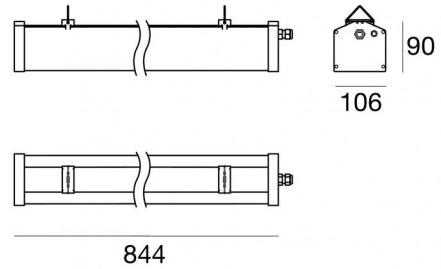

Technical data	
Type	Surface
Installation position	Ceiling
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Double Asymmetric
Light emission direction	downward
Nominal power	65 W DC
Total Power	70 W
Source lumens	10055 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP65
IK	IK06
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	No
Type of light emission	Single emission
Net weight	3.2 Kg
Electrostatic discharge protection	Yes
Surge protection	5 KV

Finishing casing	
Material	Aluminium 6060
Colour	Anodised Aluminum
Processing	20 µm anodizing
Finishing diffuser	
Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening



Ceiling Downlights | 198-264 V | 32 topLED 65 W DC - 70 W AC | CRI 80 | Base 81776W69

### Energy efficiency class

This product contains 2 light sources of energy efficiency class D.

### Illuminotechnical Features

Light Output Ratio (LOR)	88 %
Source lumens	10055 lm
Delivered lumens	8888 lm
Consumption	70 W
Luminaire efficacy	126 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C

### LED Life / Failure Ratio

L70 B20 C10 108000h (at Tj 65 Ta 25 )

### UGR

UGR axial	24.2
UGR transversal	27
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C90/C270 optics	76°
C0/C180 optics	121°
Light distribution simmetry	Symmetrical 2 assis


Single emission ceiling downlights for outdoor application. The warm white LED light source with a double asymmetric light distribution is composed of 32 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 10055 lm, with a 154.7 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised aluminum finish, processed by means of 20 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP65; the total weight is of 3.2 kg.

The total absorbed power is 70 W. The power supply cable is included and features a 1 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

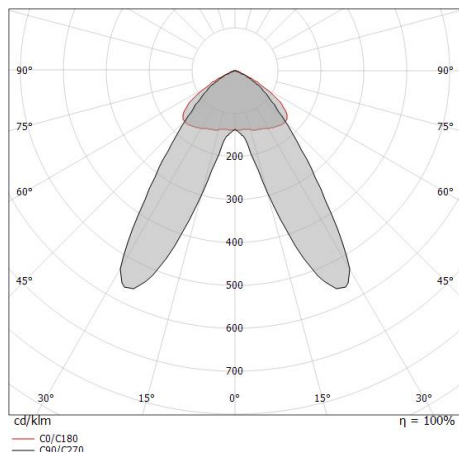

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.78 1.76	E(0°) 4877 E(C90) 4919 E(C0) 358
1.0	1.57 3.52	E(0°) 1219 E(C90) 1230 E(C0) 89
1.5	2.35 5.28	E(0°) 542 E(C90) 547 E(C0) 40
2.0	3.14 7.04	E(0°) 305 E(C90) 307 E(C0) 22
2.5	3.92 8.80	E(0°) 195 E(C90) 197 E(C0) 14
3.0	4.70 10.56	E(0°) 135 E(C90) 137 E(C0) 10

Distance [m]      Cone diameter [m]      illuminance [lx]

— C0/C180 (Half-peak divergence: 120.8°)  
— C90/C270 (Half-peak divergence: 76.2°)



#### Connector

Type of cable power cable; ; insulation single; section 1 mm<sup>2</sup>; cable gland: yes; colors: blue - brown - yellow-green.

**Code**

99737



#### Cable

Type of cable power cable; Length 1000 mm; insulation single; section 1 mm<sup>2</sup>; cable gland: pg7; colors: blue - brown - yellow-green.

**Code**

84863