


Periskop160 RGBW



Projectors | 198-264 V AC /180-275 V DC
1 arrayLED 37 W DC - 40 W AC | RGBW - 3000
81785V30

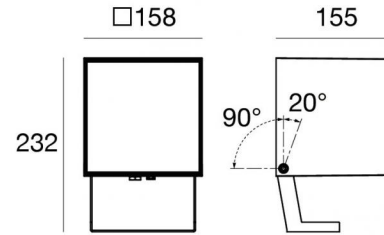

Technical data	
Type	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Medium Flood
Light emission direction	frontal
Nominal power	37 W DC
Total Power	40 W
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	RGBW - 3000 K
C.C. / C.V.	AC
Safety class	1
IP	IP66
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Control unit/Driver
Dimmable article	DMX-RDM
Directional	Swivelling
total angle (vertical plane)	110 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Net weight	4 Kg
Electrostatic discharge protection	Yes
Surge protection	1 KV
Product technological characteristics	TCS

Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	Black
Processing	Open pore anodizing + Powder Coating

Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

Finishing bracket

Material	AISI 304 steel
Colour	Black
Processing	Powder coating

Lumen RGBW

N. Led	Red	Green	Blue	white
1	522 lm	691 lm	169 lm	809 lm

Periskop160 RGBW



Projectors | 198-264 V AC /180-275 V DC | 1 arrayLED 37 W DC - 40 W AC | RGBW - 3000
81785V30

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio

Single emission projectors for outdoor application. The RGBW - 3000 K LED light source with a medium flood light distribution is composed of 1 arrayed LEDs with CCT of RGB-W 3000 K.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP66; the total weight is of 4 kg.

The total absorbed power is 37 W. The power supply cable is included and features a 0.2 m length.










The device features protection class I and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Periskop160 RGBW









Periskop160 RGBW | Projectors | Accessories
81785V30

		Diffuser - Diffuser to be mounted in combination with the C-U300032 accessory Diffuser Type: elliptical filter	Code <u>C-U300033</u>
		Anti-glare Anti-glare Type: directional blades. Material:Iron, colour:Black, processing:Powder coating.	Code <u>C-U300032</u>
		Anti-glare Anti-glare Type: snoot. Material:Aluminium 6060, colour:Black, processing:Open pore anodizing + Powder Coating.	Code <u>C-U300028</u>
		Anti-glare Anti-glare Type: eyelid. Material:AISI 304 steel, colour:Black, processing:Powder coating.	Code <u>C-U300025</u>
		Connector - Continuity splitter Type of cable power + signal cable allinone; Length 200 + 200 + 5000 mm; insulation double with shielding for signal.	Code <u>99390</u>
		Connector - Start splitter Type of cable power + signal cable allinone; Length 5000 + 5000 + 200 mm; insulation double with shielding for signal.	Code <u>98985</u>
		Connector - DMX line closure adapter for ALLinONE cables Type of cable power + signal cable allinone; ; insulation double with shielding for signal.	Code <u>98986</u>
		Bag / Fixing kit - Belt for installation on tree	Code <u>99802</u>

Periskop160 RGBW



Periskop160 RGBW | Projectors | Accessories
81785V30

 <p>L. 5m</p>	<p>Cable and connector</p> <p>Type of cable power + signal cable allinone; Length 5000 mm; insulation double with shielding for signal; external diameter: 12.6 mm.</p>	<p>Code</p> <p><u>98663</u></p>
 <p>L. 1m</p>	<p>Cable and connector</p> <p>Type of cable power + signal cable allinone; Length 1000 mm; insulation double with shielding for signal; external diameter: 12.6 mm.</p>	<p>Code</p> <p><u>98662</u></p>
 <p>L. 5m</p>	<p>Cable and connector</p> <p>Type of cable power + signal cable allinone; Length 5000 mm; insulation double with shielding for signal; external diameter: 12.6 mm; colors: white - blue - red - grey - brown - yellow-green.</p>	<p>Code</p> <p><u>98661</u></p>
 <p>L. 1m</p>	<p>Cable and connector</p> <p>Type of cable power + signal cable allinone; Length 1000 mm; insulation double with shielding for signal; external diameter: 12.6 mm; colors: white - blue - red - grey - brown - yellow-green.</p>	<p>Code</p> <p><u>98660</u></p>
  <p>L. 5m</p>	<p>Picket</p> <p>installation position: land,Cover material: pc</p>	<p>Code</p> <p><u>98549</u></p>