



Ceiling Downlights | 198-264 V
1 arrayLED 33 W DC - 36 W AC | CRI 80
81888M30



Technical data	
Type	Surface
Installation position	Ceiling
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Flood
Light emission direction	downward
Nominal power	33 W DC
Total Power	36 W
Source lumens	4777 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP65
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI - PUSH DIM
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	2.8 Kg
Electrostatic discharge protection	Yes
Surge protection	1 KV
Optics technology	Set-back low glare optics

Finishing casing	
Material	Die-cast Aluminium EN AB - 46100
Colour	Dark brown
Processing	Open pore anodizing + Powder Coating
Finishing diffuser	
Material	Extra clear glass
Colour	transparent
Processing	Silk-screening

Ceiling Downlights | 198-264 V | 1 arrayLED 33 W DC - 36 W AC | CRI 80 | Base
81888M30

Single emission ceiling downlights for outdoor application. The super warm white LED light source with a flood light distribution is composed of 1 arrayed LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 4777 lm, with a 144.8 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a dark brown finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass with a silk-screening treatment. The ingress protection degree is IP65; the total weight is of 2.8 kg.

The total absorbed power is 36 W.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	66 %
Source lumens	4777 lm
Delivered lumens	3198 lm
Consumption	36 W
Luminaire efficacy	88 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio


L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR

UGR axial	11.8
UGR transversal	11.8
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	26°
Light distribution simmetry	Symmetrical

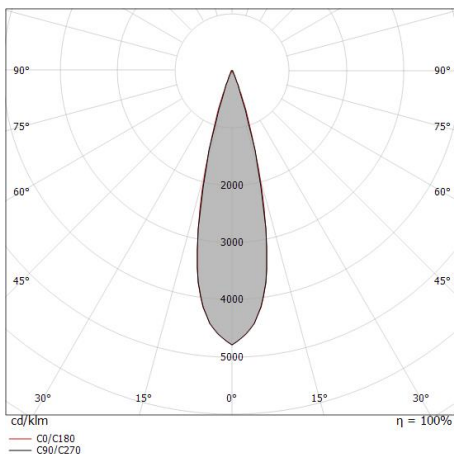

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.23	E(0°) 61255 E(C90) 13.1° 28646 E(C0) 13.2° 28537
1.0	0.47	E(0°) 15314 E(C90) 13.1° 7162 E(C0) 13.2° 7134
1.5	0.70	E(0°) 6806 E(C90) 13.1° 3183 E(C0) 13.2° 3171
2.0	0.93	E(0°) 3828 E(C90) 13.1° 1790 E(C0) 13.2° 1764
2.5	1.16	E(0°) 2450 E(C90) 13.1° 1146 E(C0) 13.2° 1141
3.0	1.40	E(0°) 1702 E(C90) 13.1° 796 E(C0) 13.2° 793

Distance [m] Cone diameter [m] illuminance [lx]

— C0/C180 (Half-peak divergence: 26.4°)
 — C90/C270 (Half-peak divergence: 26.2°)