
#### Projectors | 176-264 V 1 arrayLED 27 W DC - 30 W AC | CRI 98 82114N66





Technical data	
Туре	Track
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	arrayLED
Optics	Shaper Long Distance
Light emission direction	frontal
Nominal power	27 W DC
Total Power	30 W
Source lumens	3851 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	176 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	4000 K
Colour rendering index	98 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI-2 - PUSH DIM
Directional	Swivelling
total angle (vertical plane)	90 °
total angle (horizontal plane)	360 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	1.45 Kg
Electrostatic discharge protection	Yes
Surge protection	2 KV

#### [H[ 🔤 <€ 🕱 🕐 🗆 🖨 📼 📑 🖸



Finishing casing	l
Material	Die-cast Aluminium EN AB - 46100
Colour	Black
Processing	Powder coating

#### Projectors | 176-264 V | 1 arrayLED 27 W DC - 30 W AC | CRI 98 | Base 82114N66

Single emission projectors for indoor application. The natural white LED light source with a shaper long distance light distribution is composed of 1 arrayled LEDs with CCT of 4000 K and a CRI 98; the source luminous flux is 3851 lm, with a 142.6 lm/W nominal luminous efficacy.


The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of powder coating. The ingress protection degree is IP20; the total weight is of 1.45 kg.

The total absorbed power is 30 W.

The device features protection class II and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

#### 



C0/C180 (Half-peak divergence: 14.4°) C90/C270 (Half-peak divergence: 14.2°) Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features	
Light Output Ratio (LOR)	9 %
Source lumens	3851 lm
Delivered lumens	369 lm
Consumption	30 W
Luminaire efficacy	12 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	98 Ra
Black Body Locus	On
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	45°C


#### LED Life / Failure Ratio


L70 B10 C0 252000h (at Tj 65 Ta 25 )

UGR	
UGR axial	-5.3
UGR transversal	-5.3
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
C0/C180 optics	14°
Light distribution simmetry	Symmetrical

COLOR VECTOR GRAPHIC



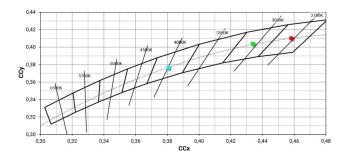

#### Pound Shaper\_distance | Projectors | Accessories 82114N66

and a second	8 1 148 31 148	Power supply - White Right power supply header (9001/W) Material:PC, colour:white.	<b>Code</b> 81033
	95 95 95 95 95 95 95 95 95 95 95 95 95 9	Power supply - White left power supply header (9002/W) Material:PC, colour:white.	<b>Code</b> 81036
	95 96 31 148	Power supply - Black left power supply header (9002/B) Material:PC, colour:black.	<b>Code</b> 81037
	8 <u>95</u> 31 146	Power supply - Black Right power supply header (9001/B) Material:PC, colour:black.	<b>Code</b> 81034
svěčekl		Closing cap - White end cap 9004/W Material:PC, colour:white.	<b>Code</b> 80999
		Closing cap - Black end cap 9004/B Material:PC, colour:black.	<b>Code</b> 81000
sruccul		Closing cap - Recessed white end cap 9004-R/W Material:PC, colour:white.	<b>Code</b> 81002
		Closing cap - Recessed black end cap 9004-R/B Material:PC, colour:black.	<b>Code</b> 81003
	Lines Links Onese and the State State		N-

#### Pound Shaper\_distance | Projectors | Accessories 82114N66

0	0185 0145	Closing cap - White gasket (S-9001/115-W) Material:white.		<b>Code</b> 81084
0	9145 0145	Closing cap - Black gasket (S-9001/115-B) Material:black, colour:black.		<b>Code</b> 81085
		Ceiling rose - 1.5m white pendant luminaires kit + bracket (9000-KIT5-1,5-W) Material:plastic, colour:white.		<b>Code</b> 81012
•		Ceiling rose - 1.5m black pendant luminaires kit + bracket ((9000-KIT5-1,5-B) Material:plastic, colour:black.		<b>Code</b> 81014
		Ceiling rose - 5m white pendant luminaires kit + bracket (9000-KIT5-5-W) Material:plastic, colour:white.		<b>Code</b> 81013
•		Ceiling rose - 5m black pendant luminaires kit + bracket (9000-KIT5-5-B) Material:plastic, colour:black.		<b>Code</b> 81015
6/9		Bracket - Anodized fixing bracket (S-9000/131) L=35mm, H=14mm, D=24mm. Material:Aluminium, colour:translucent.	Finish Anod. Al.	Code 81086
5 - 20 5 - 20 5 - 20	E 24 180 S	Bracket - Anodized stiffening bracket (S-9000/333) L=180mm, H=24mm, D=26mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.	Finish	<b>Code</b> 81024

Pound Shaper\_distance | Projectors | Accessories 82114N66

	24 180 R	Bracket - White stiffening bracket (S-9000/333-W) L=180mm, H=24mm, D=20mm. Material:Aluminium, colour:white RAL 9010, processing:Coating.	Finish White	Code 81025
R. R.	[1] 24 180 원	Bracket - Black stiffening bracket (S-9000/333-B) L=180mm, H=24mm, D=20mm. Material:Aluminium, colour:black RAL 9005, processing:Coating.	Finish Black	<b>Code</b> 81026
	2 [[5]] 24 40	Bracket - White fixing braket (S-9000/131-W) L=35mm, H=14mm, D=24mm. Material:Aluminium, colour:white, processing:Coating.	Finish White	<b>Code</b> 81087
1-1-1-	Z [[]	Bracket - Black fixing braket (S-9000/131-B) L=35mm, H=14mm, D=24mm. Material:Aluminium, colour:Black, processing:Coating.	Finish Black	<b>Code</b> 81088
- And		Junction - White electrical junction - internal (9003/W) Type linear. Material:PC, colour:white.	Finish White	<b>Code</b> 81039
		Junction - Black electrical junction - internal (9003/B) Type linear. Material:PC, colour:black.	Finish Black	<b>Code</b> 81040
1. · · · · · · · · · · · · · · · · · · ·	I Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Constant Cons	Junction - White power supply junction - central (9010/W) Type linear. Material:PC, colour:white.	Finish White	<b>Code</b> 81042
		Junction - White L junction - internal (9011/W) Type linear. Material:PC, colour:white.	Finish White	<b>Code</b> 81045

### Pound Shaper\_distance | Projectors | Accessories 82114N66

234 • • • • • • • • • • • • • • • • •	Junction - White L junction - external (9012/W) Type linear. Material:PC, colour:white.	<b>Finish</b> White	<b>Code</b> 81048
	Junction - Flexible white junction (9018/W) Type flexible curve. Material:PC, colour:white.	Finish White	<b>Code</b> 81066
9 	Junction - White X junction (9017/W) Type linear. Material:PC, colour:white.	Finish White	<b>Code</b> 81063
254 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Junction - Left white T junction - external (9013/W) Type linear. Material:PC, colour:white.	Finish White	<b>Code</b> 81051
254 1 8 ••••••••••••••••••••••••••••••••••	Junction - Right white T junction - external (9014/W) Type linear. Material:PC, colour:white.	Finish White	<b>Code</b> 81054
254 1 8 •mm. • 148	Junction - Left white T junction - internal (9015/W) Type linear. Material:PC, colour:white.	Finish White	<b>Code</b> 81057
254 • • • • • • • • • • • • • • • • • • •	Junction - Right White T junction - internal (9016/W) Type linear. Material:PC, colour:white.	Finish White	<b>Code</b> 81060
E Contra 0 antina 0	Junction - Black power supply junction - centrale (9010/B) Type linear. Material:PC, colour:black.	Finish Black	<b>Code</b> 81043
		Type linear:       Material PC, colour.white.         Image: Section of the	Junction - Write L junction - external (9012/W)       Write         Type Invas:       Junction - Flexible white junction (9018/W)       Finish         Junction - Flexible white junction (9018/W)       Finish         Write       Junction - Flexible white junction (9017/W)       Finish         Junction - Write X junction (9017/W)       Finish       Write         Junction - Write X junction (9017/W)       Finish       Write         Junction - Write X junction (9017/W)       Type Inves:       Write         Junction - Util white T junction - external (9013/W)       Finish       Write         Junction - Right white T junction - external (9014/W)       Finish       Write         Junction - Left white T junction - internal (9014/W)       Finish       Write         Junction - Left white T junction - internal (9015/W)       Finish       Write         Junction - Left white T junction - internal (9015/W)       Finish       Write         Junction - Right White T junction - internal (9016/W)       Finish       Write         Junction - Right White T junction - internal (9016/W)       Finish       Write         Junction - Right White T junction - internal (9016/W)       Finish       Write         Junction - Bick power supply junction - centrale (9010B)       Finish       Write         Junction - Black power supply junction

### Pound Shaper\_distance | Projectors | Accessories 82114N66

	Junction - Black L junction - internal (9011/B) Type linear. Material:PC, colour:black.	Finish Black	Code 81046
	Junction - Black L junction - external (9012/B) Type linear. Material:PC, colour:black.	Finish Black	<b>Code</b> 81049
	Junction - Flexible black junction (9018/B) Type flexible curve. Material:PC, colour:black.	Finish Black	<b>Code</b> 81067
	Junction - Black X junction (9017/B) Type linear. Material:PC, colour:black.	Finish Black	<b>Code</b> 81064
254 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Junction - Black left T junction - external (9013/B) Type linear. Material:PC, colour:black.	Finish Black	<b>Code</b> 81052
254 6 6 6 148	Junction - Right black T junction - external (9014/B) Type linear. Material:PC, colour:black.	Finish Black	<b>Code</b> 81055
254 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Junction - Left black T junction - internal (9015/B) Type linear. Material:PC, colour:black.	Finish Black	<b>Code</b> 81058
700 148	Junction - Right black T junction - internal (9016/B) Type linear. Material:PC, colour:black.	Finish Black	<b>Code</b> 81061
Lines Links Crows many the right with		and the Ala	

7/12 21.12.2024

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

linealight.com

### Pound Shaper\_distance | Projectors | Accessories 82114N66

	Suspensions - 1.5m white pendant luminaires kit (9000-KIT3-1,5-W) Material:plastic, colour:white.	<b>Coo</b> 810
	Suspensions - 5m white pendant luminaires kit (9000-KIT3-5-W) Material:plastic, colour:white.	<b>Cor</b> 810
*	Suspensions - 1.5m black pendant luminaires kit (9000-KIT3-1,5-B) Material:plastic, colour:black.	<b>Co</b> 0 810
*	Suspensions - 5m black pendant luminaires kit (9000-KIT3-5-B) Material:plastic, colour:black.	<b>Co</b> 810
And A	Suspensions - White rigid suspension clip (S-9000-P2-W) Material:plastic, colour:white.	Co 811
	Suspensions - Black rigid suspension clip (S-9000-P2-B) Material:plastic, colour:black.	<b>Co</b> 81
	Suspensions - White rigid suspension 1m (S-9000-P3-W) Material:plastic, colour:white.	<b>C</b> a 81
Ì	Suspensions - Black rigid suspension 1m (S-9000-P3-B) Material:plastic, colour:black.	<b>Cc</b> 81

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

8/12 21.12.2024

0

### Pound Shaper\_distance | Projectors | Accessories 82114N66

		Cable cover - White recessed cover (S-9001-R/6-W) Material:PC, colour:white.	<b>Code</b> 81069
		Cable cover - White cover for recessed junction (S-9010-R/6-W) Material:PC, colour:white.	<b>Code</b> 81072
		Cable cover - White cover for recessed L junction (S-9011-R/6-W) Material:PC, colour:white.	<b>Code</b> 81075
		Cable cover - White cover for recessed T junction (S-9013-R/6-W) Material:PC, colour:white.	<b>Code</b> 81078
	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Cable cover - White cover for recessed X junction (S-9017-R/6-W) Material:PC, colour:white.	<b>Code</b> 81081
		Cable cover - Black recessed cover (S-9001-R/6-B) Material:PC, colour:black.	<b>Code</b> 81070
	• ========	Cable cover - Black cover for recessed junction (S-9010-R/6-B) Material:PC, colour:black.	<b>Code</b> 81073
		Cable cover Material:PC, colour:black.	<b>Code</b> 81076
9/12 21.12.2024		hout any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. N	linealight com

9/12 21.12.2024 product, relativ

product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

linealight.com

#### Pound Shaper\_distance | Projectors | Accessories 82114N66

		Cable cover - Black cover for recessed T junction (S-9013-R/6-B) Material:PC, colour:black.	<b>Code</b> 81079
		Cable cover - Black cover for recessed X junction (S-9017-R/6-B) Material:PC, colour:black.	<b>Code</b> 81082
		Cable cover Material:white.	Code 83249
		Cable cover Material:black, colour:black.	<b>Code</b> 83250
- + + ···		White three-phase/DALI adapter (9009/W)	<b>Code</b> 81094
115-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1		White three-phase adapter (9009-4/W)	<b>Code</b> 8109 <sup>-</sup>
ALL OF		Black three-phase/DALI adapter (9009/B)	<b>Code</b> 81095
		Black trhee-phase adapter (9009-4/B)	<b>Code</b> 81093
0/12 21.12.2024	Linea Light Group reserves the right, with	out any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No ons and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or	linealight.co

product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

#### Pound Shaper\_distance | Projectors | Accessories 82114N66

		Tool - Cutter S-9000/T	<b>Code</b> 81005
J		Tool - Gobo holder Material:Aluminium, colour:black, processing:Anodisation.	<b>Code</b> 99853
	31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4 31.4	Track - Three-phase Recessed White DALI Track, 1 m (9000-1/W-R) Length: 1000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating.	FinishCodeWhite80990
	BLE SECTION OF SECTION	Track - Three-phase Recessed White DALI Track, 2 m (9000-2/W-R) Length: 2000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating.	Finish Code White 80991
	91.4 (1) (1) (1) (1) (1) (1) (1) (1)	Track - Trhee-phase Recessed White DALI Track, 3 m ( 9000-3/W-R) Length: 3000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating.	Finish Code White 80992
	31.4 (1) (1) (1) (1) (1) (1) (1) (1)	Track - Three-phase Recessed Grey DALI Track, 1 m (9000-1/B-R) Length: 1000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating.	FinishCodeBlack80993
	31.4 (1) (1) (1) (1) (1) (1) (1) (1)	Track - Three-phase Recessed Black DALI Track, 2 m (9000-1/B-R) Length: 2000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating.	FinishCodeBlack80994
		Track - Three-phase Recessed Black DALI Track, 3 m (9000-3/B-R) Length: 3000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating.	Finish Code Black 80995

### Pound Shaper\_distance | Projectors | Accessories 82114N66

37.8 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Track Uength: 1000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating.	
37.8 0.7 0.0 0.0 0.0 0.0 0.0 0.0 0.0	Track Length: 2000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating.	
37.8 0.7 0.0 0.0 0.0 0.0 0.0 0.0 0.0	Track Length: 3000mm; Type of track: Standard. Material:Aluminium, colour:White, processing:Coating.	
	Track Length: 1000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating.	
37.8 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Track Length: 2000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating.	
37.8 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Track Length: 3000mm; Type of track: Standard. Material:Aluminium, colour:Black, processing:Coating.	
	Electronic accessory - TWIL-DALI controller for devices with DALI protocol installed on three-phase track. installation position: ceiling L=90mm, H=124mm, D=45mm. Material:ABS Plastic, colour:black.	<b>Code</b> C-E70000