

# Ribbon PRO




LED Strip | 400 topLED 48 W DC 24 V | 9.6 W/m  
1367 Lm/m | CRI >90

82129




Technical data	
Length	5000 mm
Minimum cut	100 mm
Type	LED Strip
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward
Nominal power	48 W DC
Power / m	9.6 W / m
Source lumens	6835 lm
Source lumens / m	1367 lm / m
Input voltage range	24V
CCT / Tone	2700 K
Colour rendering index	>90 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP20
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.3 m
Resin potting	No
Type of light emission	Single emission
Length	5000 mm
Net weight	0.09 Kg
Electrostatic discharge protection	No
Surge protection	No

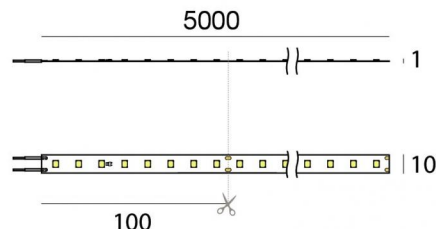



## Finishing casing


Colour	white
--------	-------


## Electronics

	99331 On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 3 art.)
---	---

	99332 1-10V Controller (1 - 3 art.)
---	--

	99374 On/Off Driver 198~264V AC / 176~275V DC 75 W (1 art.)
---	--

	83333 Push and Simply Dim - DALI-2 Controller (1 - 3 art.)
---	---

	C-E400002 Push and Simply Dim - DALI-2 Controller (1 - 5 art.)
---	---

## Cables Electrification

Max cable length	300 mm
------------------	--------



LED Strip | 400 topLED 48 W DC 24 V | 9.6 W/m | 1367 Lm/m | CRI >90 | Base  
82129

Single emission led strip for indoor application. The super warm white LED light source with a diffused light distribution is composed of 400 topped LEDs with CCT of 2700 K and a CRI >90; the source luminous flux is 6835 lm, with a 142.4 lm/W nominal luminous efficacy.

The device body and features a white finish. The ingress protection degree is IP20; the total weight is of 0.09 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 48 W. The power supply cable is included and features a 0.3 m length.

The device features protection class III and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class E.



### Illuminotechnical Features


Light Output Ratio (LOR)	100 %
Source lumens	6835 lm
Delivered lumens	6835 lm
Consumption	48 W
Luminaire efficacy	142 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Standard Operating Ambient Temperature	-20 / +55°C

### UGR

UGR axial	30
UGR transversal	30.5
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C90/C270 optics	116°
C0/C180 optics	120°
Light distribution symmetry	Symmetrical 2 axis

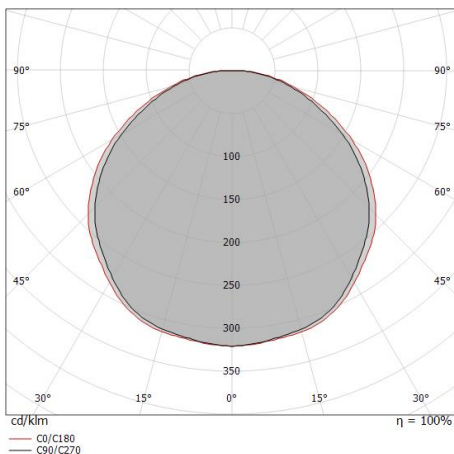

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.60 1.75	E(0°) 8768 E(C90) 58.0° 653 E(C0) 60.2° 538
1.0	3.20 3.49	E(0°) 2192 E(C90) 58.0° 163 E(C0) 60.2° 135
1.5	4.80 5.24	E(0°) 974 E(C90) 58.0° 73 E(C0) 60.2° 60
2.0	6.40 6.98	E(0°) 548 E(C90) 58.0° 41 E(C0) 60.2° 34
2.5	8.00 8.73	E(0°) 351 E(C90) 58.0° 26 E(C0) 60.2° 22
3.0	9.60 10.48	E(0°) 244 E(C90) 58.0° 18 E(C0) 60.2° 15

— C0/C180 (Half-peak divergence: 120.4°)  
— C90/C270 (Half-peak divergence: 116.0°)





# Ribbon PRO



LED Strip | 400 topLED 48 W DC 24 V | 9.6 W/m | 1367 Lm/m | CRI >90

82129

## Components

		LUNO_20/27 - Profili   Modular	<b>Code</b> <u>C-K100017</u>
		LUNO_20/27	<b>Code</b> <u>C-K100018</u>
		Rive_17/16 - Profili   Modular	<b>Code</b> <u>C-K100015</u>
		Rive_17/16 - Profili   Modular	<b>Code</b> <u>C-K100016</u>
		Cela_18/18 - Profili   Modular	<b>Code</b> <u>C-K100019</u>
		Cela_18/18 - Profili   Modular	<b>Code</b> <u>C-K100020</u>
		Tabulo_35/14 - Profili   Modular	<b>Code</b> <u>C-K100025</u>
		Fylo+ Recessed_2	<b>Code</b> <u>65007 - 65006</u>



LED Strip | 400 topLED 48 W DC 24 V | 9.6 W/m | 1367 Lm/m | CRI >90  
**82129**

## Components

		<b>Fylo+ Recessed_1</b>	<b>Code</b> <u>65027 - 65028</u>
		<b>Fylo+ Recessed_3</b>	<b>Code</b> <u>65003 - 65004</u>
		<b>Fylo+ Recessed_4</b>	<b>Code</b> <u>65009 - 65010</u>
		<b>Fylo+ Recessed_5</b>	<b>Code</b> <u>65012 - 65013</u>
		<b>Fylo+ Surface_1</b>	<b>Code</b> <u>65015 - 65016</u>
		<b>Fylo+ Surface_2</b>	<b>Code</b> <u>65018 - 65019</u>
		<b>Fylo+ Surface_3</b>	<b>Code</b> <u>65021 - 65022</u>
		<b>Fylo+ Surface_4</b>	<b>Code</b> <u>65024 - 65025</u>



LED Strip | 400 topLED 48 W DC 24 V | 9.6 W/m | 1367 Lm/m | CRI >90  
**82129**

## Components



















Fylo+ Direct\_1

















**Code**

65181 - 65180



 <p><b>5x</b></p>	 <p>25 30 6,8</p>	<p>Springs for recessing - 5 pieces</p>	<p><b>Code</b> 98420</p>
	 <p>2,5 18 2000</p>	<p>Diffuser Diffuser Type: opaline diffuser. Material:PC, colour:opaline.</p>	<p><b>Finish</b> Opaline <b>Code</b> 98395</p>
	 <p>15 2000</p>	<p>Diffuser</p>	<p><b>Code</b> 98941</p>
	 <p>15 2000</p>	<p>Diffuser</p>	<p><b>Code</b> 98942</p>
	 <p>15 2000</p>	<p>Diffuser - Opaline Diffuser</p>	<p><b>Code</b> 98943</p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p><b>Code</b> 98898</p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p><b>Code</b> 98899</p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p><b>Code</b> 98900</p>



		Diffuser		<b>Code</b> 98917
		Diffuser		<b>Code</b> 98925
		Diffuser Material:PC, colour:black.	<b>Finish</b> Black	<b>Code</b> 83132
		Diffuser Material:PC, colour:opaline.	<b>Finish</b> Opaline	<b>Code</b> C-K200001
		Diffuser Material:PC, colour:black.	<b>Finish</b> Black	<b>Code</b> C-K200002
		Diffuser Material:PC, colour:opaline.	<b>Finish</b> Opaline	<b>Code</b> C-K200003
		Diffuser Material:PC, colour:black.	<b>Finish</b> Black	<b>Code</b> C-K200004
		Diffuser Material:PC, colour:opaline.	<b>Finish</b> Opaline	<b>Code</b> C-K200005



Diffuser  
Material:PC, colour:opaline.

**Finish**  
Opaline **Code**  
C-K200007



Diffuser  
Material:PC, colour:black.

**Finish**  
Black **Code**  
C-K200009



Closing cap

**Code**  
98418



Closing cap - Closing cap  
Material:PC, colour:white.

**Code**  
98892



Closing cap

**Code**  
98928



Closing cap

**Code**  
98896



Closing cap

**Code**  
98902



Closing cap  
Material:Aluminium, colour:translucent.

**Code**  
98907





		<p>Closing cap Material:PC, colour:white.</p>	<p><b>Code</b> <u>98922</u></p>
		<p>Closing cap Material:PC, colour:white.</p>	<p><b>Code</b> <u>98918</u></p>
		<p>Closing cap Material:PC, colour:black.</p>	<p><b>Code</b> <u>83133</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p><b>Code</b> <u>C-V400023</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p><b>Code</b> <u>C-V400019</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p><b>Code</b> <u>C-V400020</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p><b>Code</b> <u>C-V400021</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p><b>Code</b> <u>C-V400022</u></p>




		<p>Closing cap Material:plastic, colour:grey.</p>	<p><b>Code</b> <u>C-V400025</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p><b>Code</b> <u>C-V400027</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p><b>Code</b> <u>C-V400029</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p><b>Code</b> <u>C-V400031</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p><b>Code</b> <u>C-V400033</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p><b>Code</b> <u>C-V400035</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p><b>Code</b> <u>C-V400036</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p><b>Code</b> <u>C-V400038</u></p>



		<p>Closing cap Material:plastic, colour:grey.</p>	<p><b>Code</b> C-V400037</p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p><b>Code</b> C-V400041</p>
		<p>Bracket - Mounting bracket L=19mm, H=8mm, D=9mm. Material:Iron, colour:zinc, processing:Washing.</p>	<p><b>Code</b> 98944</p>
		<p>Bracket L=9mm, H=8.8mm, D=21.8mm. Material:Iron, colour:translucent, processing:Washing.</p>	<p><b>Code</b> 98931</p>
		<p>Bracket L=22mm, H=21.5mm, D=16.4mm. Material:PC, colour:transparent.</p>	<p><b>Finish</b> Transp.</p> <p><b>Code</b> 98904</p>
		<p>Bracket L=12mm, H=15mm, D=30mm. Material:PC, colour:white.</p>	<p><b>Finish</b> White</p> <p><b>Code</b> 98901</p>
		<p>Profile - Wall integrated side profile Material:Aluminium 6060, colour:Anodised Aluminum, processing:20 µm anodizing.</p>	<p><b>Code</b> 98921</p>
		<p>Connector - Fast connector for Ribbon Plus 10mm - Ribbon PRO - Ribbon PRO 48V Length 21,6 mm.</p>	<p><b>Code</b> 83398</p>



Ribbon PRO | LED Strip | Accessories  
**82129**




Connector  
 Length 15,4 mm.

**Code**  
83399



Optics  
 Light distribution: medium flood,Cover material: pc

**Code**  
C-U100001




Bag / Fixing kit

**Code**  
C-K100027



Bag / Fixing kit

**Code**  
C-K100028



Bag / Fixing kit

**Code**  
C-K100029